
Article no. 12361253

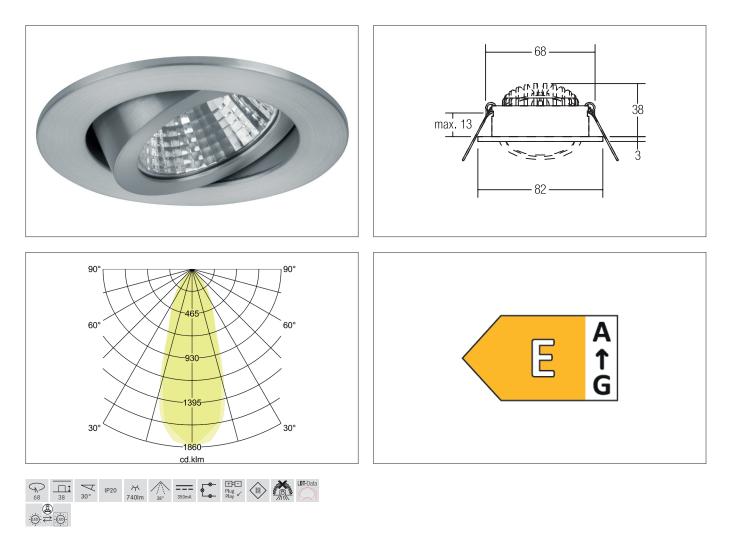

Tender

Round LED recessed spotlight, tool-free ceiling installation using installation springs. Ceiling cut-out Ø 68 mm, installation depth 38 mm, outer diameter 82 mm, weight 0.104 kg, silver reflector with rotationally symmetrical deep-wide beam light distribution. Transparent plastic cover, rated luminous flux 740 lm, rated wattage 1 x 7 W, light color warm white, most similar color temperature (CCT) 3,000 K, general co-lor rendering index CRI > 80, service life L70/B50 at 25 °C: 50,000 h, housing material: aluminum / polycarbonate, color: aluminum, permissible ambient temperature (ta): -20 °C - +25 °C, protection class (EN 61140): III, degree of protection (DIN EN 60529): IP20. For connection to an external control gear, which is not included with the luminaire. Dimmable depending on the control gear.

Product Benefits

- Runder Einbaustrahler aus massivem Aluminium mit Polycarbonatabdeckung.
- Einfache und werkzeuglose Montage.
- CRI > 80.
- Geringe Einbautiefe 38 mm, Durchmesser 82 mm, Deckenausschnitt 68 mm.
- Deckenstärke maximal 13 mm.
- Große Artikelvarianz hinsichtlich Gehäusefarbe und Farbtemperatur.
- Bestromung mit 350 mA.
- Auch als schaltbares oder dimmbares Set (Phasenabschnitt) lieferbar.
- Alternativ in Bauform quadratisch verfügbar.



Article no. 12361253

Article data	
Article no.	12361253
GTIN	4250047795513
Series name	SEVEN-R
Short description	LED-Einbaustrahler
Material	Aluminium / Polycarbonate
Colour	Alu
Type of surface	Matt
Shape	Round
Outer diameter	82 mm
Built-in diameter	68 mm
Installation depth	38 mm
Hight	3 mm
Weight	0.104 kg
Conformance	CE, UKCA

Lighting technology	
Colour temperature	3.000 К
Light colour	White
Light output	Direct
Luminous flux	740 lm
System efficiency	106 lm/W
Colour rendering	CRI > 80
Reflector	Faceted
Reflector colour	silver
Beam angle	38°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
Voltage type	DC
Current	350 mA
Lamp	LED
Lamp holder	Plug&Play
Protection class	
Degree of protection	IP20
Dimmable	Depending on type of control gear
Control	Depending on driver
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Rated life time L70/B50 at 25 °C	50,000 h
Energy efficiency class	E

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Pivoted
Swivel angle	30°
Max. ceiling thickness	13 mm
Further references	No cover with thermal insulation material
Material cover	Plastic, transparent
Suitable for through-wiring	Yes, with optional accessories

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 19.05.2025 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/

Article no. 12361253

Packing data	
Gross weight	0.125 kg
Length of packaging	85 mm
Packaging width	43 mm
Packaging hight	85 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.
	By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.

Article no. 12361253

 Ticle no: 1762000 Eb converter 350 mA, on / off switchable pier: 1 - 7,2 W, Plug&Play imensions: 60 mm x 35 mm x 21 mm tip: //www.brumberg.com/fileadmin/products/Datenblatt_12662000_2021_DE.pdf ticle no: 17662020 Eb converter 350 mA, on / off switchable www.trumberg.com/fileadmin/products/Datenblatt_12662020_2021_DE.pdf ticle no: 17663000 Eb converter 350 mA, trailing-edge phase dimmable www.trumberg.com/fileadmin/products/Datenblatt_12663000_2021_DE.pdf ticle no: 17663000 Eb converter 350 mA, trailing-edge phase dimmable www.trumberg.com/fileadmin/products/Datenblatt_12663000_2021_DE.pdf ticle no: 17663000 Eb converter 350 mA, trailing-edge phase dimmable www.trumberg.com/fileadmin/products/Datenblatt_12663000_2021_DE.pdf ticle no: 17663020 Eb converter 350 mA, trailing-edge phase dimmable www.trumberg.com/fileadmin/products/Datenblatt_12663020_2021_DE.pdf ticle no: 1763000 Eb converter 350 mA, no/off switchable www: 1. 15W, Pug&Play A. Anschlusstox imensions: 110 mm x 50 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_12663020_2021_DE.pdf ticle no: 17613000 Eb converter 350 mA, on/off switchable www: 1. 15W, Pug&Play A. Anschlusstox imensions: 115 mm x 34 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_12613020_2021_DE.pdf ticle no: 17613000 Eb converter 350 mA, on/off switchable www: 1. 15W, Pug&Play A. Anschlusstox imensions: 115 mm x 34 mm x 19 mm ttp://www.brumberg.com/fileadmin/products/Datenblatt_12613020_2021_DE.pdf ticle no: 17621000 Eb converter 350 mA, on/off switchable www: 1. 15W, Pug&Play A. Anschlusstox imensions: 115 mm x 34 mm x 19 mm ttp://www.brumberg.com/fileadmin/products/Datenblatt_12621020_2021_DE.pdf	Required accessories
ED converter 350 mA, on /off switchable wer: 1-7.2 W, Plug&Play Imensions: 68 mm x 35 mm x 21 mm tips://www.brumberg.com/fileadmin/products/Datenblatt_17662000_2021_DE.pdf title no: 17662020 ED converter 350 mA, on /off switchable wer: 1-7.2 W, Plug&Play + Anschlussbox imensions: 68 mm x 35 mm x 21 mm tips://www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf title no: 17663000 ED converter 350 mA, trailing-edge phase dimmable wer: 2.8 - 7 W, Plug&Play title a.0: 17663020 ED converter 350 mA, trailing-edge phase dimmable wer: 2.8 - 7 W, Plug&Play title no: 17663020 ED converter 350 mA, trailing-edge phase dimmable wer: 2.8 - 7 W, Plug&Play title no: 17663020 ED converter 350 mA, trailing-edge phase dimmable wer: 2.8 - 7 W, Plug&Play title no: 1761300 ED converter 350 mA, trailing-edge phase dimmable wer: 2.1 - 7 W, Plug&Play title no: 1761300 ED converter 350 mA, or off switchable wer: 1.1 - 15 W, Plug&Play title no: 1761300 ED converter 350 mA, on /off switchable wer: 1.1 - 15 W, Plug&Play title no: 17613020 ED converter 350 mA, on /off switchable wer: 1.1 - 15 W, Plug&Play + Anschlussbox imensions: 115 mm x 34 mm x 19 mm tips://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf title no: 17613020 ED converter 350 mA, on /off switchable wer: 1.1 - 15 W, Plug&Play + Anschlussbox imensions: 115 mm x 34 mm x 19 mm tips://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf title no: 1762100 ED converter 350 mA, on /off switchable wer: 1.2 1 W, Plug&Play + Anschlussbox imensions: 115 mm x 34 mm x 19 mm tips://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf title no: 1762100 ED converter 350 mA, on /off switchable wer: 1.2 1 W, Plug&Play + Anschlussbox imensions: 115 mm x 34 mm x 10 mm tips://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf title no: 1762020 ED converter 350 mA, on /off switchable wer: 4.2 - 7.W, Plug&Play + Anschlussbox imensions: 51 mm x 24 mm x 13 mm tips:/	
wer: 1 - 7,2 W, Plug&Pley imensions: 60 mx 35 mx 21 mx ttps://www.brumberg.com/fileadmin/products/Datenblatt_17.662000_2021_DE.pdf ticle no: 17.62000 ED converts 350 mA, cnoff switchable wer: 1 - 27, W, Plug&Pley + Anschlussbox imensions: 60 mx 35 mm x 21 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17.662020_2021_DE.pdf ticle no: 17.663000 ED converts 350 mA, trailing-edge phase dimmable wer: 2,8 - 7 W, Plug&Pley imensions: 10 mm x 50 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17.663000_2021_DE.pdf ticle no: 17.663000 ED converts 350 mA, trailing-edge phase dimmable wer: 2,8 - 7 W, Plug&Pley + Anschlussbox imensions: 110 mm x 50 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17.663020_2021_DE.pdf ticle no: 17.613000 ED converter 350 mA, on/off switchable wer: 1 - 15 W, Plug&Pley + Anschlussbox imensions: 110 mm x 50 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17.613000_2021_DE.pdf ticle no: 17.613000 ED converter 350 mA, on/off switchable wer: 1 - 15 W, Plug&Pley imensions: 115 mm x 34 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17.613000_2021_DE.pdf ticle no: 17.613000 ED converter 350 mA, on/off switchable swer: 1 - 15 W, Plug&Play + Anschlussbox imensions: 115 mm x 34 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17.613020_2021_DE.pdf title no: 17.61200 ED converter 350 mA, on/off switchable swer: 1 - 15 W, Plug&Play + Anschlussbox imensions: 115 mm x 44 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17.613000_2021_DE.pdf title no: 17.62100 ED converter 350 mA, on/off switchable swer: 1 - 21 W, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17.621000_2021_DE.pdf title no: 17.652000 ED-converter 350 mA, railing-edge phase dimmer swer: 4.9 - 7.W, Plug&Play + Amschlussbox imensions: 51 mm x 44 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17.652000_DID_plug&Pl	
<pre>imensions: 88 mm x 21 mm tass://www.brumberg.com/fileadmin/products/Datenblatt_17662000_2021_DE.pdf ticle no: 17662020 DD converter 350 mA, on/off switchable were: 1 - 7.2 W, Pug&Play + Anschlussbox imensions: 88 mm x 31 mm tass://www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf ticle no: 17663000 DD converter 350 mA, trailing-edge phase dimmable were: 28 - 7 W, Pug&Play imensions: 10 mm x 50 mm x 19 mm tass://www.brumberg.com/fileadmin/products/Datenblatt_17663000_2021_DE.pdf ticle no: 17663020 DD converter 350 mA, trailing-edge phase dimmable were: 28 - 7 W, Pug&Play imensions: 10 mm x 50 mm x 19 mm tass://www.brumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf ticle no: 17663020 DD converter 350 mA, trailing-edge phase dimmable were: 28 - 7 W, Pug&Play + Anschlussbox imensions: 10 mm x 50 mm x 19 mm tass://www.brumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf ticle no: 17613000 DD converter 350 mA, on/off switchable were: 1.a F N, Pug&Play + Anschlussbox imensions: 115 mm x 34 mm x 19 mm tass://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf ticle no: 17613020 DD converter 350 mA, on/off switchable were: 1.a F N, Pug&Play + Anschlussbox imensions: 115 mm x 34 mm x 19 mm taps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf ticle no: 17613020 DD converter 350 mA, on/off switchable were: 1.a F N, Pug&Play + Anschlussbox imensions: 115 mm x 34 mm x 19 mm taps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf ticle no: 17621000 DD converter 350 mA, on/off switchable were: 1.a F N, Pug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm taps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf ticle no: 17621020 DD converter 350 mA, on/off switchable were: 1.a F N, Pug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm taps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf ticle no: 1762000 DD converter 350 mA, on/off switchable were: 4.9 - 7 W, Pug&Play imension</pre>	
tigs://www.brumberg.com/fileadmin/products/Datenblatt_17662000_2021_DE.pdf trible no: 17662020 Deconvert 350 mA, on/off switchable Deconvert 350 mA, un/off switchable Deconvert 350 mA, un/off switchable Deconvert 350 mA, trailing-edge phase dimmable Deconvert 350 mA, on/off switchable Deconvert 350 mA, on/off switchab	
rticle no: 17662020 D converter 350 mA, on/off switchable Werr: 1 - 7, 2W, Plug&Play + Anschlussbox imensions: 68 mm x 35 mm x 21 mm tis://www.hrumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf rticle no: 17663000 D converter 350 mA, trailing-edge phase dimmable Werr: 28 - 7 W, Plug&Play Tricle no: 17663020 D converter 350 mA, trailing-edge phase dimmable Werr: 28 - 7 W, Plug&Play + Anschlussbox imensions: 110 mm x 50 mm x 19 mm tis://www.hrumberg.com/fileadmin/products/Datenblatt_17663000_2021_DE.pdf rticle no: 17663020 D converter 350 mA, trailing-edge phase dimmable Werr: 28 - 7 W, Plug&Play + Anschlussbox imensions: 110 mm x 50 mm x 19 mm tis://www.hrumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf rticle no: 17613000 D converter 350 mA, or/off switchable Werr: 1 - 15 W, Plug&Play + Anschlussbox Werr: 1 - 17 W, Plug&Play + Anschlussbox Werr: 4 - 7 W,	
ED converter 350 mA, on /off switchable wer: 1 - 7,2 W, Plug&Play + Anschlussbox imensions: 68 mm x 35 mm x 21 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf rticle no: r1663000 ED converter 350 mA, trailing-edge phase dimmable wer: 2, 4 - 7 W, Plug&Play imensions: 110 mm x 50 mm x 10 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17663000_2021_DE.pdf rticle no: r17643020 ED converter 350 mA, trailing-edge phase dimmable wer: 2, 4 - 7 W, Plug&Play + Anschlussbox imensions: 110 mm x 50 mm x 10 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf rticle no: r1764300 ED converter 350 mA, on/off switchable wer: 2, 4 - 7 W, Plug&Play + Anschlussbox imensions: 110 mm x 50 mm x 10 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf rticle no: r17613000 ED converter 350 mA, on/off switchable wer: 1 - 15 W, Plug&Play imensions: 115 mm x 34 mm x 10 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf rticle no: r17613020 ED converter 350 mA, on/off switchable wer: 1 - 15 W, Plug&Play + Anschlussbox imensions: 115 mm x 34 mm x 10 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf rticle no: r17621000 ED converter 350 mA, no/off switchable wer: 1 - 21 W, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf rticle no: r17621002 ED converter 350 mA, no/off switchable wer: 1 - 21 W, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf rticle no: r17621002 ED converter 350 mA, raling-edge phase dimmer wer: 4 - 7 W, Plug&Play + Anschlussbox imensions: 51 mm x 24 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf rticle no: r17652020 ED-round converter 350 mA, tralling-edge phase dimmer wer: 4,9 - 7 W, Plug&Play + Anschlussbox	
wer: 1 - 15 W, Plug&Play + Anschlussbox imensions: 68 mox 35 mm x 21 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf ttole no: 17663000 ED converter 350 md, trailing-edge phase dimmable wer: 2,4 - 7W, Plug&Play imensions: 110 mm x 50 mm x 19 mm tts://www.brumberg.com/fileadmin/products/Datenblatt_17663000_2021_DE.pdf ttole no: 17663020 ED converter 350 md, trailing-edge phase dimmable wer: 2,4 - 7W, Plug&Play + Anschlussbox imensions: 110 mm x 50 mm x 19 mm tts://www.brumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf ttole no: 17613000 ED converter 350 md, or/off switchable ower: 1 - 15 W, Plug&Play + Anschlussbox imensions: 115 mm x 34 mm x 19 mm ttp://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf ttole no: 17613000 ED converter 350 md, or/off switchable ower: 1 - 15 W, Plug&Play ED converter 350 md, or/off switchable ower: 1 - 15 W, Plug&Play + Anschlussbox imensions: 115 mm x 34 mm x 19 mm ttp://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf ttole no: 17613020 ED converter 350 md, or/off switchable ower: 1 - 15 W, Plug&Play + Anschlussbox imensions: 115 mm x 34 mm x 19 mm ttp://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf ttole no: 17621000 ED converter 350 md, or/off switchable ower: 1 - 10, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm ttp://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf ttole no: 17621020 ED converter 350 md, or/off switchable ower: 1 - 11, W, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm ttp://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf ttole no: 17652000 ED converter 350 md, trailing-edge phase dimmer ower: 4,9 - 7, W, Plug&Play + Anschlussbox imensions: 51 mm x 24 mm ttp://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf ttole no: 17652020 ED converter 350 md, trailing-edge phase dimmer ower: 4,9 - 7, W, Plug&Play + Anschlussbox	
intensions: 68 mm x 35 mm x 21 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf ttole no: 17663000 ED converter 350 mA, trailing-edge phase dimmable ower: 2.8 - 7 W, Plug&Play ED converter 350 mA, trailing-edge phase dimmable ower: 2.8 - 7 W, Plug&Play + Anschlussbox imensions: 110 mm x 50 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf ttole no: 17663020 ED converter 350 mA, on/off switchable ower: 2.8 - 7 W, Plug&Play + Anschlussbox imensions: 110 mm x 50 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf ttole no: 17613000 ED converter 350 mA, on/off switchable SU converter 350 mA, 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf ttole no:: 1762100 SU converter 350 mA, 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_1762100_2021_DE.pdf ttole no:: 1765200 ED-round converter 350 mA, trailing-edge phase dimmer Swer: 4 - 7 W, Plug&Play imensions: 12 mm x 24 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf ttole no:: 1765200 ED-round converter 350 mA, trailing-edge phase dimmer Swer: 4,9 - 7 W, Plug&Play + Anschlussbox	
ttps://www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf ttole no: 17663000 De converter 350 mA, trailing-edge phase dimmable ower: 2.8 - 7 W, Plug&Play imensions: 110 mm x 50 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17663000_2021_DE.pdf tticle no: 17663020 ED converter 350 mA, trailing-edge phase dimmable wer: 2.8 - 7 W, Plug&Play + Anschlussbox imensions: 110 mm x 50 mm x 19 mm ttps://www.bmmberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf ttole no:: 17613000 ED converter 350 mA, on/off switchable wer: 1 - 15 W, Plug&Play + Anschlussbox imensions:: 115 mm x 34 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf ttole no:: 17613020 ED converter 350 mA, on/off switchable ower: 1 - 15 W, Plug&Play + Anschlussbox imensions: 115 mm x 34 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf ttole no:: 17631020 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play + Anschlussbox imensions: 115 mm x 34 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf ttole	
ticle no.: 17663000 ED converter 350 mA, trailing-edge phase dimmable wer: 2.8 - 7 W, Plug&Play imensions: 110 mm x 50 mm x 19 mm tips://www.brumberg.com/fileadmin/products/Datenblatt_17663000_2021_DE.pdf ticle no.: 17643020 ED converter 350 mA, trailing-edge phase dimmable wer: 2.4 - 7 W, Plug&Play + Anschlussbox imensions: 110 mm x 50 mm x 19 mm tips://www.brumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf ticle no.: 17613000 ED converter 350 mA, or/off switchable wer: 1 - 15 W, Plug&Play imensions: 115 mm x 34 mm x 19 mm tips://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf ticle no.: 17613020 ED converter 350 mA, or/off switchable wer: 1 - 15 W, Plug&Play + Anschlussbox imensions: 115 mm x 34 mm x 19 mm tips://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf ticle no.: 17613020 ED converter 350 mA, on/off switchable wer: 1 - 15 W, Plug&Play + Anschlussbox imensions: 115 mm x 34 mm x 19 mm tips://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf ticle no.: 17621000 ED converter 350 mA, on/off switchable wer: 1 - 21 W, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm tips://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf ticle no.: 17621000 ED converter 350 mA, on/off switchable wer: 1 - 21 W, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm tips://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf ticle no.: 17621000 ED converter 350 mA, on/off switchable wer: 4,9 - 7 W, Plug&Play imensions: 51 mm x 24 mm tips://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf ticle no.: 17652000 ED-round converter 350 mA, trailing-edge phase dimmer wer: 4,9 - 7 W, Plug&Play + Anschlussbox imensions: 51 mm x 24 mm tips://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf ticle no.: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer wer: 4,9 - 7 W, Plug&Play + Anschlussbox	
ED converter 350 mA, trailing-edge phase dimmable ower: 2,8 - 7 W, Plug&Play imensions: 110 mm x 50 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17663000_2021_DE.pdf rticle no: 1763000 ED converter 350 mA, trailing-edge phase dimmable ower: 2,8 - 7 W, Plug&Play + Anschlussbox imensions: 110 mm x 50 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf rticle no: 17613000 ED converter 350 mA, or,off switchable ower: 1 - 15 W, Plug&Play imensions: 115 mm x 34 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf rticle no: 17613020 ED converter 350 mA, on/off switchable ower: 1 - 15 W, Plug&Play + Anschlussbox imensions: 115 mm x 34 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf rticle no: 17613020 ED converter 350 mA, on/off switchable ower: 1 - 15 W, Plug&Play imensions: 115 mm x 34 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf rticle no: 17621000 ED converter 350 mA, on/off switchable ower: 1 - 12 W, Plug&Play imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf rticle no: 17621020 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf rticle no: 17652000 ED converter 350 mA, on/off switchable ower: 4,9 - 7 W, Plug&Play + Anschlussbox imensions: 51 mm x 24 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf rticle no: 17652000 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play + Anschlussbox imensions: 51 mm x 24 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf rticle no: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play + Anschlussbox	
wer: 2.8 - 7 W, Plug&Play imensions: 110 mm x 50 mm x 19 mm tps://www.brumberg.com/fileadmin/products/Datenblatt_17663000_2021_DE.pdf tricle no:: 17663020 2D converter 350 mA, trailing-edge phase dimmable ower: 2.8 - 7 W, Plug&Play + Anschlussbox imensions:: 110 mm x 50 mm x 19 mm tps://www.brumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf tricle no:: 7613000 ED converter 350 mA, on/off switchable ower: 1 - 15 W, Plug&Play timensions:: 115 mm x 34 mm x 19 mm tps://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf tricle no:: 17613000 ED converter 350 mA, on/off switchable ower: 1 - 15 W, Plug&Play timensions:: 115 mm x 34 mm x 19 mm tps://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf tricle no:: 7621000 ED converter 350 mA, on/off switchable ower: 1 - 15 W, Plug&Play + Anschlussbox imensions:: 115 mm x 34 mm x 19 mm tps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf tricle no:: 7621000 ED converter 350 mA, on/off switchable ower: 1 - 12 W, Plug&Play imensions:: 128 mm x 30 mm x 13 mm tps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf tricle no:: 7621020 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play imensions:: 128 mm x 13 mm tps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf tricle no:: 17621020 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play + Anschlussbox imensions:: 128 mm x 50 mm x 13 mm tps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf tricle no:: 17621020 ED-round converter 350 mA, ruiling-edge phase dimmer ower: 4, 9 - 7 W, Plug&Play imensions: 51 mm x 24 mm tps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf <td>Article no.: 17663000</td>	Article no.: 17663000
imensions: 110 mm x 50 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17663000_2021_DE.pdf tricle no.: 17643020 ED converter 350 mA, trailing-edge phase dimmable wer: 2, 4 - 7W, Plug&Play + Anschlussbox imensions: 110 mm x 50 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf tricle no.: 17613000 ED converter 350 mA, on/off switchable wer: 1 - 15 W, Plug&Play imensions: 115 mm x 34 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf tricle no.: 17613020 ED converter 350 mA, on/off switchable ower: 1 - 15 W, Plug&Play + Anschlussbox imensions: 115 mm x 34 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf tricle no.: 17621000 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play + Anschlussbox imensions: 128 mm x 30 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf tricle no.: 17621000 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf tricle no.: 17621020 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf tricle no.: 17652000 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play imensions: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play imensions: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play thes://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf tricle no.: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play + Anschlussbox	LED converter 350 mA, trailing-edge phase dimmable
ttps://www.brumberg.com/fileadmin/products/Datenblatt_17663000_2021_DE.pdf tricle no.: 17663020 ED converter 350 mA, railing-edge phase dimmable ower: 2,8 - 7 W, Plug&Play + Anschlussbox imensions: 110 mm x 50 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf tricle no.: 17613000 ED converter 350 mA, on/off switchable ower: 1 - 15 W, Plug&Play + mensions: 115 mm x 34 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf tricle no.: 17613020 ED converter 350 mA, on/off switchable ower: 1 - 15 W, Plug&Play + Anschlussbox imensions: 115 mm x 4 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf tricle no.: 17621020 ED converter 350 mA, on/off switchable ower: 1 - 15 W, Plug&Play + Anschlussbox imensions: 125 mm x 4 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf tricle no.: 17621000 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf tricle no.: 17621020 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf tricle no.: 17621020 ED converter 350 mA, on/off switchable ower: 4,9 - 7 W, Plug&Play + Anschlussbox imensions: 128 mm x 10 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf tricle no.: 17652000 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play imensions: 51 mm x 24 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf tricle no.: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play + Anschlussbox	Power: 2,8 - 7 W, Plug&Play
ticle no.: 17663020 ED converter 350 mA, trailing-edge phase dimmable over: 2.8 - 7 W, Plug&Play + Anschlussbox imensions: 110 mm x 50 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf rticle no.: 17613000 ED converter 350 mA, on/off switchable over: 1 - 15 W, Plug&Play + Anschlussbox imensions: 115 mm x 34 mm x 19 mm tps://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf rticle no.: 17613020 ED converter 350 mA, on/off switchable over: 1 - 15 W, Plug&Play + Anschlussbox imensions: 115 mm x 34 mm x 19 mm tps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf rticle no.: 17621000 ED converter 350 mA, on/off switchable over: 1 - 15 W, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm tps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf rticle no.: 17621020 ED converter 350 mA, on/off switchable over: 1 - 21 W, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm tps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf rticle no.: 1762020 ED-converter 350 mA, on/off switchable over: 4 - 7 W, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm tps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf rticle no.: 17652000 ED-converter 350 mA, trailing-edge phase dimmer over: 4,9 - 7 W, Plug&Play imensions: 15 mm x 24 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf rticle no.: 17652000 ED-round converter 350 mA, trailing-edge phase dimmer over: 4,9 - 7 W, Plug&Play imensions: 20 mA, trailing-edge phase dimmer over: 4,9 - 7 W, Plug&Play + Anschlussbox	
ED converter 350 mA, trailing-edge phase dimmable ower: 2,8 - 7 W, Plug&Play + Anschlussbox imensions: 110 mm x 50 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf tricle no.: 17613000 ED converter 350 mA, on/off switchable ower: 1 - 15 W, Plug&Play + Anschlussbox imensions: 115 mm x 34 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf tricle no.: 17613020 ED converter 350 mA, on/off switchable ower: 1 - 15 W, Plug&Play + Anschlussbox imensions: 115 mm x 34 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf tricle no.: 17621000 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf tricle no.: 17621000 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf tricle no.: 17621020 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf tricle no.: 17621000 ED converter 350 mA, on/off switchable ower: 4 - 9 T W, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf tricle no.: 17652000 ED-round converter 350 mA, trailing-edge phase dimmer ower: 49 - 7 W, Plug&Play imensions: 51 mm x 24 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf tricle no.: 17652000 ED-round converter 350 mA, trailing-edge phase dimmer ower: 49 - 7 W, Plug&Play + Anschlussbox	https://www.brumberg.com/fileadmin/products/Datenblatt_17663000_2021_DE.pdf
<pre>over: 2,8 - 7 W, Plug&Play + Anschlussbox imensions: 110 mm x 50 mm x 19 mm tps://www.brumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf</pre> Tricle no.: 17613000 ED converter 350 mA, on/off switchable over: 1 - 15 W, Plug&Play imensions: 115 mm x 34 mm x 19 mm tps://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf Tricle no.: 17613020 ED converter 350 mA, on/off switchable ower: 1 - 15 W, Plug&Play + Anschlussbox imensions: 115 mm x 34 mm x 19 mm tps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf Tricle no.: 17621000 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play tricle no.: 17621000 ED converter 350 mm x 13 mm tps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf Tricle no:: 17621000 ED converter 350 mm x 13 mm tps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf Tricle no:: 17621000 ED converter 350 mm x 13 mm tps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Tricle no:: 17621000 ED converter 350 mm x 13 mm tps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Tricle no:: 17621000 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm tps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Tricle no:: 17652000 ED-round converter 350 mA, trailing-edge phase dimmer ower: 49 - 7 W, Plug&Play imensions: 51 mm x 24 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf Tricle no:: 17652002 ED-round converter 350 mA, trailing-edge phase dimmer ower: 49 - 7 W, Plug&Play + Anschlussbox ED-round converter 350 mA, trailing-edge phase dimmer ower: 49 - 7 W, Plug&Play + Anschlussbox	Article no.: 17663020
imensions: 110 mm x 50 mm x 19 mm tps://www.brumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf rticle no.: 17613000 ED converter 350 mA, on/off switchable ower: 1 - 15 W, Plug&Play imensions: 115 mm x 34 mm x 19 mm tps://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf rticle no.: 17613020 ED converter 350 mA, on/off switchable ower: 1 - 15 W, Plug&Play + Anschlussbox imensions: 115 mm x 34 mm x 19 mm tps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf rticle no.: 17621000 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play imensions: 128 mm x 50 mm x 13 mm tps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf rticle no.: 17621020 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm tps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf rticle no.: 17621020 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm tps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf rticle no.: 17652000 ED-converter 350 mA, trailing-edge phase dimmer ower: 4.9 - 7 W, Plug&Play imensions: 51 mm x 24 mm tps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf rticle no.: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4.9 - 7 W, Plug&Play + Anschlussbox	LED converter 350 mA, trailing-edge phase dimmable
<pre>ttps://www.brumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf tricle no.: 17613000 ED converter 350 mA, on/off switchable wer: 1-15 W, Plug&Play imensions: 115 mm x 34 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf tricle no.: 17613020 ED converter 350 mA, on/off switchable bower: 1-15 W, Plug&Play + Anschlussbox imensions: 115 mm x 34 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf tricle no.: 17613020 ED converter 350 mA, on/off switchable bower: 1-15 W, Plug&Play + Anschlussbox imensions: 115 mm x 34 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf tricle no.: 17621000 ED converter 350 mA, on/off switchable bower: 1-21 W, Plug&Play imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf tricle no.: 17621020 ED converter 350 mA, on/off switchable bower: 1-21 W, Plug&Play imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf tricle no.: 17621020 ED converter 350 mA, on/off switchable bower: 1-21 W, Plug&Play imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf tricle no.: 17652000 ED-converter 350 mA, trailing-edge phase dimmer bower: 4,9 - 7 W, Plug&Play imensions: 51 mm x 24 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf tricle no.: 17652002 ED-converter 350 mA, trailing-edge phase dimmer bower: 4,9 - 7 W, Plug&Play + Anschlussbox</pre>	Power: 2,8 - 7 W, Plug&Play + Anschlussbox
<pre>tricle no.: 17613000 ED converter 350 mA, on/off switchable ower: 1 - 15 W, Plug&Play imensions: 115 mm x 34 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf tricle no.: 17613020 ED converter 350 mA, on/off switchable ower: 1 - 15 W, Plug&Play + Anschlussbox imensions: 115 mm x 34 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf tricle no.: 17621000 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf tricle no.: 17621020 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf tricle no.: 17621020 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf tricle no.: 17652000 ED-conud converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play + Anschlussbox ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play + Anschlussbox</pre>	Dimensions: 110 mm x 50 mm x 19 mm
ED converter 350 mA, on/off switchable ower: 1 - 15 W, Plug&Play tricle no.: 176 13020 ED converter 350 mA, on/off switchable ower: 1 - 15 W, Plug&Play + Anschlussbox timensions: 115 mm x 34 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf rticle no.: 17621000 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play tricle no.: 17621020 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf rticle no.: 17621020 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play timensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf rticle no.: 17621020 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play + Anschlussbox timensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf rticle no.: 17652000 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4, 9 - 7 W, Plug&Play timensions: 51 mm x 24 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf rticle no.: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4, 9 - 7 W, Plug&Play + Anschlussbox	https://www.brumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf
ower: 1 - 15 W, Plug&Play imensions: 115 mm x 34 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf tricle no: 17613020 ED converter 350 mA, on/off switchable ower: 1 - 15 W, Plug&Play + Anschlussbox imensions: 115 mm x 34 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf tricle no: 17621000 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf tricle no:: 17621020 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf tricle no:: 17621020 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf tricle no:: 17652000 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4, 9 - 7 W, Plug&Play imensions: 51 mm x 24 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf tricle no:: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4, 9 - 7 W, Plug&Play + Anschlussbox	Article no.: 17613000
ower: 1 - 15 W, Plug&Play imensions: 115 mm x 34 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf tricle no: 17613020 ED converter 350 mA, on/off switchable ower: 1 - 15 W, Plug&Play + Anschlussbox imensions: 115 mm x 34 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf tricle no: 17621000 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf tricle no: 17621020 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf tricle no: 17621020 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf tricle no: 17652000 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4, 9 - 7 W, Plug&Play imensions: 51 mm x 24 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf tricle no: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4, 9 - 7 W, Plug&Play + Anschlussbox	LED converter 350 mA, on/off switchable
imensions: 115 m ⁻ x 3 ⁴ mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf tritcle no:: 17613020 ED converter 350 mA, on/off switchable ower: 1 - 15 W, Plug&Play + Anschlussbox imensions: 115 mm x 34 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf tritcle no:: 17621000 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf tritcle no:: 17621020 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf tritcle no:: 1762000 ED-converter 350 mA, trailing-edge phase dimmer ower: 4, 9 - 7 W, Plug&Play imensions: 51 mm x 24 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf tritcle no:: 17652020 ED-converter 350 mA, trailing-edge phase dimmer ower: 4, 9 - 7 W, Plug&Play imensions: 51 mm x 24 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf tritcle no:: 17652020 ED-converter 350 mA, trailing-edge phase dimmer ower: 4, 9 - 7 W, Plug&Play + Anschlussbox	Power: 1 - 15 W, Plug&Play
Tricle no.: 17613020 ED converter 350 mA, on/off switchable ower: 1 - 15 W, Plug&Play + Anschlussbox imensions: 115 mm x 34 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf tricle no.: 17621000 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf tricle no.: 17621020 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf tricle no.: 17652000 ED-converter 350 mA, trailing-edge phase dimmer ower: 4, 9 - 7 W, Plug&Play imensions: 51 mm x 24 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf tricle no.: 17652000 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4, 9 - 7 W, Plug&Play imensions: 51 mm x 24 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf tricle no.: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4, 9 - 7 W, Plug&Play imensions: 51 mm x 24 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf tricle no.: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4, 9 - 7 W, Plug&Play + Anschlussbox	Dimensions: 115 mm x 34 mm x 19 mm
Tricle no.: 17613020 ED converter 350 mA, on/off switchable ower: 1 - 15 W, Plug&Play + Anschlussbox imensions: 115 mm x 34 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf tricle no.: 17621000 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf tricle no.: 17621020 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf tricle no.: 17652000 ED-converter 350 mA, trailing-edge phase dimmer ower: 4, 9 - 7 W, Plug&Play imensions: 51 mm x 24 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf tricle no.: 17652000 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4, 9 - 7 W, Plug&Play imensions: 51 mm x 24 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf tricle no.: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4, 9 - 7 W, Plug&Play imensions: 51 mm x 24 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf tricle no.: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4, 9 - 7 W, Plug&Play + Anschlussbox	https://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf
ED converter 350 mA, on/off switchable ower: 1 - 15 W, Plug&Play + Anschlussbox imensions: 115 mm x 34 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf rticle no.: 17621000 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf rticle no.: 17621020 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf rticle no.: 17652000 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4, 9 - 7 W, Plug&Play timesions: 51 mm x 24 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf rticle no.: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4, 9 - 7 W, Plug&Play + Anschlussbox	Article no : 17613020
ower: 1 - 15 W, Plug&Play + Anschlussbox imensions: 115 mm x 34 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf tricle no.: 17621000 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf tricle no.: 17621020 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf tricle no.: 17652000 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4, 9 - 7 W, Plug&Play ttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf tricle no.: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4, 9 - 7 W, Plug&Play ttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf tricle no.: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4, 9 - 7 W, Plug&Play + Anschlussbox	
<pre>imensions: 115 mm x 34 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf rticle no.: 17621000 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf rticle no.: 17621020 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf rticle no.: 17621020 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf rticle no.: 17652000 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play imensions: 51 mm x 24 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf rticle no.: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play + Anschlussbox</pre>	
<pre>ttps://www.brumberg.com/fileadmin/products/Datenblatt 17613020_2021_DE.pdf tricle no.: 17621000 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf tricle no.: 17621020 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf tricle no.: 17621020 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf tricle no.: 17652000 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play + Anschlussbox ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play + Anschlussbox</pre>	
<pre>tricle no.: 17621000 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf rticle no.: 17621020 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf rticle no.: 17652000 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play imensions: 51 mm x 24 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf</pre>	
ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf rticle no.: 17621020 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf rticle no.: 17652000 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play imensions: 51 mm x 24 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf rticle no.: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play imensions: 51 mm x 24 mm	
ower: 1 - 21 W, Plug&Play imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf rticle no.: 17621020 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf rticle no.: 17652000 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play imensions: 51 mm x 24 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf rticle no.: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play imensions: 51 mm x 24 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf rticle no.: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play + Anschlussbox	
<pre>imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf rticle no.: 17621020 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf rticle no.: 17652000 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play imensions: 51 mm x 24 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf rticle no.: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play + Anschlussbox</pre>	
ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf rticle no.: 17621020 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf rticle no.: 17652000 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play imensions: 51 mm x 24 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf rticle no.: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play + Anschlussbox	
rticle no.: 17621020 ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf rticle no.: 17652000 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play imensions: 51 mm x 24 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf rticle no.: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play + Anschlussbox	
ED converter 350 mA, on/off switchable ower: 1 - 21 W, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf rticle no.: 17652000 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play imensions: 51 mm x 24 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf rticle no.: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play + Anschlussbox	
ower: 1 - 21 W, Plug&Play + Anschlussbox imensions: 128 mm x 50 mm x 13 mm <u>ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf</u> rticle no.: 17652000 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play imensions: 51 mm x 24 mm <u>ttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf</u> rticle no.: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play + Anschlussbox	
imensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf rticle no.: 17652000 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play imensions: 51 mm x 24 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf rticle no.: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play + Anschlussbox	
ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf rticle no.: 17652000 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play imensions: 51 mm x 24 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf rticle no.: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play + Anschlussbox	
rticle no.: 17652000 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play imensions: 51 mm x 24 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf rticle no.: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play + Anschlussbox	
ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play imensions: 51 mm x 24 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf rticle no.: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play + Anschlussbox	
ower: 4,9 - 7 W, Plug&Play imensions: 51 mm x 24 mm <u>ttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf</u> rticle no.: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play + Anschlussbox	
imensions: 51 mm x 24 mm <u>ttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf</u> rticle no.: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer pwer: 4,9 - 7 W, Plug&Play + Anschlussbox	
t <u>tps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf</u> rticle no.: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play + Anschlussbox	
rticle no.: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play + Anschlussbox	
ED-round converter 350 mA, trailing-edge phase dimmer ower: 4,9 - 7 W, Plug&Play + Anschlussbox	
ower: 4,9 - 7 W, Plug&Play + Anschlussbox	Article no.: 17652020
	LED-round converter 350 mA, trailing-edge phase dimmer
improjence: 51 mm x 24 mm	Power: 4,9 - 7 W, Plug&Play + Anschlussbox
	Dimensions: 51 mm x 24 mm
<u>tps://www.brumberg.com/fileadmin/products/Datenblatt_17652020_2021_DE.pdf</u>	https://www.brumberg.com/fileadmin/products/Datenblatt_17652020_2021_DE.pdf

Article no. 12361253

Required accessories
Article no.: 17640000
LED converter 350 mA, trailing-edge phase dimmable
Power: 4,2 - 10 W, Plug&Play
Dimensions: 102 mm x 38 mm x 21 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17640000_2021_DE.pdf
Article no.: 17640020
LED converter 350 mA, trailing-edge phase dimmable
Power: 4,2 - 10 W, Plug&Play + Anschlussbox
Dimensions: 102 mm x 38 mm x 21 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17640020_2021_DE.pdf
Article no.: 17648000
LED converter 350 mA, trailing-edge phase dimmable
Power: 0,7 - 17 W, Plug&Play Dimensions: 166 mm x 46 mm x 34 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17648000_2021_DE.pdf
Article no.: 17648020
LED converter 350 mA, trailing-edge phase dimmable
Power: 0,7 - 17 W, Plug&Play + Anschlussbox
Dimensions: 166 mm x 46 mm x 34 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17648020_2021_DE.pdf
Article no.: 17657000
LED converter 350 mA, 1-10 V dimmable (analog)
Power: 5,2 - 18 W, Plug&Play
Dimensions: 110 mm x 52 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17657000_2021_DE.pdf
Article no.: 17682000
LED converter 350 mA, DALI dimmable (digital)
Power: 1,8 - 18,5 W, Plug&Play
Dimensions: 146.5 mm x 43.5 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17682000_2021_DE.pdf
Article no.: 17682020
LED converter 350 mA, DALI dimmable (digital)
Power: 1,8 - 18,5 W, Plug&Play + Anschlussbox
Dimensions: 146.5 mm x 43.5 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17682020_2021_DE.pdf
Article no.: 17683000
LED converter 350 mA, DALI dimmable (digital)
Power: 3,5 - 17 W, Plug&Play
Dimensions: 110.5 mm x 52 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17683000_2021_DE.pdf
Article no.: 17683020
LED converter 350 mA, DALI dimmable (digital)
Power: 3,5 - 17 W, Plug&Play + Anschlussbox
Dimensions: 110.5 mm x 52 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17683020_2021_DE.pdf
Article no.: 17684000
LED converter 350 mA, DALI dimmable (digital)
Power: 2,8 - 7 W, Plug&Play
Dimensions: 130 mm x 42 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17684000_2021_DE.pdf

BRUMBERG

Light. Since 1873.

BRUMBERG Light. Since 1873.

SEVEN-R LED-Einbaustrahler

Article no. 12361253

Article no.: 17684020 ED converter 350 mA, DALI dimmable (digital) Power: 2,8 - 7 W, Plug&Play + Anschlussbox Dimensions: 130 mm x 4 2 mm x 22 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17684020_2021_DE.pdf Article no.: 17658000 ED round converter 350 mA, DALI dimmable (digital) Power: 2,1 - 9 W, Plug&Play Dimensions: 56 mm x 25 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17658000_2021_DE.pdf Article no.: 17658020 ED round converter 350 mA, DALI dimmable (digital) Power: 2,1 - 9 W, Plug&Play + Anschlussbox Dimensions: 56 mm x 25 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17658020_2021_DE.pdf Article no.: 17671000 ED converter 350 mA, ZigBee dimmable Power: 3,5 - 18,5 W, Plug&Play Dimensions: 14.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf Article no.: 17671020 ED converter 350mA, ZigBee dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox Dimensions: 14.6 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf Article no.: 17672000 ED converter 350mA, Cagaenbi dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox Dimensions: 14.6.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf Article no.: 17672000 ED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox Dimensions: 14.6.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf Article no.: 17672000 ED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play Dimensions: 14.6.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf	Required accessories
EED converter 350 mA, DALI dimmable (digital) Power: 2, 8 - 7 W, Plug&Play + Anschlussbox Dimensions: 130 mm x 42 mm x 22 mm tttise: //www.brumberg.com/fileadmin/products/Datenblatt_17684020_2021_DE.pdf Article no:: 17658000 ED round converter 350 mA, DALI dimmable (digital) Power: 2, 1 - 9 W, Plug&Play Dimensions:: 56 mm x 25 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17658000_2021_DE.pdf Article no:: 17658020 ED round converter 350 mA, DALI dimmable (digital) Power: 2, 1 - 9 W, Plug&Play + Anschlussbox Dimensions: 56 mm x 25 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17658020_2021_DE.pdf Article no:: 17671000 ED converter 350mA, ZigBee dimmable Power: 3, 1 - 8, 5, W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf Article no:: 17671020 ED converter 350mA, ZigBee dimmable Power: 3, 5 - 18,5 W, Plug&Play + Anschlussbox Dimensions: 146.5 mm x 44 mm x 30 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf Article no:: 17672000 ED converter 350mA, ZigBee dimmable Power: 3, 5 - 18,5 W, Plug&P	
Power: 2,8 - 7 W, Plug&Play + Anschlussbox Dimensions: 130 mm x 42 mm x 22 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17684020_2021_DE.pdf Article no:: 17658000 ED round converter 350 mA, DALI dimmable (digital) Power: 2,1 - 9 W, Plug&Play Dimensions: 56 mm x 25 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17658000_2021_DE.pdf Article no:: 17658020 ED round converter 350 mA, DALI dimmable (digital) Power: 2,1 - 9 W, Plug&Play + Anschlussbox Dimensions: 56 mm x 25 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17658020_2021_DE.pdf Article no:: 17671000 ED converter 350mA, ZigBee dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox Dimensions: 56 mm x 25 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17671000_2021_DE.pdf Article no:: 17671020 ED converter 350mA, ZigBee dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox Dimensions: 146.5 mm x 44 mm x 30 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17671000_2021_DE.pdf Article no:: 17671020 ED converter 350mA, ZigBee dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox Dimensions: 146.5 mm x 44 mm x 30 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf Article no:: 17672000 ED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf Article no:: 17622020 ED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf Article no:: 17622020 ED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm	
Dimensions: 130 mn x 42 mm x 22 mm tttps://www.brumberg.com/fileadmin/products/Datenblatt_17684020_2021_DE.pdf Article no:: 17658000 ED round converter 350 mA, DALI dimmable (digital) Power: 2,1 - 9 W, Plug&Play Dimensions: 56 mm x 25 mm tttps://www.brumberg.com/fileadmin/products/Datenblatt_17658000_2021_DE.pdf Article no:: 17658020 ED round converter 350 mA, DALI dimmable (digital) Power: 2,1 - 9 W, Plug&Play + Anschlussbox Dimensions: 56 mm x 25 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17658020_2021_DE.pdf Article no:: 17671000 ED converter 350mA, ZigBee dimmable Power: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671000_2021_DE.pdf Article no:: 17671020 ED converter 350mA, ZigBee dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf Article no:: 17672000 ED converter 350mA, ZigBee dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf Article no:: 17672000 ED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf Article no:: 17672020 ED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox	
https://www.brumberg.com/fileadmin/products/Datenblatt_17684020_2021_DE.pdf Article no.: 17658000 LED round converter 350 mA, DALI dimmable (digital) Ower: 2,1 - 9 W, Plug&Play Dimensions: 56 mm x 25 mm Lttps://www.brumberg.com/fileadmin/products/Datenblatt_17658000_2021_DE.pdf Article no.: 17658020 LED round converter 350 mA, DALI dimmable (digital) Ower: 2,1 - 9 W, Plug&Play + Anschlussbox Dimensions: 56 mm x 25 mm Lttps://www.brumberg.com/fileadmin/products/Datenblatt_17658020_2021_DE.pdf Article no.: 17671000 LED converter 350mA, ZigBee dimmable Ower: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm Lttps://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf Article no.: 17671020 LED converter 350mA, ZigBee dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox Dimensions: 146.5 mm x 44 mm x 30 mm Lttps://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf Article no.: 17672000 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox Dimensions: 146.5 mm x 44 mm x 30 mm Lttps://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf Article no.: 17672020 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox Dimensions: 146.5 mm x 44 mm x 30 mm Lttps://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf Article no.: 17672020 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox Dimensions: 146.5 mm x 44 mm x 30 mm Lttps://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf Article no.: 17672020 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox Dimensions: 146.5 mm x 44 mm x 30 mm Lttps://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf Article no.: 17672020 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox Dimensions: 146.5 mm x 44 mm x 30 mm Lttps://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf Article no.: 17672020 LED converte	
Article no.: 17658000 LED round converter 350 mA, DALI dimmable (digital) Power: 2,1 - 9 W, Plug&Play Dimensions: 56 mm x 25 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17658000_2021_DE.pdf Article no.: 17658020 LED round converter 350 mA, DALI dimmable (digital) Power: 2,1 - 9 W, Plug&Play + Anschlussbox Dimensions: 56 mm x 25 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17658020_2021_DE.pdf Article no.: 17671000 LED converter 350mA, ZigBee dimmable Power: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671000_2021_DE.pdf Article no.: 17671020 LED converter 350mA, ZigBee dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf Article no.: 17672000 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf Article no.: 17672000 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf Article no.: 17672020 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf Article no.: 17672020 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox	
LED round converter 350 mA, DALI dimmable (digital) Power: 2, 1 - 9 W, Plug&Play Dimensions: 56 mm x 25 mm titps://www.brumberg.com/fileadmin/products/Datenblatt_17658000_2021_DE.pdf Article no: 17658020 LED round converter 350 mA, DALI dimmable (digital) Power: 3, 1 - 9 W, Plug&Play + Anschlussbox Dimensions: 56 mm x 25 mm titps://www.brumberg.com/fileadmin/products/Datenblatt_17658020_2021_DE.pdf Article no:: 17671000 LED converter 350mA, ZigBee dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671000_2021_DE.pdf Article no:: 17671020 LED converter 350mA, ZigBee dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf Article no:: 17672000 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf Article no:: 17672000 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf Article no:: 17672020 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox	
Power: 2, 1 - 9 W, Plug&Play Dimensions: 56 mm x 25 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17658000_2021_DE.pdf Article no.: 17658020 LED round converter 350 mA, DALI dimmable (digital) Power: 2, 1 - 9 W, Plug&Play + Anschlussbox Dimensions: 56 mm x 25 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17658020_2021_DE.pdf Article no.: 17671000 LED converter 350mA, ZigBee dimmable Power: 3, 5 - 18, 5 W, Plug&Play + Anschlussbox Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671000_2021_DE.pdf Article no.: 17671020 LED converter 350mA, ZigBee dimmable Power: 3, 5 - 18, 5 W, Plug&Play + Anschlussbox Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf Article no.: 17672000 LED converter 350mA, Casambi dimmable Power: 3, 5 - 18, 5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf Article no.: 17672000 LED converter 350mA, Casambi dimmable Power: 3, 5 - 18, 5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf Article no.: 17672020 LED converter 350mA, Casambi dimmable Power: 3, 5 - 18, 5 W, Plug&Play + Anschlussbox	
Dimensions: 56 mm x 25 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17658000_2021_DE.pdf Article no.: 17658020 LED round converter 350 mA, DALI dimmable (digital) Power: 2,1 - 9 W, Plug&Play + Anschlussbox Dimensions: 56 mm x 25 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17658020_2021_DE.pdf Article no.: 17671000 LED converter 350mA, ZigBee dimmable Power: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671000_2021_DE.pdf Article no.: 17671020 LED converter 350mA, ZigBee dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf Article no.: 17671020 LED converter 350mA, ZigBee dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf Article no.: 17672000 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf Article no.: 17672020 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf Article no.: 17672020 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox	
Article no.: 17658020 LED round converter 350 mA, DALI dimmable (digital) Power: 2, 1 - 9 W, Plug&Play + Anschlussbox Dimensions: 56 mm x 25 mm tttps://www.brumberg.com/fileadmin/products/Datenblatt_17658020_2021_DE.pdf Article no.: 17671000 LED converter 350mA, ZigBee dimmable Power: 3, 5 - 18, 5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm nttps://www.brumberg.com/fileadmin/products/Datenblatt_17671000_2021_DE.pdf Article no.: 17671020 LED converter 350mA, ZigBee dimmable Power: 3, 5 - 18, 5 W, Plug&Play + Anschlussbox Dimensions: 146.5 mm x 44 mm x 30 mm nttps://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf Article no.: 17672000 LED converter 350mA, Casambi dimmable Power: 3, 5 - 18, 5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm nttps://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf Article no.: 17672000 LED converter 350mA, Casambi dimmable Power: 3, 5 - 18, 5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm nttps://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf Article no.: 17672020 LED converter 350mA, Casambi dimmable Power: 3, 5 - 18, 5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm nttps://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf Article no.: 17672020 LED converter 350mA, Casambi dimmable Power: 3, 5 - 18, 5 W, Plug&Play + Anschlussbox	Dimensions: 56 mm x 25 mm
LED round converter 350 mA, DALI dimmable (digital) Power: 2, 1 - 9 W, Plug&Play + Anschlussbox Dimensions: 56 mm x 25 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17658020_2021_DE.pdf Article no.: 17671000 LED converter 350mA, ZigBee dimmable Power: 3, 5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671000_2021_DE.pdf Article no.: 17671020 LED converter 350mA, ZigBee dimmable Power: 3, 5 - 18,5 W, Plug&Play + Anschlussbox Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf Article no.: 17672000 LED converter 350mA, Casambi dimmable Power: 3, 5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf Article no.: 17672000 LED converter 350mA, Casambi dimmable Power: 3, 5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf Article no.: 17672020 LED converter 350mA, Casambi dimmable Power: 3, 5 - 18,5 W, Plug&Play + Anschlussbox	https://www.brumberg.com/fileadmin/products/Datenblatt_17658000_2021_DE.pdf
Power: 2,1 - 9 W, Plug&Play + Anschlussbox Dimensions: 56 mm x 25 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17658020_2021_DE.pdf Article no.: 17671000 LED converter 350mA, ZigBee dimmable Power: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671000_2021_DE.pdf Article no.: 17671020 LED converter 350mA, ZigBee dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf Article no.: 17672000 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf Article no.: 17672000 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf Article no.: 17672020 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox	Article no.: 17658020
Power: 2,1 - 9 W, Plug&Play + Anschlussbox Dimensions: 56 mm x 25 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17658020_2021_DE.pdf Article no.: 17671000 LED converter 350mA, ZigBee dimmable Power: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671000_2021_DE.pdf Article no.: 17671020 LED converter 350mA, ZigBee dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf Article no.: 17672000 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf Article no.: 17672000 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf Article no.: 17672020 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox	LED round converter 350 mA, DALI dimmable (digital)
https://www.brumberg.com/fileadmin/products/Datenblatt_17658020_2021_DE.pdf Article no.: 17671000 LED converter 350mA, ZigBee dimmable Power: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671000_2021_DE.pdf Article no.: 17671020 LED converter 350mA, ZigBee dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf Article no.: 17672000 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf Article no.: 17672020 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf Article no.: 17672020 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox	Power: 2,1 - 9 W, Plug&Play + Anschlussbox
Article no.: 17671000 LED converter 350mA, ZigBee dimmable Power: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671000_2021_DE.pdf Article no.: 17671020 LED converter 350mA, ZigBee dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf Article no.: 17672000 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf Article no.: 1767200 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf Article no.: 17672020 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox	Dimensions: 56 mm x 25 mm
LED converter 350mA, ZigBee dimmable Power: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671000_2021_DE.pdf Article no.: 17671020 LED converter 350mA, ZigBee dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf Article no.: 17672000 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf Article no.: 17672000 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf Article no.: 17672020 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox	https://www.brumberg.com/fileadmin/products/Datenblatt_17658020_2021_DE.pdf
Power: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671000_2021_DE.pdf Article no.: 17671020 LED converter 350mA, ZigBee dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf Article no.: 17672000 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf Article no.: 17672000 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf Article no.: 17672020 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox	Article no.: 17671000
Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671000_2021_DE.pdf Article no.: 17671020 LED converter 350mA, ZigBee dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf Article no.: 17672000 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf Article no.: 17672020 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox	LED converter 350mA, ZigBee dimmable
https://www.brumberg.com/fileadmin/products/Datenblatt_17671000_2021_DE.pdf Article no.: 17671020 LED converter 350mA, ZigBee dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf Article no.: 17672000 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf Article no.: 17672020 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox	Power: 3,5 - 18,5 W, Plug&Play
Article no.: 17671020 LED converter 350mA, ZigBee dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf Article no.: 17672000 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf Article no.: 17672020 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox	Dimensions: 146.5 mm x 44 mm x 30 mm
LED converter 350mA, ZigBee dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf Article no.: 17672000 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf Article no.: 17672020 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox	https://www.brumberg.com/fileadmin/products/Datenblatt_17671000_2021_DE.pdf
Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf Article no.: 17672000 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf Article no.: 17672020 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox	Article no.: 17671020
Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf Article no.: 17672000 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf Article no.: 17672020 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox	LED converter 350mA, ZigBee dimmable
https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf Article no.: 17672000 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf Article no.: 17672020 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox	
Article no.: 17672000 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm <u>https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf</u> Article no.: 17672020 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox	
LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf Article no.: 17672020 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox	https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf
Power: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm <u>https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf</u> Article no.: 17672020 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox	Article no.: 17672000
Dimensions: 146.5 mm x 44 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf Article no.: 17672020 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox	,
https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf Article no.: 17672020 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox	
Article no.: 17672020 LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox	
LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox	https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf
Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox	Article no.: 17672020
Dimensions: 146.5 mm x 44 mm x 30 mm	
https://www.brumberg.com/fileadmin/products/Datenblatt_1/6/2020_2021_DE.pdf	https://www.brumberg.com/fileadmin/products/Datenblatt_17672020_2021_DE.pdf

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 19.05.2025 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/



Article no. 12361253

Optional accessories
Article no.: 81201250
Reducing ring D 110 mm, for luminaire cut-out size 68 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_81201250_2021_DE.pdf
Article no.: 81202250
Reducing ring D 130 mm, for luminaire cut-out size 68 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_81202250_2021_DE.pdf
Article no.: 81203250
Reducing ring D 145 mm, for luminaire cut-out size 68 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_81203250_2021_DE.pdf
Article no.: 3835
Plug & Play extension lead 350 mA
Dimensions: 500 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_00003835_2021_DE.pdf
Article no.: 3836
Plug & Play extension lead 350 mA
Dimensions: 1,000 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_00003836_2021_DE.pdf
Article no.: 3837
Plug & Play extension lead 350 mA
Dimensions: 2,000 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_00003837_2021_DE.pdf