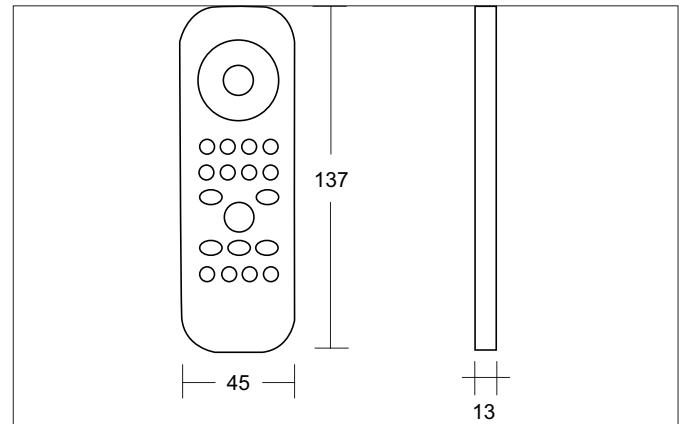


ZigBee LED radio remote control for 18 157000

Article no. 18207000

Light.
For Generations.**Tender**

ZigBee LED radio remote control for 18 157000. ZigBee LED radio controller for the ZigBee LED dimmer 18 157000. Enables the coupling of ZigBee lighting devices through Touchlink commissioning. Supports search and binding mode for coupling with the ZigBee lighting devices. Enables binding and controlling of universal DIM-, CCT-, RGB-, RGBW- and RGB + CCT ZigBee lighting devices. Transmission range (visual contact): up to 30 m. Up to four groups (maximum 30 receivers) can be controlled independently using one remote control. Seven individual colors and brightness values can be saved and called. Six preset scenes and five color temperatures can be called. The RGB color saturation can be adjusted. Voltage (battery): 6 V DC - 2 x CR2032 (not included in the scope of delivery), Frequency: 2.4 GHz, transmission power (Ps) < 100 mW, protocol: ZigBee 3.0, (Dimensions: L 137 x W 45 x H 13 mm, material: plastic Degree of protection: according to DIN EN 60529 IP20, .

Article data	
Article no.	18207000
GTIN	4251433927402
Short description	ZigBee LED radio remote control for 18 157000
Material	Plastic
Length	137 mm
Width	45 mm
Height	13 mm
Weight	0.049 kg

ZigBee LED radio remote control for 18 157000

Article no. 18207000

Light.
For Generations.

Packing data	
Gross weight	0.079 kg
Length of packaging	60 mm
Packaging width	27 mm
Packaging height	150 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>