
Article no. 12383173



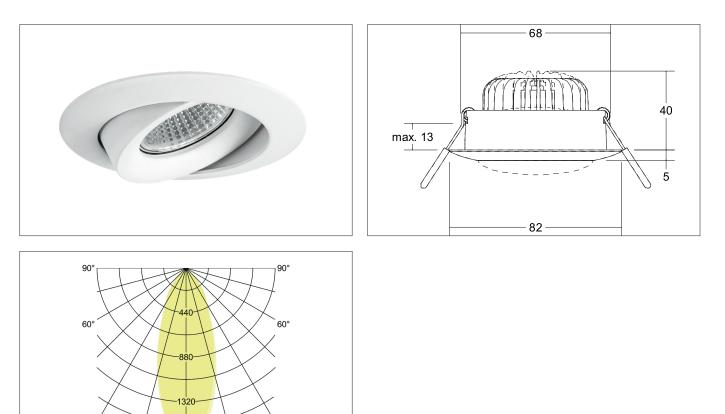

30

#### Tender

Round LED recessed spotlight, tool-free ceiling installation using installation springs. Ceiling cut-out Ø 68 mm, installation depth 40 mm, outer diameter 82 mm, weight 0.146 kg, silver reflector with rotationally symmetrical deep-wide beam light distribution. Transparent plastic cover, rated luminous flux 600 lm, rated wattage 1 x 7 W, warm white light color, most similar color temperature (CCT) 3,000 K, general co-lor rendering index CRI > 80, housing material: aluminum / polycarbonate, color: textured white, permissible ambient temperature (ta): -20 °C - +25 °C, protection class (EN 61140): III, degree of protection (DIN EN 60529): IP20. For connection to an external control gear, which is not included with the luminaire. Dimmable depending on the control gear.

#### **Product Benefits**

• Recessed downlight in round design made of solid aluminum.

-1760cd.klm

• Ceiling cutout 68 mm, outer diameter 82 mm, recess depth 40 mm, luminous flux 600 lm, IP20.

309

- Dimmable when using a suitable converter.
- In the same surface structure and colors also available recessed rigid.



Article no. 12383173

Article data	
Article no.	12383173
GTIN	4251433925507
Series name	CELINDA-R
Short description	LED recessed spot
Material	Aluminium / Polycarbonate
Colour	White
Type of surface	Structure
Shape	Round
Outer diameter	82 mm
Built-in diameter	68 mm
Installation depth	40 mm
Hight	5 mm
Weight	0.146 kg
Conformance	CE, UKCA

Lighting technology	
Colour temperature	3.000 K
Light colour	White
Light output	Direct
Luminous flux	600 lm
System efficiency	86 lm/W
Colour rendering	CRI > 80
Reflector	Faceted
Reflector colour	silver
Beam angle	40°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
Voltage type	DC
Current	350 mA
Lamp	LED
Lamp holder	Plug&Play
Protection class	
Degree of protection	IP20
Dimmable	Depending on type of control gear
Control	Depending on driver
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service
	technician commissioned by him or a similarly qualified person.
Energy efficiency class	nicht erforderlich

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Pivoted
Swivel angle	30°
Max. ceiling thickness	13 mm
Further references	No cover with thermal insulation material
Material cover	Plastic, transparent
Suitable for through-wiring	Yes, with optional accessories

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 10.04.2025 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/

Packing data	
Gross weight	0.19 kg
Length of packaging	115 mm
Packaging width	85 mm
Packaging hight	65 mm
	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.
Disposal at end of life	By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.

Article no. 12383173

<ul> <li>viriele no: 17662000</li> <li>Eb converter 350 mA, on/off switchable</li> <li>Sower: 1 - 7, 2, W, Plug&amp;Play</li> <li>Timesions: 86 mm x 55 mm x 21 mm</li> <li>tites://www.thumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf</li> <li>Viriele no: 17662020</li> <li>Eb converter 350 mA, trailing-edge phase dimmable</li> <li>Sower: 1 - 7, 2, W, Plug&amp;Play</li> <li>Dimensions: 68 mm x 35 mm x 21 mm</li> <li>tites://www.thumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf</li> <li>Viriele no: 17663000</li> <li>Eb converter 350 mA, trailing-edge phase dimmable</li> <li>Sower: 28 - 7, W, Plug&amp;Play</li> <li>Dimensions: 61 mm x 50 mm x 19 mm</li> <li>tites://www.thumberg.com/fileadmin/products/Datenblatt_17663000_2021_DE.pdf</li> <li>Viriele no: 17663000</li> <li>ED converter 350 mA, trailing-edge phase dimmable</li> <li>Sower: 28 - 7, W, Plug&amp;Play</li> <li>Dimensions: 110 mm x 50 mm x 19 mm</li> <li>tites://www.thumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf</li> <li>Viriele no: 1763000</li> <li>ED converter 350 mA, on/off switchable</li> <li>Sower: 13 - 7, NJ Plug&amp;Play</li> <li>Dimensions: 110 mm x 50 mm x 19 mm</li> <li>tites://www.thumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf</li> <li>Viriele no: 17613000</li> <li>ED converter 350 mA, on/off switchable</li> <li>Sower: 1 - 15 W, Plug&amp;Play + Anschlussbox</li> <li>Dimensions: 115 mm x 44 mm x 19 mm</li> <li>tites://www.thumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf</li> <li>Viriele no: 17613020</li> <li>ED converter 350 mA, on/off switchable</li> <li>Sower: 1 - 15 W, Plug&amp;Play</li> <li>Dimensions: 115 mm x 44 mm x 19 mm</li> <li>tites://www.thumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf</li> <li>Viriele no: 17621000</li> <li>ED converter 350 mA, on/off switchable</li> <li>Sower: 1 - 15 W, Plug&amp;Play</li> <li>Dimensions: 115 mm x 44 mm x 19 mm</li> <li>tites://www.thumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf</li> <li>Viriele no: 17621000</li> <li>ED converte</li></ul>	Required accessories
ED converter 350 mA, on / off switchable >Dimensions: 66 mm x 35 mm x 21 mm titps://www.brumberg.com/fileadmin/products/Datenblatt_17662000_2021_DE.pdf >Virticle no: 17662020 ED converter 350 mA, on / off switchable >wer: 1-7.2W, Plug&Play + Anschlussbox >Dimensions: 68 mm x 35 mm x 21 mm titps://www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf Article no: 17663000 ED converter 350 mA, trailing-edge phase dimmable >wer: 2,8 - 7W, Plug&Play >Minesions: 10 mm x 50 mm x 19 mm titps://www.brumberg.com/fileadmin/products/Datenblatt_17663000_2021_DE.pdf Article no: 17663020 ED converter 350 mA, trailing-edge phase dimmable >wer: 2,8 - 7W, Plug&Play >Minesions: 10 mm x 50 mm x 19 mm titps://www.brumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf Article no: 1761300 ED converter 350 mA, trailing-edge phase dimmable >wer: 2,8 - 7W, Plug&Play >Intensions: 110 mm x 50 mm x 19 mm titps://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf Article no: 1761300 ED converter 350 mA, or/off switchable >wer: 1 - 15 W, Plug&Play >Intensions: 115 mm x 34 mm x 19 mm titps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf Article no: 17613020 ED converter 350 mA, or/off switchable >wer: 1 - 15 W, Plug&Play + Anschlusbox >mensions: 115 mm x 34 mm x 19 mm titps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf Article no: 17621000 ED converter 350 mA, or/off switchable >wer: 1 - 21 W, Plug&Play + Anschlusbox >mensions: 115 mm x 34 mm x 19 mm titps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf Article no: 17621000 ED converter 350 mA, or/off switchable >wer: 1 - 21 W, Plug&Play + Anschlusbox >mensions: 115 mm x 34 mm x 19 mm titps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Article no: 17621020 ED converter 350 mA, or/off switchable >wer: 1 - 21 W, Plug&Play + Anschlusbox >mensions: 115 mm x 34 mm x 13 mm titps://www.brumberg.com/fileadmin/products/Datenb	
Dover: 1 - 7.2 W. Plug&Play           Dimensions: 68 mm x 35 mm x 21 mm           titus: //www.brumberg.com/fileadmin/products/Datenblatt_17662000_2021_DE.pdf           Virtice no: 17662020           Dimensions: 68 mm x 35 mm x 21 mm           titus: //www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf           Tricle no: 17663000           ED converter 350 mM, onling-edge phase dimmable           Dimensions: 68 mm x 35 mm x 21 mm           titus: //www.brumberg.com/fileadmin/products/Datenblatt_17663000_2021_DE.pdf           Virtice no: 17663000           ED converter 350 mM, onling-edge phase dimmable           Dimensions: 110 mm x 50 mm x 19 mm           titus: //www.brumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf           Virtice no: 17613000           ED converter 350 mM, on/off switchable           Ower: 1, 35 W, Plug&Play           Dimensions: 110 mm x 50 mm x 19 mm           titus: //www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf           Virtice no: 17613000           ED converter 350 mA, on/off switchable           Ower: 1 - 15 W, Plug&Play           Dimensions: 115 mm x34 mm x 19 mm           titus: //www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf           Virtice no: 1763020           ED converter 350 mA, on/off switchable           Owe	
Dimensions: 68 mm x 35 mm x 21 mm tips://www.humberg.com/fileadmin/products/Datenblatt_17662000_2021_DE.pdf Article no: 17662020 ED converter 350 mA, on/off switchable Sover: 1 - 7 2, W. Plug&Play + Anschlussbox Dimensions: 68 mm x 35 mm x 21 mm tips://www.humberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf Article no: 17663020 ED converter 350 mA, trailing-edge phase dimmable Sover: 2,8 - 7 W, Plug&Play + Anschlussbox Dimensions: 10 mm x 50 mm x 19 mm tips://www.humberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf Article no: 17663020 ED converter 350 mA, trailing-edge phase dimmable Sover: 2,8 - 7 W, Plug&Play + Anschlusbox Dimensions: 110 mm x 50 mm x 19 mm tips://www.humberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf Article no: 17613000 ED converter 350 mA, or off switchable Sover: 1 - 15 W, Plug&Play + Anschlusbox Dimensions: 110 mm x 19 mm titps://www.humberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf Article no: 1761300 ED converter 350 mA, on/off switchable Sover: 1 - 15 W, Plug&Play + Anschlusbox Dimensions: 115 mm x 34 mm x 19 mm titps://www.humberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf Article no: 17613020 ED converter 350 mA, on/off switchable Sover: 1 - 15 W, Plug&Play + Anschlusbox Dimensions: 115 mm x 34 mm x 19 mm titps://www.humberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf Article no: 1761200 ED converter 350 mA, on/off switchable Sover: 1 - 15 W, Plug&Play + Anschlusbox Dimensions: 128 mm x 50 mm x 13 mm titps://www.humberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf Article no: 17621000 ED converter 350 mA, on/off switchable Sover: 4 - 7 W, Plug&Play + Anschlusbox Dimensions: 128 mm x 50 mm x 13 mm titps://www.humberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf Article no: 17652000 ED-converter 350 mA, on/off switchable Sover: 4 - 7 W, Plug&Play + Anschlusbox Dimensions: 128 mm x 50 mm, railing-edge phase dimmer Sover: 4 - 7 V, Plug&Play + Anschlusbo	
<pre>ittps://www.brumberg.com/fileadmin/products/Datenblatt_17662000_2021_DE.pdf Vtride no: 17662020 ED converter 350 mA, on/of switchable Ower: 1-7.2 W, Plug&amp;Play + Anschlusbox Dimensione: 80 mm x 35 mm x 21 mm Dimensione: 80 mm x 35 mm x 21 mm Dimensione: 80 mm x 35 mm x 21 mm Dimensione: 80 mm x 35 mm x 21 mm Dimensione: 80 mm x 35 mm x 21 mm Dimensione: 80 mm x 35 mm x 21 mm Dimensione: 80 mm x 19 mm Dimensione: 80 mm x 19 mm Dimensione: 80 mm x 19 mm Dimensione: 81 mm x 9 mm Dimensione: 81 mm x 90 mm x 19 mm Dimensione: 81 mm x 90 mm x 19 mm Dimensione: 81 mm x 90 mm x 19 mm Dimensione: 81 mm x 90 mm x 19 mm Dimensione: 81 mm x 90 mm x 19 mm Dimensione: 81 mm x 90 mm x 19 mm Dimensione: 81 mm x 90 mm Dimensione: 81 mm x 90 mm Dimensione: 81 mm x 90 mm Dime</pre>	
Article no: 17642020 ED converter 350 mA, on/off switchable Over: 1 - 7, 2W, Plug&Play + Anschlussbox Dimensions: 68 mm x 35 mm x 21 mm ttps://www.humberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf Article no: 17663000 ED converter 350 mA, trailing-edge phase dimmable Over: 2.8 - 7 W, Plug&Play Dimensions: 110 mm x 50 mm x 19 mm ttps://www.humberg.com/fileadmin/products/Datenblatt_17663000_2021_DE.pdf Article no: 17663020 ED converter 350 mA, trailing-edge phase dimmable Over: 2.8 - 7 W, Plug&Play + Anschlussbox Dimensions: 110 mm x 50 mm x 19 mm ttps://www.humberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf Article no: 17613000 ED converter 350 mA, nor/off switchable Over: 1 - 15 W, Plug&Play + Anschlussbox Dimensions: 115 mm x 34 mm x 19 mm ttps://www.humberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf Article no: 17613020 ED converter 350 mA, on/off switchable Over: 1 - 15 W, Plug&Play + Anschlussbox Dimensions: 115 mm x 34 mm x 19 mm ttps://www.humberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf Article no: 17613020 ED converter 350 mA, on/off switchable Over: 1 - 15 W, Plug&Play + Anschlussbox Dimensions: 115 mm x 34 mm x 19 mm ttps://www.humberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf Article no: 17621000 ED converter 350 mA, on/off switchable Over: 1 - 12 Mm x 50 mm x 13 mm ttps://www.humberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf Article no: 1762100 ED converter 350 mA, on/off switchable Over: 1 - 21 W, Plug&Play + Anschlussbox Dimensions: 128 mm x 50 mm x 13 mm ttps://www.humberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Article no: 1762100 ED converter 350 mA, no/off switchable Over: 4 - 7 W, Plug&Play Dimensions: 128 mm x 50 mm x 13 mm ttps://www.humberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Article no: 1765200 ED-converter 350 mA, no/off switchable Dimensions: 51 mm x 24 mm ttps://www.humberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf A	
ED converter 350 mA, on/off switchable Power: 1 - 7, 2 W, Plug&Play + Anschlussbox Dimensions: 68 om x 35 mm x 21 mm titps://www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf Article no: 17663000 ED converter 350 mA, trailing-edge phase dimmable Power: 2, 8 - 7 W, Plug&Play Dimensions: 110 mm x 50 mm x 19 mm titps://www.brumberg.com/fileadmin/products/Datenblatt_17663000_2021_DE.pdf Article no: 1766300 ED converter 350 mA, trailing-edge phase dimmable Power: 2, 8 - 7 W, Plug&Play + Anschlussbox Dimensions: 110 mm x 50 mm x 19 mm titps://www.brumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf Article no: 1761300 ED converter 350 mA, or/off switchable Power: 1 - 15 W, Plug&Play + Anschlussbox Dimensions: 115 mm x 34 mm x 19 mm titps://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf Article no:: 17613020 ED converter 350 mA, or/off switchable Power: 1 - 15 W, Plug&Play + Anschlussbox Dimensions: 115 mm x 34 mm x 19 mm titps://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf Article no:: 17613020 ED converter 350 mA, or/off switchable Power: 1 - 15 W, Plug&Play + Anschlussbox Dimensions: 115 mm x 34 mm x 19 mm titps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf Article no:: 1762100 ED converter 350 mA, or/off switchable Power: 1 - 21 W, Plug&Play + Anschlussbox Dimensions: 128 mm x 50 mm x 13 mm titps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf Article no:: 1762100 ED converter 350 mA, or/off switchable Power: 1 - 21 W, Plug&Play + Anschlussbox Dimensions: 128 mm x 50 mm x 13 mm titps://www.brumberg.com/fileadmin/products/Datenblatt_1762100_2021_DE.pdf Article no:: 17652000 ED-round converter 350 mA, trailing-edge phase dimmer Power: 4 - 7 W, Plug&Play + Anschlussbox Dimensions: 51 mm x 24 mm titps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf Article no:: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer Power: 4 -	
Power: 1 - 7, 2 W, Plug&Play + Anschlussbox           Dimensions: 68 mm x 35 mm x 21 mm           https://www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf           Vitroile no.: 17663000           ED converter 350 mA, trailing-edge phase dimmable           Power: 2, 8 - 7 W, Plug&Play           Dimensions: 110 mm x 50 mm x 19 mm           ttrict: //www.brumberg.com/fileadmin/products/Datenblatt_17663000_2021_DE.pdf           Vitcle no.: 17663020           ED converter 350 mA, trailing-edge phase dimmable           Power: 2, 8 - 7 W, Plug&Play + Anschlussbox           Dimensions: 110 mm x 50 mm x 19 mm           ttrs://www.bmmberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf           Vitcle no.: 17613000           ED converter 350 mA, on/off switchable           Power: 1 - 15 W, Plug&Play           Dimensions: 115 mm x 34 mm x 19 mm           ttrs://www.bmmberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf           Vitcle no:: 17613020           ED converter 350 mA, on/off switchable           Power: 1 - 15 W, Plug&Play + Anschlussbox           Dimensions:: 115 mm x 34 mm x 19 mm           ttps://www.bmmberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf           Vitcle no:: 17621000           ED converter 350 mA, on/off switchable           Power: 1 - 21 W, Plug&Play + Anschlussbox      <	
Dimensions: 68 mm x 35 mm x 21 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf Vitcle no:: 17663000 ED converter 350 mA, trailing-edge phase dimmable Yower: 2,8 - 7 W, Plug&Play Dimensions: 110 mm x 50 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17663000_2021_DE.pdf Vitcle no:: 17663020 ED converter 350 mA, trailing-edge phase dimmable Power: 2,8 - 7 W, Plug&Play + Anschlussbox Dimensions: 110 mm x 50 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf Vitcle no:: 17613000 ED converter 350 mA, on/off svitchable Power: 1 - 15 W, Plug&Play Vitcle no:: 1761300 ED converter 350 mA, on/off svitchable Power: 1 - 15 W, Plug&Play Vitcle no:: 1761300 ED converter 350 mA, on/off svitchable Power: 1 - 15 W, Plug&Play + Anschlussbox Dimensions: 115 mm x 34 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf Vitcle no:: 1761300 ED converter 350 mA, on/off svitchable Power: 1 - 15 W, Plug&Play + Anschlussbox Dimensions: 115 mm x 34 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf Vitcle no:: 17621000 ED converter 350 mA, on/off svitchable Power: 1 - 21 W, Plug&Play + Anschlussbox Dimensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf Vitcle no:: 7762100 ED converter 350 mA, on/off svitchable Power: 1 - 21 W, Plug&Play + Anschlussbox Dimensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Vitcle no:: 77621020 ED converter 350 mA, n/off svitchable Power: 1 - 21 W, Plug&Play + Anschlussbox Dimensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Vitcle no:: 77652000 ED-round converter 350 mA, trailing-edge phase dimmer Power: 4.9 - 7 W, Plug&Play + Anschlussbox	
<pre>tttps://www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf  Article no:: 1763000 ED converter 350 mA, trailing-edge phase dimmable Yower: 2,8 - 7 W, Plug&amp;Play  tttps://www.brumberg.com/fileadmin/products/Datenblatt_17663000_2021_DE.pdf  Article no:: 17643020 ED converter 350 mA, trailing-edge phase dimmable Yower: 2,8 - 7 W, Plug&amp;Play + Anschlussbox  Jimensions:: 110 mm x 50 mm x 19 mm Ittps://www.brumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf  Article no:: 17613000 ED converter 350 mA, or off switchable Yower: 1.5 W, Plug&amp;Play + Anschlussbox  Jimensions:: 115 mm x 34 mm x 19 mm Ittps://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf  Article no:: 17613020 ED converter 350 mA, on/off switchable Yower: 1.5 W, Plug&amp;Play + Anschlussbox  Jimensions:: 115 mm x 34 mm x 19 mm Ittps://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf  Article no:: 17613020 ED converter 350 mA, on/off switchable Yower: 1.5 W, Plug&amp;Play + Anschlussbox Jimensions:: 115 mm x 34 mm x 19 mm Ittps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf Article no:: 17613020 ED converter 350 mA, on/off switchable Yower: 1.2 W, Plug&amp;Play + Anschlussbox Jimensions:: 115 mm x 34 mm x 19 mm Ittps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf Article no:: 77613020 ED converter 350 mA, on/off switchable Yower: 1.2 W, Plug&amp;Play + Anschlussbox Jimensions:: 115 mm x 34 mm x 13 mm Ittps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf Article no:: 77652000 ED converter 350 mA, on/off switchable Yower: 1.2 W, Plug&amp;Play + Anschlussbox Jimensions:: 12 mm x 34 mm x 13 mm Ittps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf Article no:: 77652000 ED-converter 350 mA, trailing-edge phase dimmer Yower: 4.9 - 7 W, Plug&amp;Play + Anschlussbox Jimensions:: 15 mm x 34 mm Ittps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf Article no:: 1765200 ED-converter 350 mA, trailing-edge phase dimme</pre>	
Article no.: 17663000 ED converter 350 mA, trailing-edge phase dimmable Sover: 2.8 - 7X, Plug&Play Dimensions: 110 mm x 50 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17663000_2021_DE.pdf Article no.: 17663020 ED converter 350 mA, nr/off switchable Power: 1.9 - TX, Plug&Play + Anschlussbox Dimensions: 115 mm x 44 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf Article no.: 17613000 ED converter 350 mA, on/off switchable Power: 1.15 Wn, Plug&Play + Anschlussbox Dimensions: 115 mm x 44 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf Article no.: 1761000 ED converter 350 mA, on/off switchable Power: 1.15 Wn, Plug&Play + Anschlussbox Dimensions: 115 mm x 44 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf Article no.: 17621020 ED converter 350 mA, on/off switchable Power: 1.21 W, Plug&Play + Anschlussbox Dimensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf Article no.: 17621020 ED converter 350 mA, on/off switchable Power: 1.21 W, Plug&Play Dimensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf Article no.: 7621002 ED converter 350 mA, on/off switchable Power: 1.21 W, Plug&Play + Anschlussbox Dimensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Article no:: 7652000 ED-round converter 350 mA, railing-edge phase dimmer Power: 4.9 - 7 W, Plug&Play Dimensions: 51 mm x 24 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf Article no:: 17652000 ED-round converter 350 mA, trailing-edge phase dimmer Power: 4.9 - 7 W, Plug&Play + Anschlussbox	
ED converter 350 mA, trailing-edge phase dimmable         Power: 2, 9, - 7 W, Plug&Play         Dimensions: 110 mm x 50 mm x 19 mm         tttps://www.brumberg.com/fileadmin/products/Datenblatt_17663000_2021_DE.pdf         Article no:: 17663020         ED converter 350 mA, trailing-edge phase dimmable         >Ower: 2, 8, - 7 W, Plug&Play + Anschlussbox         Dimensions: 110 mm x 50 mm x 19 mm         ttps://www.brumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf         Article no:: 17613000         ED converter 350 mA, on/off switchable         Power: 1 - 15 W, Plug&Play         Dimensions: 115 mm x 34 mm x 19 mm         ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf         Article no:: 17613020         ED converter 350 mA, on/off switchable         >ower: 1 - 15 W, Plug&Play + Anschlussbox         Dimensions: 115 mm x 34 mm x 19 mm         ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf         Article no:: 17621000         ED converter 350 mA, on/off switchable         >ower: 1 - 21 W, Plug&Play + Anschlussbox         Dimensions: 128 mm x 13 mm         ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf         Article no:: 17621020         ED converter 350 mA, on/off switchable         >ower: 1 - 21 W, Plug&Play + Anschlu	
Power: 2, 8, - 7 W, Plug&Play Dimensions: 110 mm x 50 mm x 19 mm Tittps://www.brumberg.com/fileadmin/products/Datenblatt_17663000_2021_DE.pdf Article no.: 17663020 ED converter 350 mA, trailing-edge phase dimmable Power: 2, 8, - 7 W, Plug&Play + Anschlussbox Dimensions: 110 mm x 50 mm x 19 mm tittps://www.brumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf Article no.: 17613000 ED converter 350 mA, on/off switchable Power: 1 - 15 W, Plug&Play Dimensions: 115 mm x 34 mm x 19 mm tittps://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf Article no.: 17613000 ED converter 350 mA, on/off switchable Power: 1 - 15 W, Plug&Play + Anschlussbox Dimensions: 115 mm x 34 mm x 19 mm tittps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf Article no.: 1761200 ED converter 350 mA, on/off switchable Power: 1 - 15 W, Plug&Play + Anschlussbox Dimensions: 115 mm x 34 mm x 19 mm tittps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf Article no.: 17621000 ED converter 350 mA, on/off switchable Power: 1 - 11 W, Plug&Play Power: 1 - 11 W, Plug&Play Dimensions: 112 mm x 45 mm x 19 mm tittps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf Article no.: 17621020 ED converter 350 mA, on/off switchable Power: 1 - 21 W, Plug&Play Dimensions: 128 mm x 50 mm x 13 mm tittps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Article no.: 17621020 ED converter 350 mA, on/off switchable Power: 1 - 21 W, Plug&Play + Anschlussbox Dimensions: 128 mm x 50 mm x 13 mm tittps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Article no.: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer Power: 4, 9 - 7 W, Plug&Play + Anschlu	
Dimensions: 110 mm x 50 mm x 19 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17663000_2021_DE.pdf Article no: 17663020 ED converter 350 mA, nrailing-edge phase dimmable Power: 2,8 - 7 W, Plug&Play + Anschlussbox Dimensions: 110 mm x 50 mm x 19 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf Article no: 17613000 ED converter 350 mA, on/off switchable Power: 1 - 15 W, Plug&Play Dimensions: 115 mm x 34 mm x 19 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf Article no: 17613020 ED converter 350 mA, on/off switchable Power: 1 - 15 W, Plug&Play + Anschlussbox Dimensions: 115 mm x 34 mm x 19 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf Article no: 17621020 ED converter 350 mA, on/off switchable Power: 1 - 15 W, Plug&Play + Anschlussbox Dimensions: 115 mm x 34 mm x 19 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf Article no: 17621000 ED converter 350 mA, on/off switchable Power: 1 - 17621020 ED converter 350 mA, on/off switchable Power: 1 - 1 V, Plug&Play Dimensions: 128 mm x 50 mm x 13 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Article no: 17621020 ED converter 350 mA, on/off switchable Power: 1 - 1 V, Plug&Play + Anschlussbox Dimensions: 128 mm x 50 mm x 13 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Article no: 17621020 ED converter 350 mA, on/off switchable Power: 4,9 - 7 W, Plug&Play Dimensions: 51 mm x 24 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Article no: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play Dimensions: 51 mm x 24 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf Article no: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play + Anschlussbox	
https://www.brumberg.com/fileadmin/products/Datenblatt_17663000_2021_DE.pdf  Article no:: 17663020 ED converter 350 mA, railing-edge phase dimmable Power: 2, 8 - 7 W, Plug&Play + Anschlussbox Dimensions:: 110 mm x 50 mm x 19 mm Tubs://www.brumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf Article no:: 17613000 ED converter 350 mA, on/off switchable Yower: 1 - 15 W, Plug&Play Dimensions:: 115 mm x 34 mm x 19 mm Tutps://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf Article no:: 17613020 ED converter 350 mA, on/off switchable Yower: 1 - 15 W, Plug&Play + Anschlussbox Dimensions:: 15 mm x 34 mm x 19 mm Tutps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf Article no:: 17613020 ED converter 350 mA, on/off switchable Yower: 1 - 15 W, Plug&Play + Anschlussbox Dimensions:: 15 mm x 34 mm x 19 mm Tutps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf Article no:: 17621000 ED converter 350 mA, on/off switchable Yower: 1 - 21 W, Plug&Play Dimensions:: 128 mm x 50 mm x 13 mm Tutps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf Article no:: 17621020 ED converter 350 mA, on/off switchable Yower: 1 - 21 W, Plug&Play Dimensions:: 128 mm x 50 mm x 13 mm Tutps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Article no:: 17621020 ED converter 350 mA, on/off switchable Yower: 1 - 21 W, Plug&Play + Anschlussbox Dimensions:: 128 mm x 50 mm x 13 mm Tutps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Article no:: 17621020 ED converter 350 mA, on/off switchable Yower: 4.9 - 7 W, Plug&Play Dimensions:: 51 mm x 44 mm Tutps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf Article no:: 7652020 ED-round converter 350 mA, trailing-edge phase dimmer Yower: 4.9 - 7 W, Plug&Play + Anschlussbox Dimensions: 51 mm x 24 mm Tutps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf Article no:: 7652020 ED-round converter 350 mA, trailing-edge phase dimmer Yower: 4.9 -	
Article no: 17663020 ED converter 350 mA, trailing-edge phase dimmable 30ewer: 2,8 - 7 W, Plug&Play + Anschlussbox Dimensions: 110 mm × 50 mm × 19 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf Article no: 17613000 ED converter 350 mA, on/off switchable 30ewer: 1 - 15 W, Plug&Play Dimensions: 115 mm × 34 mm × 19 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf Article no: 17613020 ED converter 350 mA, on/off switchable 30ewer: 1 - 15 W, Plug&Play + Anschlussbox Dimensions: 115 mm × 34 mm × 19 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf Article no: 17613020 ED converter 350 mA, on/off switchable 30ewer: 1 - 21 W, Plug&Play + Anschlussbox Dimensions: 128 mm × 50 mm × 13 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf Article no: 17621020 ED converter 350 mA, on/off switchable 30ewer: 1 - 21 W, Plug&Play Dimensions: 128 mm × 50 mm × 13 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf Article no: 17621020 ED converter 350 mA, on/off switchable 30ewer: 1 - 21 W, Plug&Play + Anschlussbox 30imensions: 128 mm × 50 mm × 13 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Article no: 1762000 ED-converter 350 mA, on/off switchable 30imensions: 128 mm × 50 mm × 13 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Article no: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer 30ewer: 4,9 - 7 W, Plug&Play Dimensions: 126 mA, PlayBhay Dimensions: 126 mA, PlayBhay Dimensions: 126 mA, PlayBhay Dimensions: 126 mA, PlayBhay 30emensions: 126 mA, trailing-edge phase dimmer 30ewer: 4,9 - 7 W, Plug&Play + Anschlussbox ED-round converter 4750 mA, trailing-edge phase dimmer 30ewer: 4,9 - 7 W, Plug&Play + Anschlussbox	
ED converter 350 mA, trailing-edge phase dimmable         Power: 2,8 - 7 W, Plug&Play + Anschlussbox         Dimensions: 110 mm x 50 mm x 19 mm         tttps://www.brumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf         Article no:: 17613000         ED converter 350 mA, on/off switchable         Power: 1 - 15 W, Plug&Play         Dimensions:: 115 mm x 34 mm x 19 mm         ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf         Article no:: 17613020         ED converter 350 mA, on/off switchable         Power: 1 - 15 W, Plug&Play         Dimensions: 115 mm x 34 mm x 19 mm         ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf         Article no:: 1761020         ED converter 350 mA, on/off switchable         Power: 1 - 21 W, Plug&Play         Dimensions:: 115 mm x 34 mm x 19 mm         ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf         Article no:: 17621000         ED converter 350 mA, on/off switchable         Power: 1 - 21 W, Plug&Play         Dimensions:: 128 mm x 50 mm x 13 mm         ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf         Article no:: 17652000         ED-round converter 350 mA, con/off switchable         Power: 4.9 - 7 W, Plug&PlayPlay + Anschlussbox	
Power: 2,8 - 7 W, Plug&Play + Ånschlussbox           Dimensions: 110 mm x 50 mm x 19 mm           Uttips://www.brumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf           Article no:: 17613000           ED converter 350 mA, on/off switchable           Power: 1 - 15 W, Plug&Play           Dimensions:: 115 mm x 34 mm x 19 mm           ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf           Article no:: 17613020           ED converter 350 mA, on/off switchable           Power: 1 - 15 W, Plug&Play + Anschlussbox           Dimensions:: 115 mm x 34 mm x 19 mm           ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf           Article no:: 17621000           ED converter 350 mA, on/off switchable           Power: 1 - 21 W, Plug&Play           Power: 10 - 21 M, Plug&Play           Dimensions: 128 mm x 50 mm x 13 mm           ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf           Article no:: 17621020           ED converter 350 mA, on/off switchable           Power: 1 - 21 W, Plug&Play + Anschlussbox           Dimensions: 128 mm x 50 mm x 13 mm           ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf           Article no:: 17652000           LED-round converter 350 mA, trailing-edge phase dimmer           Pow	
Dimensions: 110 mm x 50 mm x 19 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf Article no:: 17613000 ED converter 350 mA, on/off switchable Power: 1 - 15 W, Plug&Play Dimensions: 115 mm x 34 mm x 19 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf Article no:: 17613020 ED converter 350 mA, on/off switchable Power: 1 - 15 W, Plug&Play + Anschlussbox Dimensions: 115 mm x 34 mm x 19 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf Article no:: 17621000 ED converter 350 mA, on/off switchable Power: 1 - 21 W, Plug&Play + Anschlussbox Dimensions: 128 mm x 50 mm x 13 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf Article no:: 17621020 ED converter 350 mA, on/off switchable Power: 1 - 21 W, Plug&Play + Anschlussbox Dimensions: 128 mm x 50 mm x 13 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Article no:: 17652000 ED-converter 350 mA, trailing-edge phase dimmer Power: 4, 9 - 7 W, Plug&Play + Anschlussbox Dimensions: 51 mm x 24 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf Article no:: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer Power: 4, 9 - 7 W, Plug&Play + Anschlussbox	
https://www.brumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf Article no.: 17613000 ED converter 350 mA, on/off switchable Yower: 1-15 W, Plug&Play Dimensions: 115 mm x 34 mm x 19 mm tttps://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf Article no.: 17613020 ED converter 350 mA, on/off switchable Yower: 1-15 W, Plug&Play + Anschlussbox Dimensions: 115 mm x 34 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf Article no.: 17621000 ED converter 350 mA, on/off switchable Yower: 1-21 W, Plug&Play Dimensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf Article no.: 17621020 ED converter 350 mA, on/off switchable Yower: 1-21 W, Plug&Play + Anschlussbox Dimensions: 128 mm x 50 mm x 13 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Article no.: 17652000 ED-converter 350 mA, trailing-edge phase dimmer Yower: 4.9 - 7 W, Plug&Play + Anschlussbox Dimensions: Yower, Y	
Article no.: 176 13000 ED converter 350 mA, on/off switchable Power: 1 - 15 W, Plug&Play Dimensions: 115 mm x 34 mm x 19 mm https://www.brumberg.com/fileadmin/products/Datenblatt_176 13000_2021_DE.pdf Article no.: 176 13020 ED converter 350 mA, on/off switchable Power: 1 - 15 W, Plug&Play + Anschlussbox Dimensions: 115 mm x 34 mm x 19 mm https://www.brumberg.com/fileadmin/products/Datenblatt_176 13020_2021_DE.pdf Article no.: 176 21000 ED converter 350 mA, on/off switchable Power: 1 - 21 W, Plug&Play Dimensions: 128 mm x 50 mm x 13 mm https://www.brumberg.com/fileadmin/products/Datenblatt_176 21000_2021_DE.pdf Article no.: 176 21020 ED converter 350 mA, on/off switchable Power: 1 - 21 W, Plug&Play + Anschlussbox Dimensions: 128 mm x 50 mm x 13 mm https://www.brumberg.com/fileadmin/products/Datenblatt_176 21020_2021_DE.pdf Article no.: 176 2000 ED converter 350 mA, on/off switchable Power: 4 - 21 W, Plug&Play + Anschlussbox Dimensions: 1 28 mm x 50 mm x 13 mm https://www.brumberg.com/fileadmin/products/Datenblatt_176 21020_2021_DE.pdf Article no.: 176 52000 ED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play + Anschlussbox	
LED converter 350 mA, on/off switchable Power: 1 - 15 W, Plug&Play Dimensions: 115 mm x 34 mm x 19 mm tttps://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf Article no:: 17613020 LED converter 350 mA, on/off switchable Power: 1 - 15 W, Plug&Play + Anschlussbox Dimensions: 115 mm x 34 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf Article no:: 17621000 LED converter 350 mA, on/off switchable Power: 1 - 21 W, Plug&Play Dimensions: 128 mm x 50 mm x 13 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf Article no:: 17621020 LED converter 350 mA, on/off switchable Power: 1 - 21 W, Plug&Play + Anschlussbox Dimensions: 128 mm x 50 mm x 13 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Article no:: 17621020 LED converter 350 mA, on/off switchable Power: 1 - 21 W, Plug&Play + Anschlussbox Dimensions: 128 mm x 50 mm x 13 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Article no:: 17652000 LED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play Dimensions: 51 mm x 24 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf Article no:: 17652020 LED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play + Anschlussbox	
Power: 1 - 15 W, Plug&Play Dimensions: 115 mm x 34 mm x 19 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf Article no.: 17613020 LED converter 350 mA, on/off switchable Power: 1 - 15 W, Plug&Play + Anschlussbox Dimensions: 115 mm x 34 mm x 19 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf Article no.: 17621000 LED converter 350 mA, on/off switchable Power: 1 - 21 W, Plug&Play Dimensions: 128 mm x 50 mm x 13 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf Article no.: 17621020 LED converter 350 mA, on/off switchable Power: 1 - 21 W, Plug&Play + Anschlussbox Dimensions: 128 mm x 50 mm x 13 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Article no.: 17621020 LED converter 350 mA, on/off switchable Power: 1 - 21 W, Plug&Play + Anschlussbox Dimensions: 128 mm x 50 mm x 13 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Article no.: 17625000 LED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play Dimensions: 51 mm x 24 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf Article no.: 17652020 LED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play + Anschlussbox	
Dimensions: 115 mm x 34 mm x 19 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf Article no.: 17613020 EDE converter 350 mA, on/off switchable Power: 1 - 15 W, Plug&Play + Anschlussbox Dimensions: 115 mm x 34 mm x 19 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf Article no.: 17621000 EDE converter 350 mA, on/off switchable Power: 1 - 21 W, Plug&Play Dimensions: 128 mm x 50 mm x 13 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf Article no.: 17621020 EDE converter 350 mA, on/off switchable Power: 1 - 21 W, Plug&Play + Anschlussbox Dimensions: 128 mm x 50 mm x 13 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Article no.: 17621020 EDE converter 350 mA, on/off switchable Power: 1 - 21 W, Plug&Play + Anschlussbox Dimensions: 128 mm x 50 mm x 13 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Article no.: 17652000 ED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play Dimensions: 51 mm x 24 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf Article no.: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play + Anschlussbox	
https://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf Article no.: 17613020 .ED converter 350 mA, on/off switchable Power: 1 - 15 W, Plug&Play + Anschlussbox Dimensions: 115 mm x 34 mm x 19 mm .ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf Article no.: 17621000 .ED converter 350 mA, on/off switchable Power: 1 - 21 W, Plug&Play Dimensions: 128 mm x 50 mm x 13 mm .ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf Article no.: 17621020 .ED converter 350 mA, on/off switchable Power: 1 - 21 W, Plug&Play + Anschlussbox Dimensions: 128 mm x 50 mm x 13 mm .ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Article no.: 17652000 .ED converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play Dimensions: 51 mm x 24 mm .ttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf Article no.: 17652020 .ED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play + Anschlussbox	
Article no.: 17613020 LED converter 350 mA, on/off switchable Power: 1 - 15 W, Plug&Play + Anschlussbox Dimensions: 115 mm x 34 mm x 19 mm tttps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf Article no.: 17621000 LED converter 350 mA, on/off switchable Power: 1 - 21 W, Plug&Play Dimensions: 128 mm x 50 mm x 13 mm tttps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf Article no.: 17621020 LED converter 350 mA, on/off switchable Power: 1 - 21 W, Plug&Play + Anschlussbox Dimensions: 128 mm x 50 mm x 13 mm tttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Article no.: 17652000 LED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play Dimensions: 51 mm x 24 mm tttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf Article no.: 17652020 LED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play Dimensions: 51 mm x 24 mm tttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf Article no.: 17652020 LED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play + Anschlussbox	
LED converter 350 mA, on/off switchable Power: 1 - 15 W, Plug&Play + Anschlussbox Dimensions: 115 mm x 34 mm x 19 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf Article no.: 17621000 LED converter 350 mA, on/off switchable Power: 1 - 21 W, Plug&Play Dimensions: 128 mm x 50 mm x 13 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf Article no.: 17621020 LED converter 350 mA, on/off switchable Power: 1 - 21 W, Plug&Play + Anschlussbox Dimensions: 128 mm x 50 mm x 13 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Article no.: 17652000 LED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play Dimensions: 51 mm x 24 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf Article no.: 17652020 LED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play Dimensions: 51 mm x 24 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf Article no.: 17652020 LED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play + Anschlussbox	https://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf
Power: 1 - 15 W, Plug&Play + Anschlussbox Dimensions: 115 mm x 34 mm x 19 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf Article no.: 17621000 .ED converter 350 mA, on/off switchable Power: 1 - 21 W, Plug&Play Dimensions: 128 mm x 50 mm x 13 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf Article no.: 17621020 .ED converter 350 mA, on/off switchable Power: 1 - 21 W, Plug&Play + Anschlussbox Dimensions: 128 mm x 50 mm x 13 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Article no.: 17621020 .ED converter 350 mA, on/off switchable Power: 1 - 21 W, Plug&Play + Anschlussbox Dimensions: 128 mm x 50 mm x 13 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Article no.: 17652000 .ED-round converter 350 mA, trailing-edge phase dimmer Power: 4, 9 - 7 W, Plug&Play Dimensions: 51 mm x 24 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf Article no.: 17652020 .ED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play + Anschlussbox	Article no.: 17613020
Dimensions: 115 mm x 34 mm x 19 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf Article no.: 17621000 .ED converter 350 mA, on/off switchable Power: 1 - 21 W, Plug&Play Dimensions: 128 mm x 50 mm x 13 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf Article no.: 17621020 .ED converter 350 mA, on/off switchable Power: 1 - 21 W, Plug&Play + Anschlussbox Dimensions: 128 mm x 50 mm x 13 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Article no.: 17652000 .ED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play Dimensions: 51 mm x 24 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf Article no.: 17652020 .ED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play Dimensions: 51 mm x 24 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf Article no.: 17652020 .ED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play + Anschlussbox	
https://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf Article no.: 17621000 ED converter 350 mA, on/off switchable Power: 1 - 21 W, Plug&Play Dimensions: 128 mm x 50 mm x 13 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf Article no.: 17621020 ED converter 350 mA, on/off switchable Power: 1 - 21 W, Plug&Play + Anschlussbox Dimensions: 128 mm x 50 mm x 13 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Article no.: 17652000 ED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play Dimensions: 51 mm x 24 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf Article no.: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play Dimensions: 51 mm x 24 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf Article no.: 17652020 ED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play + Anschlussbox	
Article no.: 17621000 ED converter 350 mA, on/off switchable Power: 1 - 21 W, Plug&Play Dimensions: 128 mm x 50 mm x 13 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf Article no.: 17621020 ED converter 350 mA, on/off switchable Power: 1 - 21 W, Plug&Play + Anschlussbox Dimensions: 128 mm x 50 mm x 13 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Article no.: 17652000 .ED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play Dimensions: 51 mm x 24 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf Article no.: 17652020 .ED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play + Anschlussbox	
ED converter 350 mA, on/off switchable         Power: 1 - 21 W, Plug&Play         Dimensions: 128 mm x 50 mm x 13 mm         https://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf         Article no.: 17621020         ED converter 350 mA, on/off switchable         Power: 1 - 21 W, Plug&Play + Anschlussbox         Dimensions: 128 mm x 50 mm x 13 mm         https://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf         Article no.: 17652000         ED-round converter 350 mA, trailing-edge phase dimmer         Power: 4,9 - 7 W, Plug&Play         Dimensions: 51 mm x 24 mm         https://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf         Article no.: 17652020         ED-round converter 350 mA, trailing-edge phase dimmer         Power: 4,9 - 7 W, Plug&Play + Anschlussbox	https://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf
Power: 1 - 21 W, Plug&Play Dimensions: 128 mm x 50 mm x 13 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf Article no.: 17621020 LED converter 350 mA, on/off switchable Power: 1 - 21 W, Plug&Play + Anschlussbox Dimensions: 128 mm x 50 mm x 13 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Article no.: 17652000 LED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play Dimensions: 51 mm x 24 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf Article no.: 17652020 LED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play Dimensions: 51 mm x 24 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf Article no.: 17652020 LED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play + Anschlussbox	Article no.: 17621000
Dimensions: 128 mm x 50 mm x 13 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf Article no.: 17621020 LED converter 350 mA, on/off switchable Power: 1 - 21 W, Plug&Play + Anschlussbox Dimensions: 128 mm x 50 mm x 13 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Article no.: 17652000 LED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play Dimensions: 51 mm x 24 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf Article no.: 17652020 LED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play + Anschlussbox	LED converter 350 mA, on/off switchable
https://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf Article no.: 17621020 .ED converter 350 mA, on/off switchable Power: 1 - 21 W, Plug&Play + Anschlussbox Dimensions: 128 mm x 50 mm x 13 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Article no.: 17652000 .ED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play Dimensions: 51 mm x 24 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf Article no.: 17652020 .ED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play + Anschlussbox	Power: 1 - 21 W, Plug&Play
Article no.: 17621020 LED converter 350 mA, on/off switchable Power: 1 - 21 W, Plug&Play + Anschlussbox Dimensions: 128 mm x 50 mm x 13 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Article no.: 17652000 LED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play Dimensions: 51 mm x 24 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf Article no.: 17652020 LED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play + Anschlussbox	
LED converter 350 mA, on/off switchable Power: 1 - 21 W, Plug&Play + Anschlussbox Dimensions: 128 mm x 50 mm x 13 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Article no.: 17652000 LED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play Dimensions: 51 mm x 24 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf Article no.: 17652020 LED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play + Anschlussbox	https://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf
Power: 1 - 21 W, Plug&Play + Anschlussbox Dimensions: 128 mm x 50 mm x 13 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Article no.: 17652000 LED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play Dimensions: 51 mm x 24 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf Article no.: 17652020 LED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play + Anschlussbox	Article no.: 17621020
Dimensions: 128 mm x 50 mm x 13 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Article no.: 17652000 LED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play Dimensions: 51 mm x 24 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf Article no.: 17652020 LED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play + Anschlussbox	LED converter 350 mA, on/off switchable
https://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf Article no.: 17652000 LED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play Dimensions: 51 mm x 24 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf Article no.: 17652020 LED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play + Anschlussbox	Power: 1 - 21 W, Plug&Play + Anschlussbox
Article no.: 17652000 LED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play Dimensions: 51 mm x 24 mm <u>https://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf</u> Article no.: 17652020 LED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play + Anschlussbox	Dimensions: 128 mm x 50 mm x 13 mm
LED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play Dimensions: 51 mm x 24 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf Article no.: 17652020 LED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play + Anschlussbox	https://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf
Power: 4,9 - 7 W, Plug&Play Dimensions: 51 mm x 24 mm <u>https://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf</u> Article no.: 17652020 _ED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play + Anschlussbox	Article no.: 17652000
Dimensions: 51 mm x 24 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf Article no.: 17652020 LED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play + Anschlussbox	LED-round converter 350 mA, trailing-edge phase dimmer
https://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf Article no.: 17652020 .ED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play + Anschlussbox	Power: 4,9 - 7 W, Plug&Play
Article no.: 17652020 LED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play + Anschlussbox	Dimensions: 51 mm x 24 mm
.ED-round converter 350 mA, trailing-edge phase dimmer Power: 4,9 - 7 W, Plug&Play + Anschlussbox	https://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf
Power: 4,9 - 7 W, Plug&Play + Anschlussbox	Article no.: 17652020
	LED-round converter 350 mA, trailing-edge phase dimmer
Dimensions: 51 mm x 24 mm	Power: 4,9 - 7 W, Plug&Play + Anschlussbox
	Dimensions: 51 mm x 24 mm
<pre>ittps://www.brumberg.com/fileadmin/products/Datenblatt_17652020_2021_DE.pdf</pre>	https://www.brumberg.com/fileadmin/products/Datenblatt_17652020_2021_DE.pdf

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 10.04.2025 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/

Required accessories
Article no.: 17640000
LED converter 350 mA, trailing-edge phase dimmable
Power: 4,2 - 10 W, Plug&Play
Dimensions: 102 mm x 38 mm x 21 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17640000_2021_DE.pdf
Article no.: 17640020
LED converter 350 mA, trailing-edge phase dimmable
Power: 4,2 - 10 W, Plug&Play + Anschlussbox
Dimensions: 102 mm x 38 mm x 21 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17640020_2021_DE.pdf
Article no.: 17648000
LED converter 350 mA, trailing-edge phase dimmable
Power: 0,7 - 17 W, Plug&Play
Dimensions: 166 mm x 46 mm x 34 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17648000_2021_DE.pdf
Article no.: 17648020
LED converter 350 mA, trailing-edge phase dimmable
Power: 0,7 - 17 W, Plug&Play + Anschlussbox
Dimensions: 166 mm x 46 mm x 34 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17648020_2021_DE.pdf
Article no.: 17657000
LED converter 350 mA, 1-10 V dimmable (analog)
Power: 5,2 - 18 W, Plug&Play
Dimensions: 110 mm x 52 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17657000_2021_DE.pdf
Article no.: 17682000
LED converter 350 mA, DALI dimmable (digital)
Power: 1,8 - 18,5 W, Plug&Play
Dimensions: 146.5 mm x 43.5 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17682000_2021_DE.pdf
Article no.: 17682020
LED converter 350 mA, DALI dimmable (digital)
Power: 1,8 - 18,5 W, Plug&Play + Anschlussbox
Dimensions: 146.5 mm x 43.5 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17682020_2021_DE.pdf
Article no.: 17683000
LED converter 350 mA, DALI dimmable (digital)
Power: 3,5 - 17 W, Plug&Play
Dimensions: 110.5 mm x 52 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17683000_2021_DE.pdf
Article no.: 17683020
LED converter 350 mA, DALI dimmable (digital)
Power: 3,5 - 17 W, Plug&Play + Anschlussbox
Dimensions: 110.5 mm x 52 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17683020_2021_DE.pdf
Article no.: 17684000
LED converter 350 mA, DALI dimmable (digital)
Power: 2,8 - 7 W, Plug&Play
Dimensions: 130 mm x 42 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17684000_2021_DE.pdf

Required accessories
Article no.: 17684020
LED converter 350 mA, DALI dimmable (digital)
Power: 2,8 - 7 W, Plug&Play + Anschlussbox
Dimensions: 130 mm x 42 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17684020_2021_DE.pdf
Article no.: 17658000
LED round converter 350 mA, DALI dimmable (digital)
Power: 2,1 - 9 W, Plug&Play
Dimensions: 56 mm x 25 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17658000_2021_DE.pdf
Article no.: 17658020
LED round converter 350 mA, DALI dimmable (digital)
Power: 2,1 - 9 W, Plug&Play + Anschlussbox
Dimensions: 56 mm x 25 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17658020_2021_DE.pdf
Article no.: 17671000
LED converter 350mA, ZigBee dimmable
Power: 3,5 - 18,5 W, Plug&Play
Dimensions: 146.5 mm x 44 mm x 30 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17671000_2021_DE.pdf
Article no.: 17671020
LED converter 350mA, ZigBee dimmable
Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox
Dimensions: 146.5 mm x 44 mm x 30 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf
Article no.: 17672000
LED converter 350mA, Casambi dimmable
Power: 3,5 - 18,5 W, Plug&Play
Dimensions: 146.5 mm x 44 mm x 30 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf
Article no.: 17672020
LED converter 350mA, Casambi dimmable
Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox
Dimensions: 146.5 mm x 44 mm x 30 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17672020_2021_DE.pdf



Optional accessories
Article no.: 81201170
Reducing ring D 110 mm, for luminaire cut-out size 68 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_81201170_2021_DE.pdf
Article no.: 81202170
Reducing ring D 130 mm, for luminaire cut-out size 68 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_81202170_2021_DE.pdf
Article no.: 81203170
Reducing ring D 145 mm, for luminaire cut-out size 68 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_81203170_2021_DE.pdf
Article no.: 3835
Plug & Play extension lead 350 mA
Dimensions: 500 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_00003835_2021_DE.pdf
Article no.: 3836
Plug & Play extension lead 350 mA
Dimensions: 1,000 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_00003836_2021_DE.pdf
Article no.: 3837
Plug & Play extension lead 350 mA
Dimensions: 2,000 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_00003837_2021_DE.pdf