


Dimmer mit Taster, Serie 1002 MONO

Dimmer with push button, series 1002 MONO

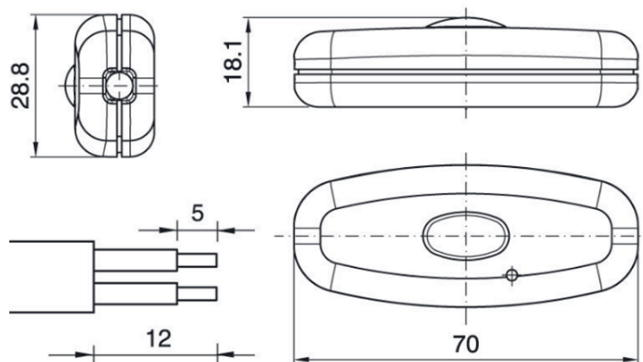

		12 Vdc / 24 Vdc	350 mA	700 mA
Artikelnummer schwarz	Part no. black	033038	032232	034330
Typ schwarz	Type black	D-1002-14-48B	D-1002-350-8,4B	D-1002-700-17B
Artikelnummer weiß	Part no. white	029675	auf Anfrage	036501
Typ weiß	Type white	D-1002-14-48W	D-1002-350-8,4W	D-1002-700-17W
Artikelnummer transparent	Part no. transparent	030258	030239	030390
Typ transparent	Type transparent	D-1002-14-48T	D-1002-350-8,4T	D-1002-700-17T
Eingangsspannung	Input voltage	12..24 Vdc		
Ausgangsleistung 12 Vdc	Output power 12 Vdc	24 W	4,2 W	7,4 W
Ausgangsleistung 24 Vdc	Output power 24 Vdc	48 W	8,4 W	16,8 W
Umgebungstemperatur (ta)	Ambient temperature (ta)	max. 35 °C		
Erwartete Lebensdauer	Estimated lifetime	40.000 h		
Erforderlicher Kabelquerschnitt	Cable cross section	H03VVH2-F 2x0,75mm ² ; H03VV-F-2x0,75mm ²		
Abmessungen	Dimensions	70 x 30 x 18 mm		

- Elektronischer PWM Dimmer für LEDs für konstante Spannung; konstanten Strom
- Integrierte LED für Sichtbarkeit und Anzeige der Versorgungsspannung
- Funktionsweise:
 - **Taster kurz drücken:** Einschalten (auf vorherigen Helligkeitswert) bzw. ausschalten
 - **Taster länger drücken:** heller bzw. dunkler dimmen
 - Bei Wiederanschalten auf der Primärseite wird die vorherige Helligkeit eingestellt (permanentes Memory).
- Weitere Ausführungen verfügbar

- Electronic PWM dimmer for LEDs for constant voltage; constant current
- Integrated LED for visibility and indication of the supply voltage
- Functionality:
 - **press once:** switch on (to previous brightness level) / off.
 - **press and hold:** turn up light/dim light
 - when primary side is switched on again, the previous brightness will be restored (permanent memory).
- Other versions available