

Datablad

Art. Nr. 96.452.2000.6

Konfektioneret kabel RST20i5KSBS 15P 20TB0

 RST20i5 5-pol mellemkabel han/hun længde: 2M. Kodefarve: turkis. Kapslingsklasse: IP69. Kabel: H05VV-F, kvadrat: 1,5mm² kabelfarve: sort


Art. Nr.	96.452.2000.6
EAN	4015573941786
Ordre enhed	20 styk

Godkendelser

Specifikationer
Note

Note	
------	--

Generelt

Nominal strøm	16 A
Nominal spænding	250 V
Nominal impuls spænding	4 kV
Forureningsgrad	3
Kontakt modstand	23,9 mOhm
låsbar	
Farve på kodning/kontaktindsats	turkisblå
Pol mærkning	L, N, PE, D1, D2
Hus farve inklusiv trækafastning	Sort

Model

	Forskruning
Tilslutning	skruetilslutning
Nominelt tværsnit leder	1,5 mm ²
Tæthedsklasse (IP)	IP66/68 (3m;2h) /IP69
Type på ledning	H05VV-F
Kabel farve	Sort
Kabeldiameter min.	9,8 mm
Kabeldiameter max.	10,4 mm
kabeltype	Hun / han
Type af konfektioneret kabel	tilslutningsledning
Kabelende version 1	hun
Kabelende version 2	Han





Skærmet	nej
---------	-----

Materiale



Overfladebehandling	forsølvet
Halogenfri	nej
Kontinuerlig temperatur på kabel	70 °C
Kontinuerlig temperatur, isolationsdele	100 °C
brand belastning	1,768 kWh
Brand klasse	Eca

Dimensioner

Total længde	2 m
--------------	-----

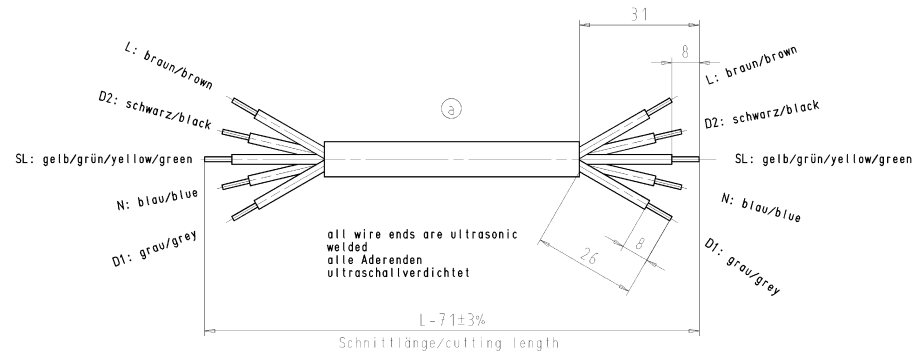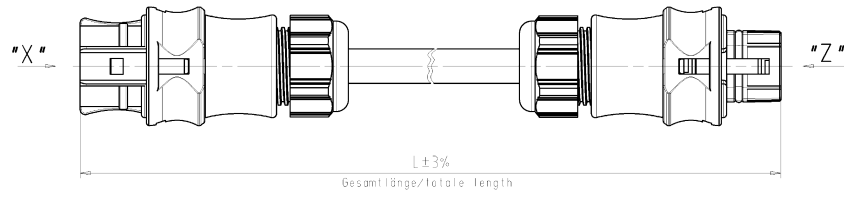

Kodierung/keying 4
(250V/50V/20A)



This drawing is the property of Wieland. It is not to be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage and retrieval system, without the prior written permission of Wieland.

Kabeltype/cable type H05VV-F5G1,5

Teile-Nr. part-no.	L	Beispiel (Farbe: türkisblau) example (colour: turquoiseblue)	Typ type
96.452.XX00.6	XX in dm-Schritten	96.452.1000.6 = 10dm/L= 1000mm	RST2015KSBS 15P 10TB04
U6.452.XX00.6	XX in m-Schritten	U6.452.1200.6 = 12 m/L=12000mm	RST2015KSBS 15P X12TB04
Tolerierung nach DIN 7187 Tolerance system acc. to DIN 7187. (Tolerances are given in mm unless otherwise stated.) This DIN standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances. (This DIN standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances.)			
Früher/nach former / later		200 - Zeichnung, keine Maßangaben 200 - drawing, no numerical dimensions	1 - Verwendung 1 - use
Werkstoff/Material 2000: Tag/Dat Name 31.07. Kneitz 1:1 Maßstab 1:1 Maßstab 1:1		Zeichnung Nr./Drawing No. 96.452.1000.6 01K a Made in mm/dimensions are in mm	
Ersatz für/Replacement for 96.452.1000.6 01K a		Type Benennung/Title KONFEKTLEITUNG ready made cable Schraubenschluß ohne Schutzblech/Screw connection without wire protection Artikelnummer/Part no. 96.452.1000.6	
Index 16.04.2012 16.04.2012 16.04.2012		Index 16.04.2012 16.04.2012 16.04.2012	
Änderung/Revision 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 M1 M2 M3 L G H		96452100001K_2_CAD/0208/1604/2012_04-16T02/02/1 01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20 M1 M2 M3 L G H	