



SL COMPACT

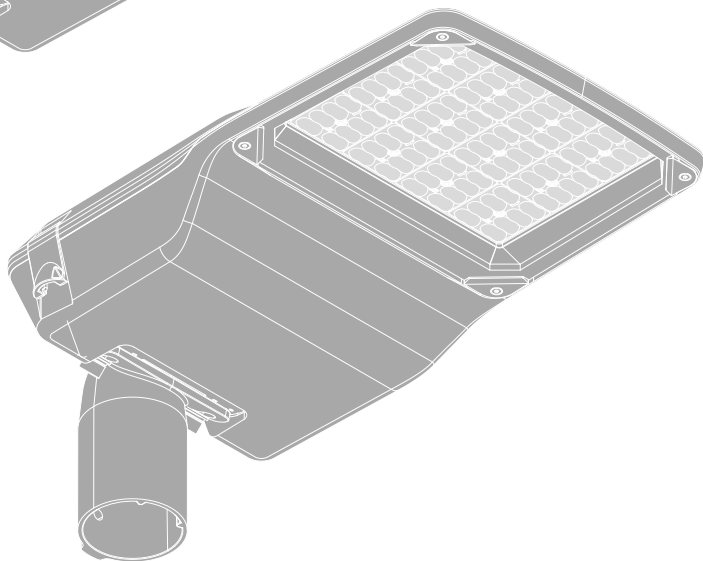

LEDVANCE

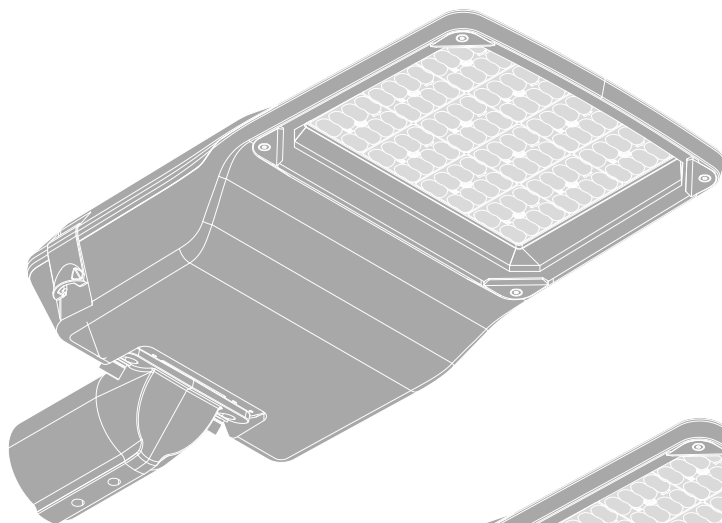

SL COMPACT




		W	l x w x h [mm]	K	VAC	Hz
ON/OFF		10-50	430 x 194 x 135	2700K 3000K 4000K	220-240	50/60
		55-90	455 x 210 x 133		220-240	50/60
		110-155	540 x 274 x 133		220-240	50/60
NEMA with shorting cup		10-50	430 x 194 x 189	2700K 3000K 4000K	220-240	50/60
		55-90	455 x 210 x 187		220-240	50/60
		110-155	540 x 274 x 187		220-240	50/60
NEMA Socket		10-50	430 x 194 x 156	2700K 3000K 4000K	220-240	50/60
		55-90	455 x 210 x 154		220-240	50/60
		110-155	540 x 274 x 154		220-240	50/60
ZHAGA Socket	Top	10-50	430 x 194 x 156	2700K 3000K 4000K	220-240	50/60
	Bottom		/		220-240	50/60
	Top and Bottom		/		220-240	50/60
	Top	55-90	455 x 210 x 154		220-240	50/60
	Bottom		455 x 210 x 133		220-240	50/60
	Top and Bottom		455 x 210 x 154		220-240	50/60
	Top	110-155	540 x 274 x 154		220-240	50/60
	Bottom		540 x 274 x 133		220-240	50/60
	Top and Bottom		540 x 274 x 154		220-240	50/60

SIZE	W	lm[max] 4000K	lm/w[max] 4000k
Small	10	1500	150
	21	3255	155
	25	3875	155
	30	4650	155
	40	6200	155
	50	7500	155
Medium	55	8800	160
	75*	12000	160
	90*	14400	160
Large	110	17600	160
	125	20000	160
	155	24025	155

*Driver BT MR-E


SL COMPACT





		W	IP	IK	▽	Ra	°(°C)	PF	👤
ON/OFF		10-50	66	08	RV40ST RU25ST RW20ST	>70	-40° .. +50°	>0,90*	2,8kg
		55-90	66	08		>70	-40° .. +50°	>0,95	3,4kg
		110-155	66	08		>70	-40° .. +50°	>0,95	4,9kg
NEMA with shorting cup		10-50	66	08	RV40ST RU25ST RW20ST	>70	-40° .. +50°	>0,90*	3,0kg
		55-90	66	08		>70	-40° .. +50°	>0,95	3,7kg
		110-155	66	08		>70	-40° .. +50°	>0,95	5,4kg
NEMA Socket		10-50	66	08	RV40ST RU25ST RW20ST	>70	-40° .. +50°	>0,90*	2,9kg
		55-90	66	08		>70	-40° .. +50°	>0,95	3,6kg
		110-155	66	08		>70	-40° .. +50°	>0,95	5,3kg
ZHAGA Socket	Top	10-50	66	08	RV40ST RU25ST RW20ST	>70	-40° .. +50°	>0,90*	3,2kg
	Bottom		66	08		>70	-40° .. +50°	>0,95	3,2kg
	Top and Bottom		66	08		>70	-40° .. +50°	>0,95	3,2kg
	Top	55-90	66	08		>70	-40° .. +50°	>0,95	3,5kg
	Bottom		66	08		>70	-40° .. +50°	>0,95	3,5kg
	Top and Bottom		66	08		>70	-40° .. +50°	>0,95	3,5kg
	Top	110-155	66	08		>70	-40° .. +50°	>0,95	5,3kg
	Bottom		66	08		>70	-40° .. +50°	>0,95	5,3kg
	Top and Bottom		66	08		>70	-40° .. +50°	>0,95	5,3kg

* - Description: For 10W version PF value to be confirmed with manufacturer.


SL COMPACT




SMALL

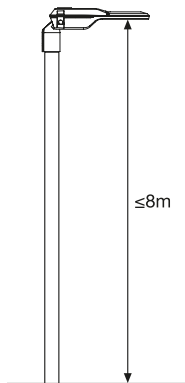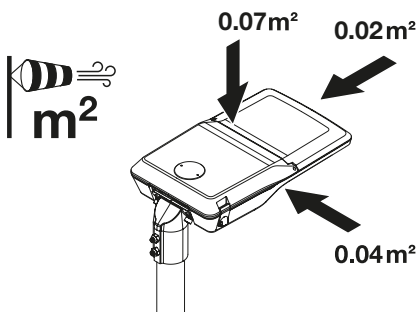


ON/OFF

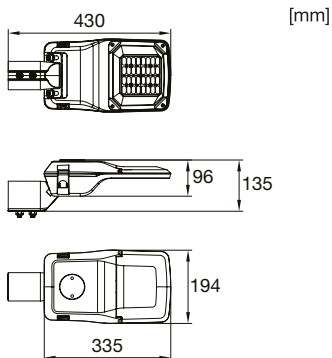


NEMA with shorting cap

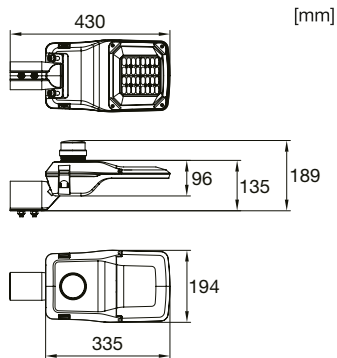


NEMA-Socket

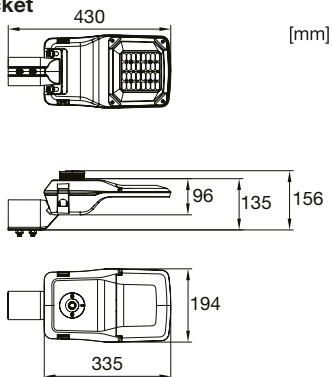


Zhaga Top

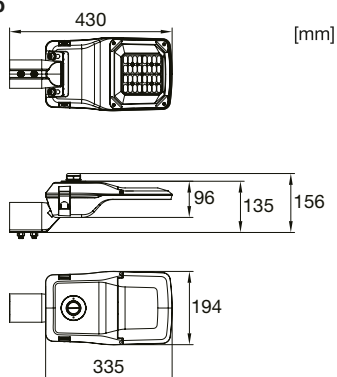





<p>MEDIUM</p>		
<p>ON/OFF [mm]</p>	<p>NEMA with shorting cap [mm]</p>	<p>NEMA-Socket [mm]</p>
<p>Zhaga Top [mm]</p>	<p>Zhaga Top and Bottom [mm]</p>	<p>Zhaga Bottom [mm]</p>


SL COMPACT




LARGE

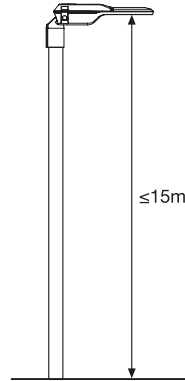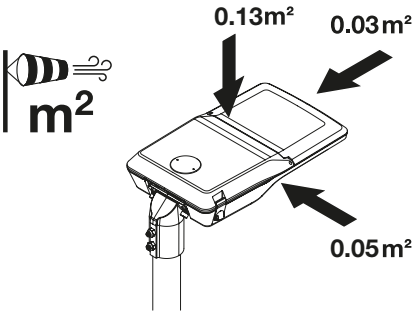


ON/OFF

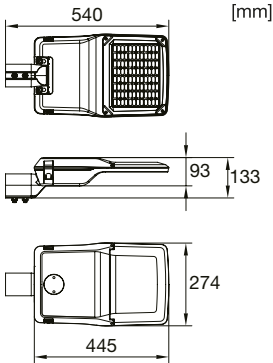


NEMA with shorting cap

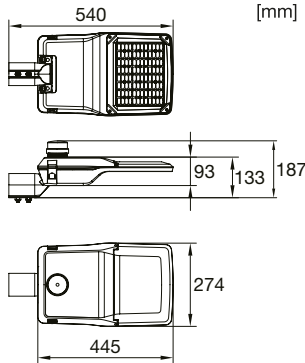


NEMA-Socket

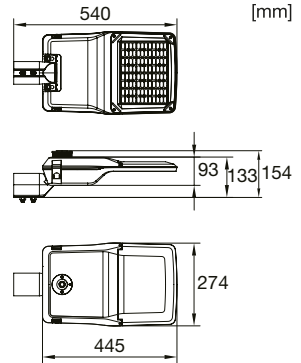


Zhaga Top



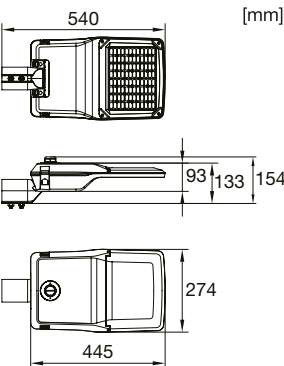







Zhaga Top and Bottom

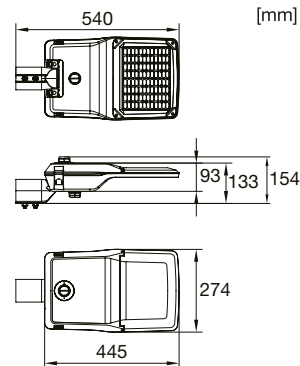










Zhaga Bottom

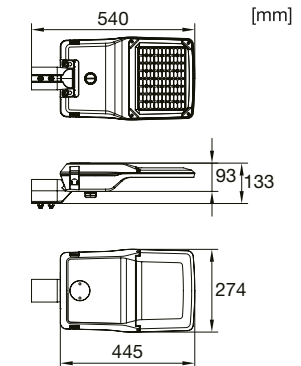


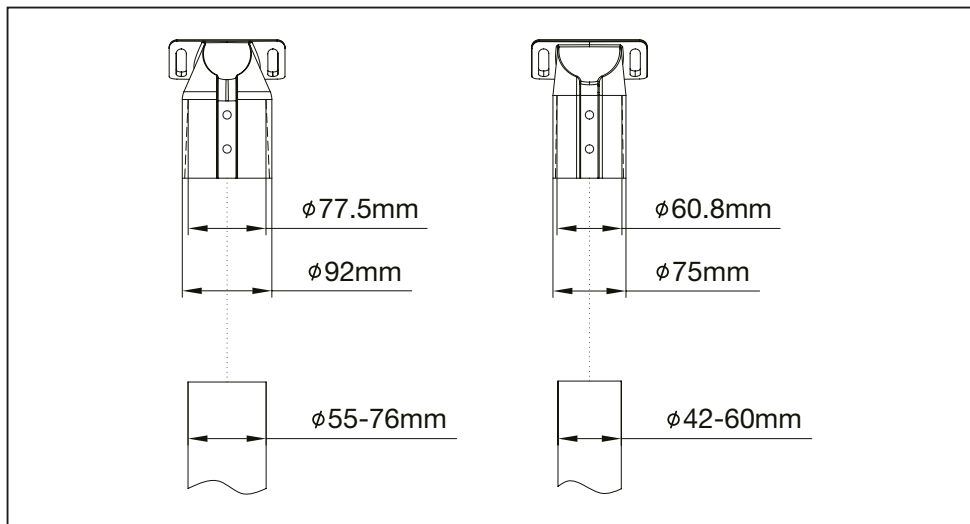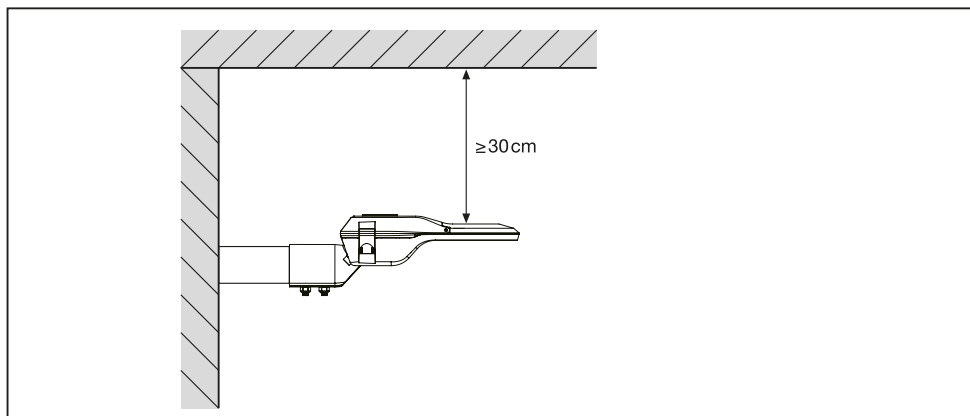

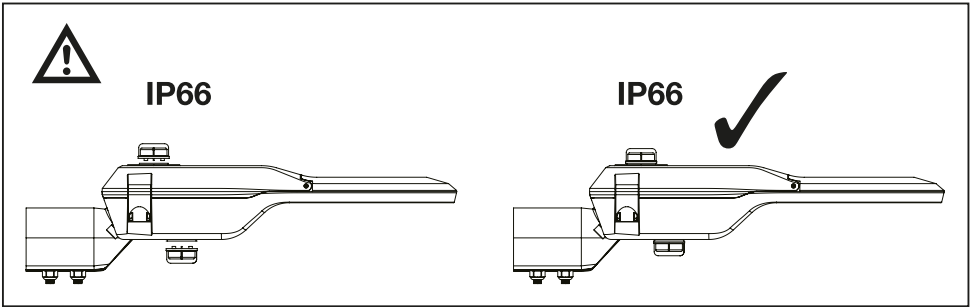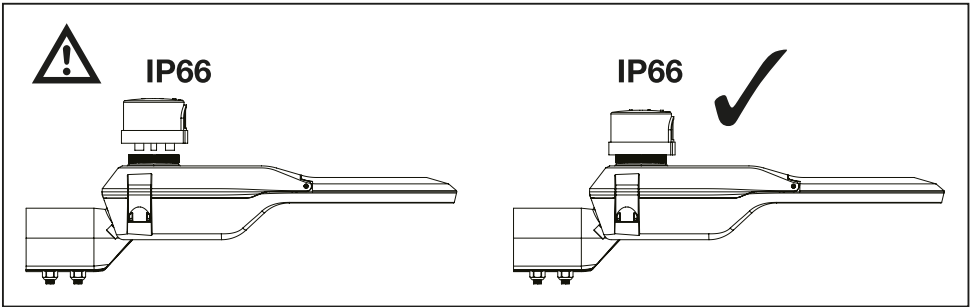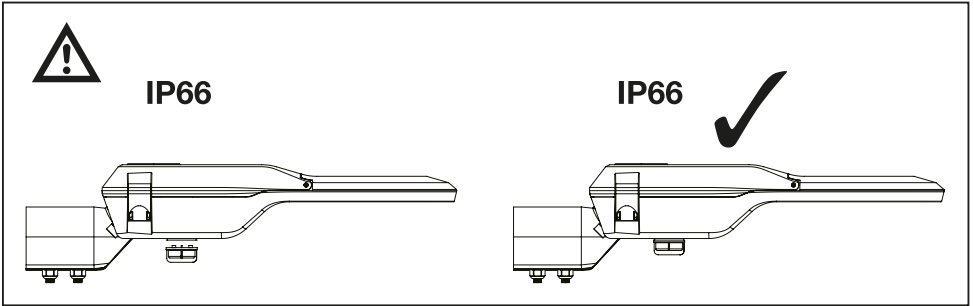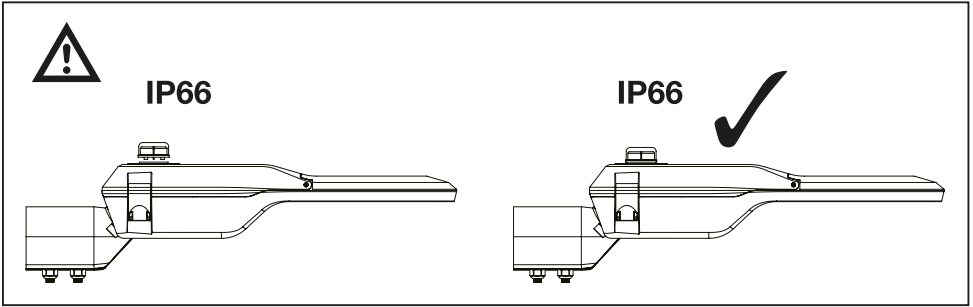


SL COMPACT

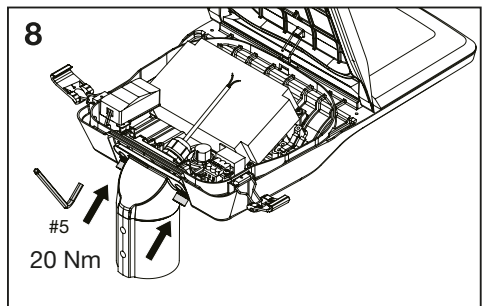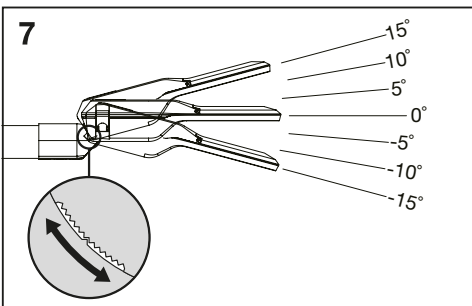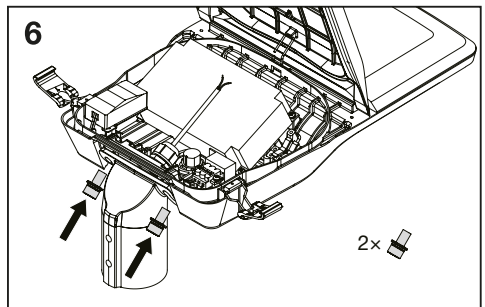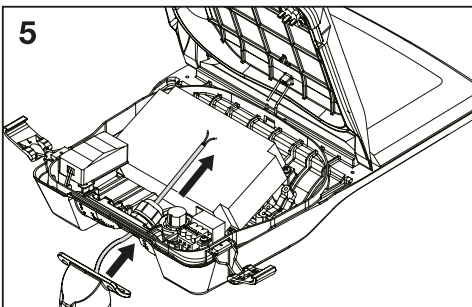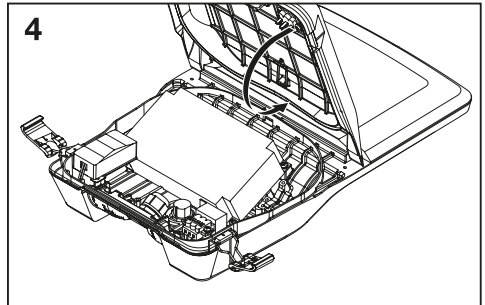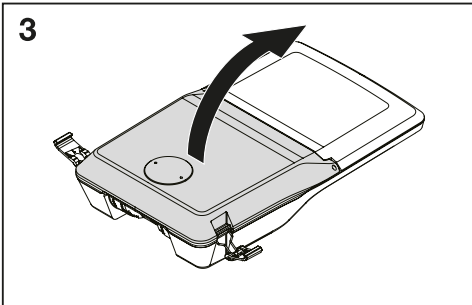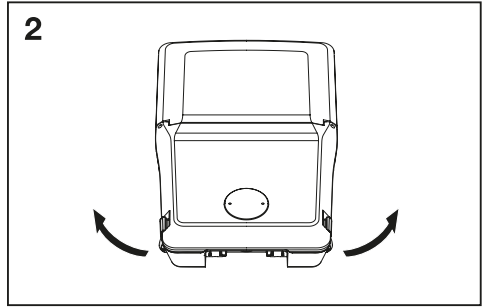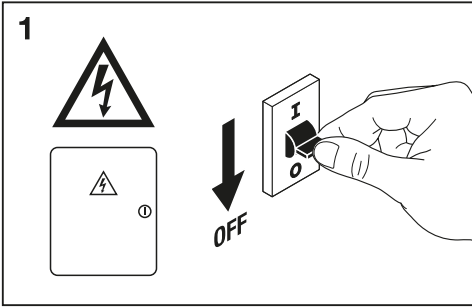






9











10

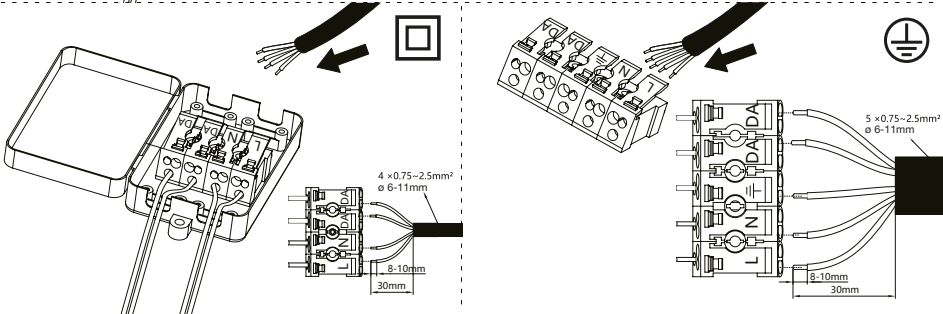
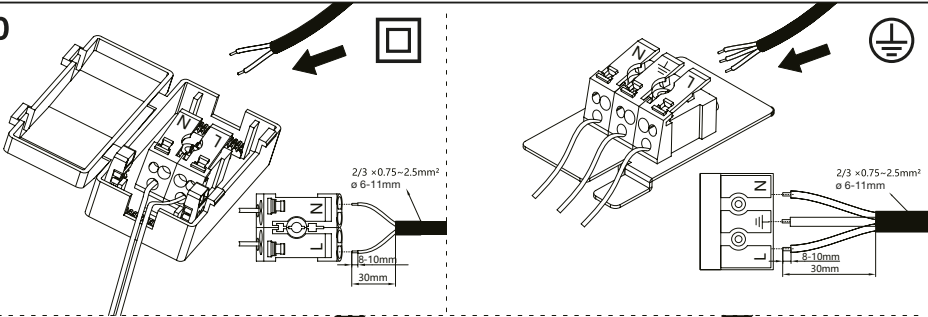


11

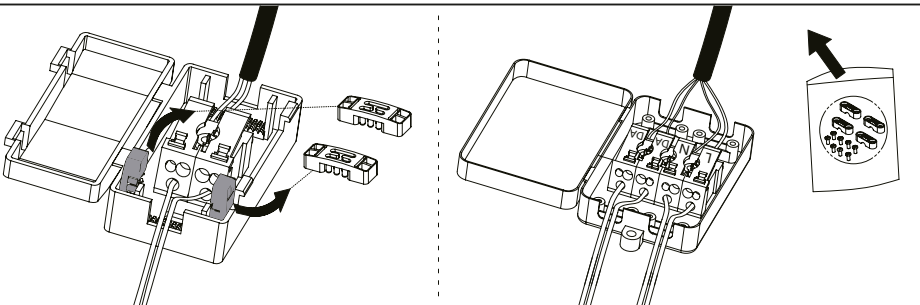

SL COMPACT

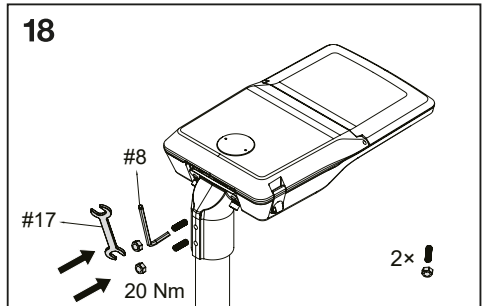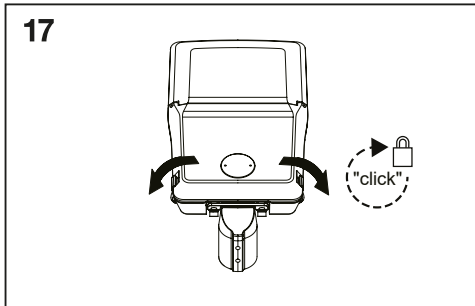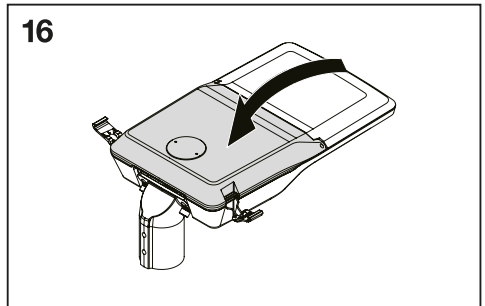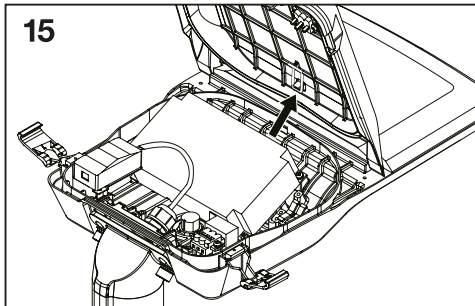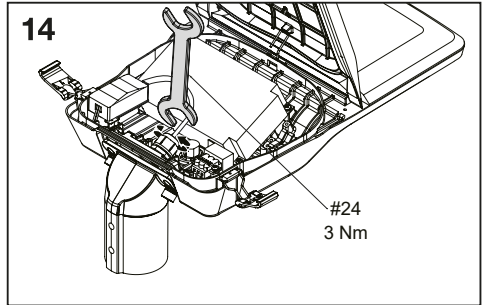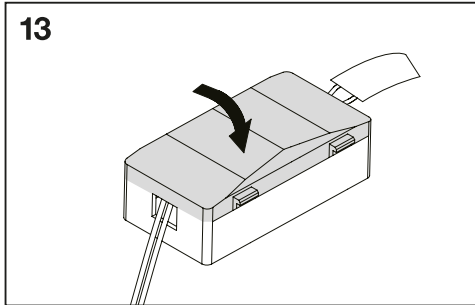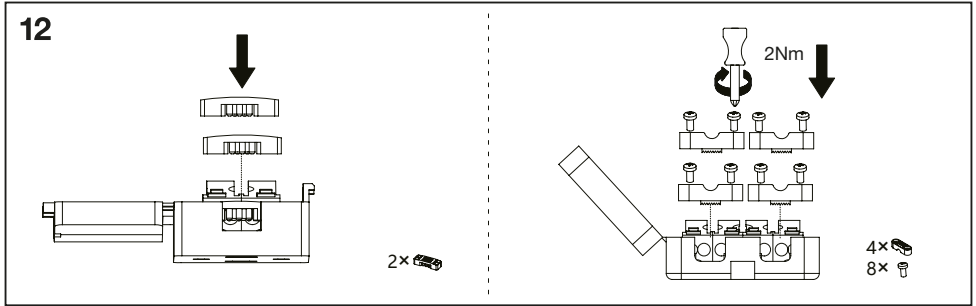


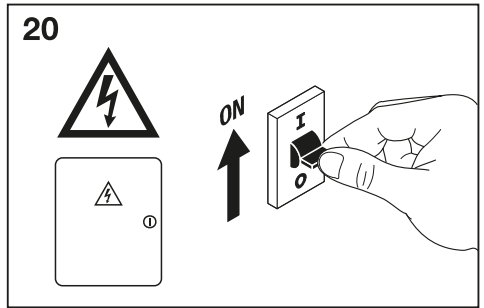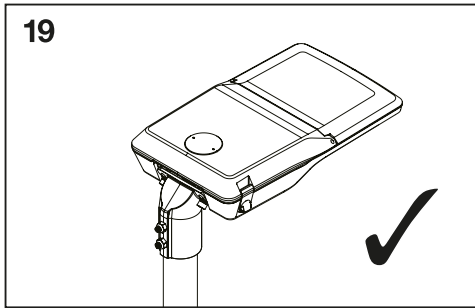

Model	Inrush current [A]	Th50 [us]	B10	B16	8B32	C10	C16	C32
SL SM 10W	28.2	280	7	9	18	8	14	28
SL SM 21W	30.6	260	7	8	16	8	13	26
SL SM 25W	32.2	260	6	8	16	7	12	24
SL SM 30W	32.6	280	6	7	15	7	12	24
SL SM 40W	35.0	220	7	9	19	8	13	27
SL SM 50W	35.8	208	8	10	21	9	14	28
SL SM 55W	36.2	260	6	7	14	6	11	22
SL SM 75W	59.6	190	5	6	12	5	8	17
SL SM 90W	67.8	160	5	7	14	5	9	18
SL SM 110W	55.6	300	3	4	8	4	6	12
SL SM 125W	55.6	320	3	4	8	4	6	12
SL SM 155W	56.4	300	3	4	8	3	6	12

- CLASS I

- CLASS II



PAP
Raccogli Carta
Verifica le disposizioni
del tuo comune.



LEDVANCE SASU
CQM, 5 rue d'Altorf
67120 Molsheim France
www.ledvance.com



FR
Cet appareil et
ses accessoires
se recyclent



Points de collecte sur www.quefairedemesdechets.fr

C10449057
G11260771
16.02.26

© LEDVANCE Ltd, Sterling House,
810 Mandarin Court, Warrington,
Cheshire, WA1 1GG, United Kingdom