

Datablad

Art. Nr. 96.452.5000.6

Konfektioneret kabel RST20i5KSBS 15P 50TB0

RST20i5 5-pol mellemkabel han/hun længde: 5M. Kodefarve: turkis. Kapslingsklasse: IP69. Kabel: H05VV-F, kvadrat: 1,5mm²
kabelfarve: sort



Art. Nr.	96.452.5000.6
EAN	4015573941816
Ordre enhed	10 styk

Godkendelser



Specifikationer

Note

Note	
------	--

Generelt

Nominal strøm	16 A
Nominal spænding	250 V
Nominal impuls spænding	4 kV
Forureningsgrad	3
Kontakt modstand	58,1 mOhm
låsbar	
Farve på kodning/kontaktindsats	turkisblå
Pol mærkning	L, N, PE, D1, D2
Hus farve inklusiv trækafastning	Sort

Model

	Forskruning
Tilslutning	skruetilslutning
Nominelt tværsnit leder	1,5 mm ²
Tæthedsklasse (IP)	IP66/68 (3m;2h) /IP69
Type på ledning	H05VV-F
Kabel farve	Sort
Kabeldiameter min.	9,8 mm
Kabeldiameter max.	10,4 mm
kabeltype	Hun / han
Type af konfektioneret kabel	tilslutningsledning
Kabelende version 1	hun
Kabelende version 2	Han





Skærmet	nej
---------	-----

Materiale



Overfladebehandling	forsølvet
Halogenfri	nej
Kontinuerlig temperatur på kabel	70 °C
Kontinuerlig temperatur, isolationsdele	100 °C
brand belastning	3,55 kWh
Brand klasse	Eca

Dimensioner

Total længde	5 m
--------------	-----

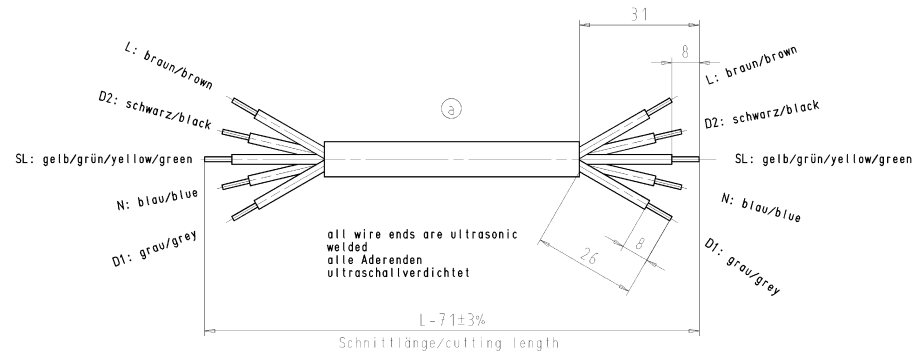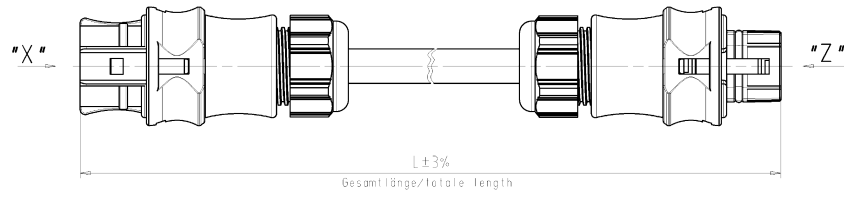

Kodierung/keying 4
(250V/50V/20A)



This drawing is a technical drawing of a cable assembly. It is not a photograph. The representation and dimensions of the object are not to scale. The drawing is a technical drawing of a cable assembly.

Kabeltype/cable type H05VV-F5G1,5

Teile-Nr. part-no.	L	Beispiel (Farbe: türkisblau) example (colour: turquoiseblue)	Typ type
96.452.XX00.6	XX in dm-Schritten	96.452.1000.6 = 10dm/L= 1000mm	RST2015KSBS 15P 10TB04
U6.452.XX00.6	XX in m-Schritten	U6.452.1200.6 = 12 m/L=12000mm	RST2015KSBS 15P X12TB04
Tolerierung nach DIN 7187 Tolerance system acc. to DIN 7187. Tolerances: see Data sheet. This DIN standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances.			
Früher/nach former / later		200 - Zeichnung, keine Maßangaben 200 - drawing, no numerical dimensions	1 - Verwendung 1 - use
Werkstoff/Material 2000: Tag/Dat Name 31.07. Kneitz 1:1 Maßstab 1:1 Maßstab 1:1		Zeichnung Nr./Drawing No. 96.452.1000.6 01K a Made in m/dimensions are in mm	
mw 01./501. mw 01./501. mw 01./501.		Ersatz für/Replacement for: Type Benennung/Title KONFEKTLEITUNG ready made cable Schraubenschluß ohne Schutzblech/Thread connection without wire protection Kodierung/Keying: 4 (250V/50V/20A)	
16.04.2017 16.04.2017 16.04.2017		16.04.2017 16.04.2017 16.04.2017	
Änderung/Revision 1 2 3		1 2 3	

96452100001K_2_04000205.indd 2002 - 04 - 0710:10:31 1000