

Datablad

Art. Nr. 96.452.5004.6

Konfektioneret kabel RST20i5KS-S 15P 50TB0

RST20i5 5-pol tilslutningskabel han/fri ende længde: 5M.
 Kodefarve: turkis. Kapslingsklasse: IP69. Kabel: H05VV-F, kvadrat:
 1,5mm² kabelfarve: sort



Art. Nr.	96.452.5004.6
EAN	4015573941977
Ordre enhed	10 styk

Godkendelser

Specifikationer
Note

Note	
------	--

Generelt

Nominel strøm	16 A
Nominel spænding	250 V
Nominel impuls spænding	4 kV
Forureningsgrad	3
Kontakt modstand	57,55 mOhm
låsbar	
Farve på kodning/kontaktindsats	turkisblå
Pol mærkning	L, N, PE, D1, D2
Hus farve inklusiv trækafkastning	Sort

Model

	Forskruning
Tilslutning	skruetilslutning
Nominelt tværsnit leder	1,5 mm ²
Tæthedsklasse (IP)	IP66/68 (3m;2h) /IP69
Afisoleringslængde	9 mm
Afisoleringslængde	35 mm
Forberedelse af lederenderne	ultrasonisk svejset ledningsender
Type på ledning	H05VV-F
Kabel farve	Sort
Kabeldiameter min.	9,8 mm
Kabeldiameter max.	10,4 mm
kabeltype	han - fri ende



Type af konfektioneret kabel	Tilslutningskabel
Kabelende version 1	fri ende
Kabelende version 2	Han
Skærmet	nej

Materiale

Overfladebehandling	forsølvet
Halogenfri	nej
Kontinuerlig temperatur på kabel	70 °C
Kontinuerlig temperatur, isolationsdele	100 °C
brand belastning	3,258 kWh
Brand klasse	Eca

Dimensioner


Total længde	5 m
--------------	-----

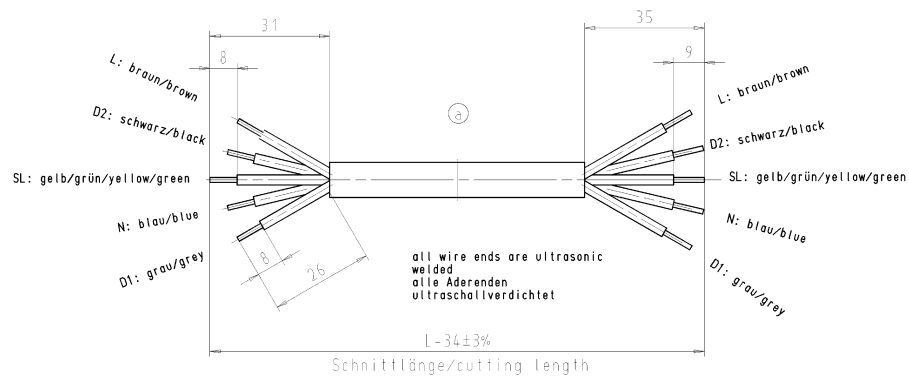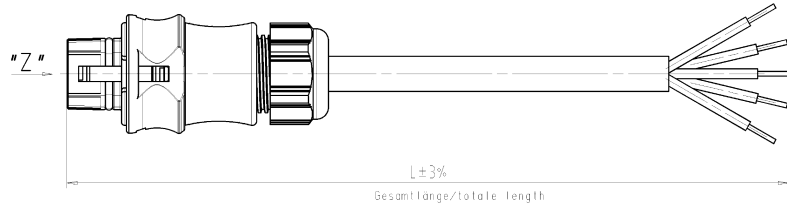

Kabeltype/cable type H05VV-F5G1,5

Kodierung/keying 4
(250V/50V/20A)

"Z"



These dimensions will be respected by default in delivery
 These dimensions will be respected in delivery
 These dimensions will be respected in delivery

These dimensions will be respected in delivery
 These dimensions will be respected in delivery
 These dimensions will be respected in delivery

Wieland and its subsidiaries are ISO 9001:2015 certified. Wieland and its subsidiaries are ISO 14001:2015 certified. Wieland and its subsidiaries are ISO 45001:2018 certified. The reproduction, distribution and circulation of this document is only permitted in accordance with the terms of the Wieland Group's data protection policy.

Teile-Nr. part-no.	L	Beispiel (Farbe: türkisblau) example (colour: turquoiseblue)	Typ type
96.452.XX04.6	XX in dm-Schritten	96.452.1004.6 = 10dm/L= 1000mm	RST2015KS-S 15P 10TB04
U6.452.XX04.6	XX in m-Schritten	U6.452.1204.6 = 12 m/L=12000mm	RST2015KS-S 15P X12TB04
<p>Herstellung nach DIN 7157/Tolerance system acc. to DIN 7157. (This DIN standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances.)</p> <p>Herstellung nach DIN 7157/Tolerance system acc. to DIN 7157. (This DIN standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances.)</p>			
Früher/nach former/previous		200 - Zeichnung, keine Maßangaben 200 - drawing, no numerical specifications of size	1 - Verwendung: First Use
Werkstoff/Material		2000 Tagelatz 2000 Tagelatz	Zeichnung Nr./Drawing No.
Maßstab Scale		31,39 31,39	96.452.1004.6 01K a
Vergrößerung Magnification		1:1	Made in mm/dimensions are in mm
Wahl Selection		01L/501L	Ersatz für/Replacement for
Wieland		Wieland	Benennung/Title
Änderung/Revision		03.04.2017	KONFEKTLEITUNG
		Index	ready made cable
		Änderung/Revision	Schraubenschluß ohne Schutzblech/2-terminal connection without wire protection
			Kodierung/Keying: 4 (250V/50V/20A)

96452100401K_2_CAD/0208.indd 2002 - 04-23T13:03:13 1000