

Datablad

Art. Nr. 96.452.7000.6

Konfektioneret kabel RST20i5KSBS 15P 70TB0

 RST20i5 5-pol mellemkabel han/hun længde: 7M. Kodefarve: turkis. Kapslingsklasse: IP69. Kabel: H05VV-F, kvadrat: 1,5mm² kabelfarve: sort


Art. Nr.	96.452.7000.6
EAN	4015573941830
Ordre enhed	5 styk

Godkendelser

Specifikationer
Note

Note	
------	--

Generelt

Nominel strøm	16 A
Nominel spænding	250 V
Nominel impuls spænding	4 kV
Forureningsgrad	3
Kontakt modstand	80,9 mOhm
låsbar	
Farve på kodning/kontaktindsats	turkisblå
Pol mærkning	L, N, PE, D1, D2
Hus farve inklusiv trækafkastning	Sort

Model

	Forskruning
Tilslutning	skruetilslutning
Nominelt tværsnit leder	1,5 mm ²
Tæthedsklasse (IP)	IP66/68 (3m;2h) /IP69
Type på ledning	H05VV-F
Kabel farve	Sort
Kabeldiameter min.	9,8 mm
Kabeldiameter max.	10,4 mm
kabeltype	Hun / han
Type af konfektioneret kabel	tilslutningsledning
Kabelende version 1	hun
Kabelende version 2	Han





Skærmet	nej
---------	-----

Materiale


Overfladebehandling	forsølvet
Halogenfri	nej
Kontinuerlig temperatur på kabel	70 °C
Kontinuerlig temperatur, isolationsdele	100 °C
brand belastning	4,738 kWh
Brand klasse	Eca

Dimensioner

Total længde	7 m
--------------	-----

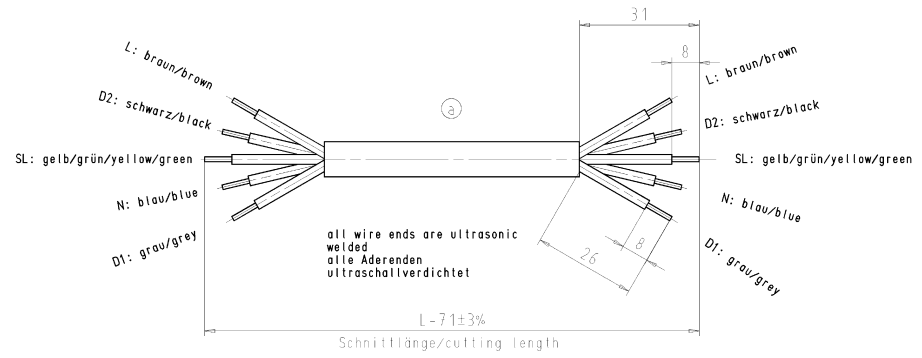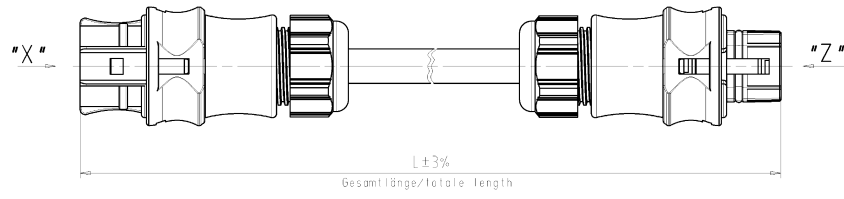

Kodierung/keying 4
(250V/50V/20A)



This drawing is the property of Wieland. It is not to be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage and retrieval system, without the prior written permission of Wieland.

Kabeltype/cable type H05VV-F5G1,5

Teile-Nr. part-no.	L	Beispiel (Farbe: türkisblau) example (colour: turquoiseblue)	Typ type
96.452.XX00.6	XX in dm-Schritten	96.452.1000.6 = 10dm/L= 1000mm	RST2015KSBS 15P 10TB04
U6.452.XX00.6	XX in m-Schritten	U6.452.1200.6 = 12 m/L=12000mm	RST2015KSBS 15P X12TB04
Tolerierung nach DIN 7187 Tolerance system acc. to DIN 7187. Tolerances: see Data sheet table 10-10K40/03 1st edition. This DIN standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances. Conformity with Wieland document 10-10K-05/03 (list of prohibited / acceptable tolerances) to be observed!			
Früher/nach former / later		200 - Zeichnung, keine Maßangaben 200 - drawing, no numerical specifications	1 - Verwendung 1 - use
Werkstoff/Material 2000: Tag/Dat Name 31.07. Kneitz 1:1 Made in m/dimensions are in mm		Zeichnung Nr./Drawing No. 96.452.1000.6 01K a	
Index 16.04.2012 16.04.2012 16.04.2012		Type Benennung/Title KONFEKTLEITUNG ready made cable Schraubenschluß ohne Schutzblech/without wire protection without wire protection	
Änderung/Revision 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 M1 M2 M3 L G H		96452100001K_2_CASNO2015_KM4_2012_04-16T021621 1000 04-PEM-08/91	