

LARA VARIOFLEX LED IP65



- | | |
|-------------------------------------|---------------------------------------|
| EN Installation Instructions | IT Istruzioni di montaggio |
| DE Montageanleitung | LT Montavimo Instrukcijos |
| CZ Montážní návod | LV Instalācijas instrukcija |
| DK Monteringsvejledning | NO Monteringsanvisning |
| EE Paigaldusjuhend | PL Instrukcja montażu |
| FI Asennusohje | SE Installationsanvisning |
| FR Notice de montage | RU Инструкция по монтажу |
| HU Szerelési útmutató | SRB Instrukcija za instalaciju |
| HR Uputstvo za montažu | SK Montážny návod |
| NL Montagehandleiding | SLO Navodilo za montažo |
| RO Instructiuni de montaj | CN 安装说明书 |


- ⚠ 1. Installation and commissioning may only be carried out by authorized specialists and wired in cordance with the latest IEE electrical regulations or the national standards.
 2. Mains power must be switched off before carrying out installation.
 3. The manufacturer shall not be liable for any damage resulting from inappropriate modifications to the luminaire or faulty installation.
 4. This luminaire contains a light source of energy efficiency class <D>.
 5. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
 6. The control gear provides basic insulation between the LV supply and the control circuit

SAP Code	Product Description	Lumen	Height (H)	Diameter (D)
96635284	LARA VARIOFLEX 250 1200 830/35/40	1200lm: 100/85/65%	75	Ø250
96635285	LARA VARIOFLEX 250 1200 830/35/40 MWS	1200lm: 100/85/65%	75	Ø250
96635286	LARA VARIOFLEX 300 2200 830/35/40	2200lm: 100/80/50%	75	Ø300
96635287	LARA VARIOFLEX 300 2200 830/35/40 MWS	2200lm: 100/80/50%	75	Ø300
96635288	LARA VARIOFLEX 250 1200 BEZEL TRIM WH	800lm: 100/85/65%	75	Ø255
96635289	LARA VARIOFLEX 250 1200 MWS BEZEL TRIM WH	800lm: 100/85/65%	75	Ø255
96635290	LARA VARIOFLEX 300 2200 BEZEL TRIM WH	1800lm: 100/80/50%	75	Ø305
96635291	LARA VARIOFLEX 300 2200 MWS BEZEL TRIM WH	1800lm: 100/80/50%	75	Ø305

SAP Code	Optional accessory - E3 Kit	Size(mm)
96635292	LARA/SARA E3 Kit SelfTest LiFePo4	108x63x23mm

SAP Code	Optional accessory - Trim	Size (diameter)	Trim colour
96635293	LARA/SARA BEZEL TRIM 250 WH	Ø255	White
96635294	LARA/SARA BEZEL TRIM 250 BK	Ø255	Black
96635295	LARA/SARA EYELID TRIM 250 WH	Ø255	White
96635296	LARA/SARA EYELID TRIM 250 BK	Ø255	Black
96635297	LARA/SARA BEZEL TRIM 300 WH	Ø305	White
96635298	LARA/SARA BEZEL TRIM 300 BK	Ø305	Black
96635299	LARA/SARA EYELID TRIM 300 WH	Ø305	White
96635300	LARA/SARA EYELID TRIM 300 BK	Ø305	Black

1	x1
2	x3
3	x3
4	x3

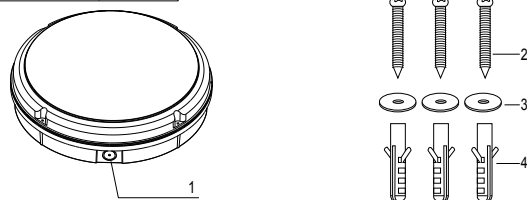

LARA VARIOFLEX LED

1 ⚠ OFF

2

3

4 TOP X3

5 0.5-2.5mm² 5-7mm

E3 SAP 96635292

CONNECT BATTERY (Ensure that emergency supply is continuous.)
 Check if LED indicator is working properly.
 Installer to add date of Installation onto battery.

LiFePO4 3.2V 3.2Ah


LED <3h

6

TRIM Clip on the trim.



7 ON

MWS




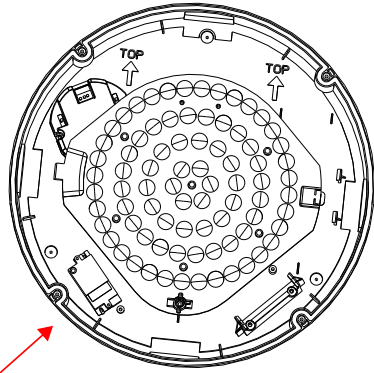


Detection Area		Hold Time		Stand-by Period		Daylight Sensor		Movement	
1	2	3	4	5	6	7	8	9	10
ON 100%	ON ON	5S	ON ON	0S	ON ON	5Lux	ON ON	ON	ON
- 50%	- ON	5min	- ON	5min	- ON	100Lux	ON	ON	ON
	ON	15min	ON	15min	ON	200Lux	-	OFF	
	-	30min	-	+∞	-	Disable			

Default/Défaut

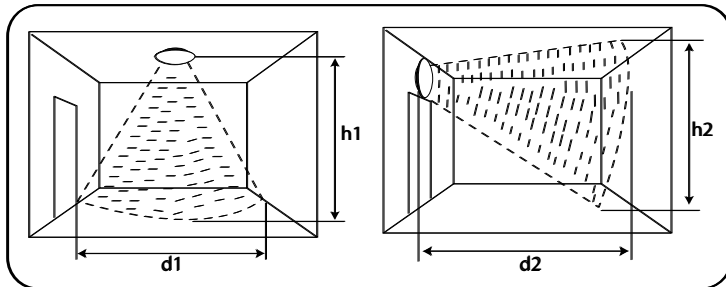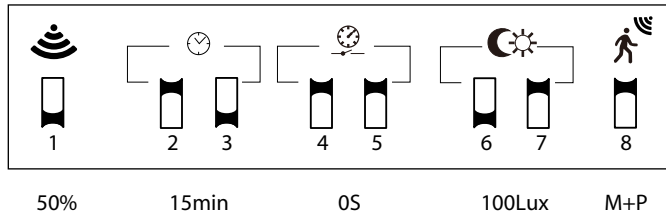

	h1	d1	h2	d2
100%	3m	10m	2m	6m
50%	3m	6m	2m	3m

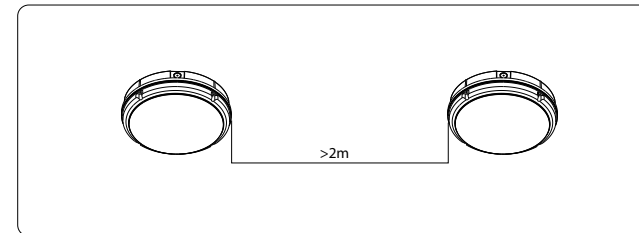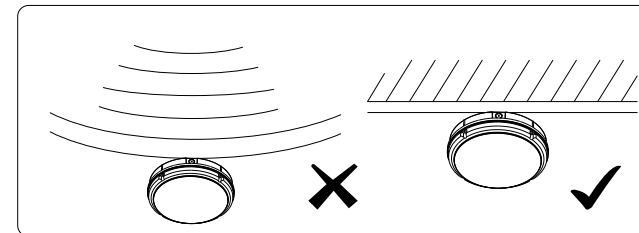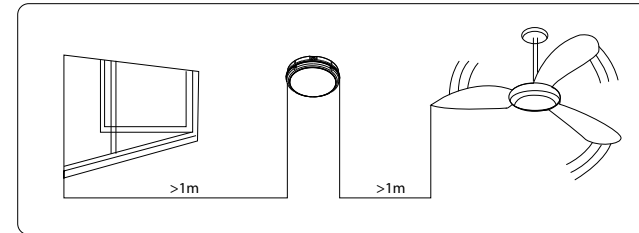

Information on replaceability:



UK CA CE EAC

