


LED converter 1.000 mA, DALI dimmable (digital)

Article no. 17836010

Light.
For Generations.

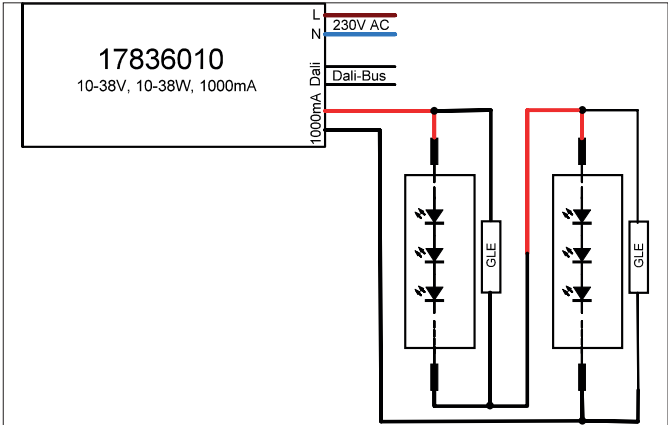

Tender

LED converter 1.000 mA, DALI dimmable (digital), white, Rectangular.This driver fulfills the requirements for safety lighting systems in accordance with DIN EN 50172 VDE 0108-100:2005-01. This converter is equipped with safety devices which protect it against overvoltage, short-circuit as well as thermal and electric overloads. The input and output terminals are suitable for cables with a cross-section of up to 0.75-1.5 mm². Material: Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Current: 1.000 mA, Voltage: 230V AC 50Hz , Power: 38 W, Dimmable: Yes, Control: DALI-2 .

Article data	
Article no.	17836010
GTIN	4251433924210
Short description	LED converter 1.000 mA, DALI dimmable (digital)
Material	Plastic
Colour	White
Shape	Rectangular
Length	146 mm
Width	44 mm
Hight	30 mm
Weight	0.136 kg
stamp	ENEC 05, MM, EL

LED converter 1.000 mA, DALI dimmable (digital)

Article no. 17836010

Light.
For Generations.

Operating technology of driver	
AC nominal voltage min	198 V
AC nominal voltage max	264 V
Frequency min	50 Hz
Frequency max	60 Hz
DC nominal voltage min	176 V
DC nominal voltage max	275 V
Protection class	II
Degree of protection	IP20
Power min	10 W
Power max.	38 W
Output_ripple_current	3
Starting current	5A 50µs
Suitable for emergency lighting	No
measure point (tc)	85 °C
Version	without
Power factor	0.95
Output voltage max	38.00 V
Output voltage min.	10.00 V
Control	DALI-2
Number of poles	4
Enviroment temprature (ta)	-25 °C up to +45 °C
Measure point (tc)	max. +85 °C
Output current	1.000 mA

Packing data	
Gross weight	0.14 kg
Length of packaging	45 mm
Packaging width	35 mm
Packaging hight	190 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>