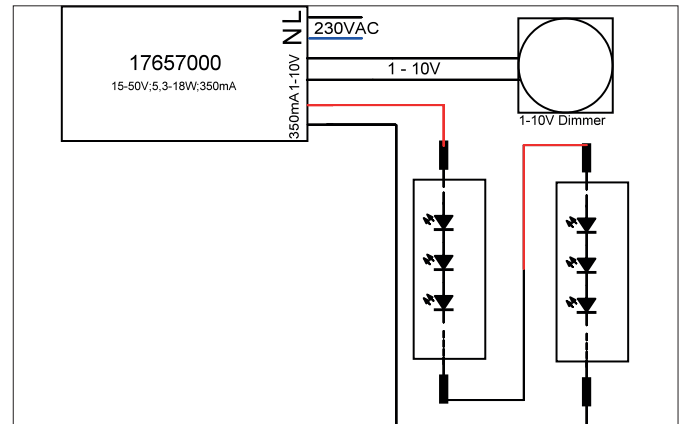


LED converter 350 mA, 1-10 V dimmable (analog)

Article no. 17657000

Light.
For Generations.**Tender**

LED converter 350 mA, 1-10 V dimmable (analog), white, Rectangular. This converter is equipped with safety devices which protect it against overvoltage, short-circuit as well as thermal and electric overloads. The input and output terminals are suitable for cables with a cross-section of up to 1.5 mm². Material: Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Current: 350 mA, Voltage: 230V AC 50Hz, Power: 18 W, Dimmable: Yes, Control: 1-10 V.

Article data	
Article no.	17657000
GTIN	4251433923954
Short description	LED converter 350 mA, 1-10 V dimmable (analog)
Material	Plastic
Colour	White
Shape	Rectangular
Length	110 mm
Width	52 mm
Height	22 mm
Scope of delivery	Plug&Play-Ausgangsleitung, Länge 110 mm
Weight	0.112 kg
stamp	ENEC 05, MM, EL
Conformance	CE

LED converter 350 mA, 1-10 V dimmable (analog)

Article no. 17657000

Light.
For Generations.

Operating technology of driver	
AC nominal voltage min	99 V
AC nominal voltage max	264 V
Frequency min	50 Hz
Frequency max	60 Hz
DC nominal voltage min	176 V
DC nominal voltage max	280 V
Protection class	II
Degree of protection	IP20
Power min	5.2 W
Power	18 W
Output_ripple_current	3
Starting current	5A 50µs
Suitable for emergency lighting	No
measure point (tc)	80 °C
Version	Plug&Play
Power factor	0.95
max. no. lights on B16 A	50
Output voltage max	50.00 V
Output voltage min.	15.00 V
Flicker value Pst LM	1.00
Control	1-10 V
Number of poles	4
Environment temperature (ta)	-25 °C up to +50 °C
Measure point (tc)	max. +80 °C
Output current	350 mA

Packing data	
Gross weight	0.131 kg
Length of packaging	60 mm
Packaging width	27 mm
Packaging height	150 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.