


LED converter 350 mA, trailing-edge phase dimmable

Article no. 17648000

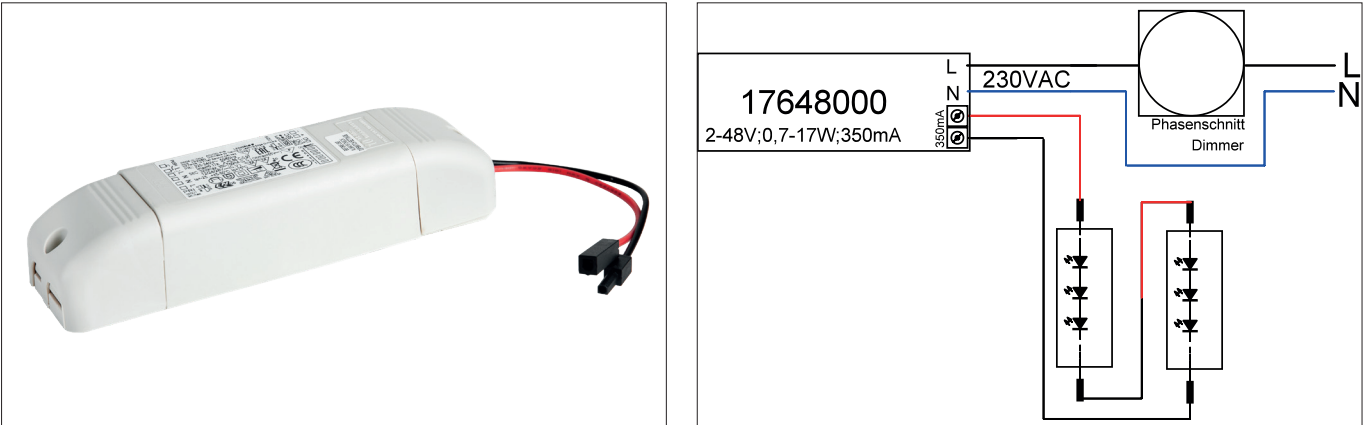

Tender

LED converter 350 mA, trailing edge dimmable, white, rectangular. This operating device meets the requirements for safety lighting systems in accordance with DIN EN 50172 VDE 0108-100:2005-01. This converter is protected against overvoltage and short-circuit as well as thermal and electrical overload by fuses. The input and output terminals are suitable for cables with a cross-section of up to 1.5 mm².

Material: Plastic, Protection class on room side: according to DIN EN 60529: IP20, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 17 W, Dimmable: Yes, Type of dimming: Phase cut-off.

Article data	
Article no.	17648000
GTIN	4251433924555
Short description	LED converter 350 mA, trailing-edge phase dimmable
Material	Plastic
Colour	White
Shape	Rectangular
Length	166 mm
Width	46 mm
Hight	34 mm
Scope of delivery	Plug&Play-Ausgangsleitung, Länge 110 mm
Weight	0.183 kg
stamp	ENEC 05, MM
Conformance	CE

LED converter 350 mA, trailing-edge phase dimmable

Article no. 17648000

Operating technology of driver	
AC nominal voltage min	198 V
AC nominal voltage max	264 V
Frequency min	50 Hz
Frequency max	60 Hz
Protection class	II
Degree of protection	IP20
Power min	0.7 W
Power	17 W
Output_ripple_current	3
Starting current	5 A, 50 µs
Suitable for emergency lighting	No
measure point (tc)	75 °C
Version	Plug&Play
Power factor	0.97
max. no. lights on B16 A	50
Output voltage max	47.00 V
Output voltage min.	2.00 V
Control	Trailing-edge phase
Number of poles	2
Environment temperature (ta)	-25 °C up to +50 °C
Measure point (tc)	max. +75 °C
Output current	350 mA

Packing data	
Gross weight	0.246 kg
Length of packaging	140 mm
Packaging width	110 mm
Packaging height	120 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>