
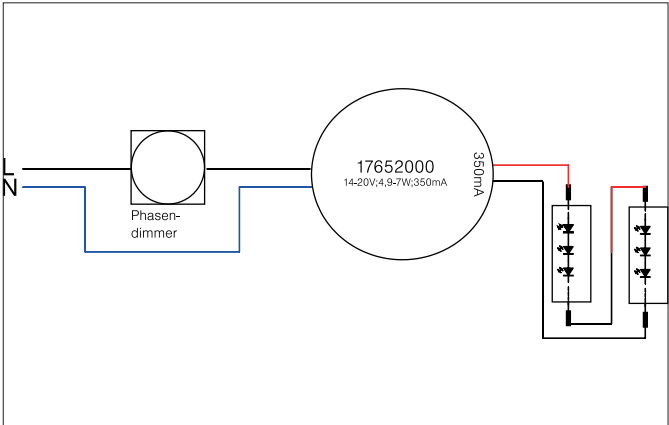


LED-round converter 350 mA, trailing-edge phase dimmer
Article no. 17652000

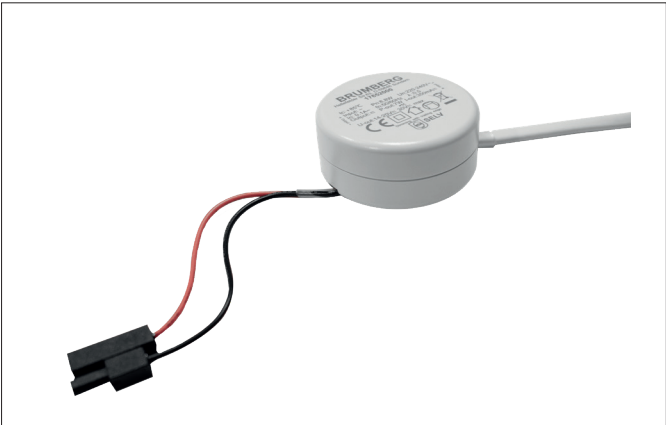

| Tender | |
|--|--|
| LED round converter 350 mA, trailing edge dimmable, white, round. Version: Plug&Play, Material: Plastic, Protection rating on room side: to DIN EN 60529: IP20, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 7 W, Dimmable: Yes, Type of dimming: Trailing edge phase control. | |

| Article data | |
|-------------------------------|--|
| Article no. | 17652000 |
| GTIN | 4251433916581 |
| Short description | LED-round converter 350 mA, trailing-edge phase dimmer |
| Material | Plastic |
| Colour | White |
| Shape | Round |
| Outer diameter | 51 mm |
| Hight | 24 mm |
| Scope of delivery | Plug&Play-Ausgangsleitung, Länge 110 mm |
| Weight | 0.047 kg |
| Length of the connection line | 110 mm |
| Conformance | CE |

LED-round converter 350 mA, trailing-edge phase dimmer

Article no. 17652000

| Operating technology of driver | |
|---------------------------------|---------------------|
| AC nominal voltage min | 200 V |
| AC nominal voltage max | 264 V |
| Frequency min | 50 Hz |
| Frequency max | 60 Hz |
| Protection class | II |
| Degree of protection | IP20 |
| Power min | 4.9 W |
| Power max. | 7 W |
| Starting current | 3 A, 100 µs |
| Suitable for emergency lighting | No |
| measure point (tc) | 85 °C |
| Version | Plug&Play |
| Power factor | 0.5 |
| Output voltage max | 20.00 V |
| Output voltage min. | 14.00 V |
| Control | Trailing-edge phase |
| Number of poles | 2 |
| Flicker-free | Yes |
| Environment temperature (ta) | -20 °C bis +50 °C |
| Measure point (tc) | max. +85 °C |
| Average nominal lifespan | 30000 h |
| Output current | 350 mA |
| Length of the connection line | 110 mm |

| Packing data | |
|-------------------------|--|
| Gross weight | 0.063 kg |
| Length of packaging | 70 mm |
| Packaging width | 47 mm |
| Packaging height | 81 mm |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |