
LED round converter 350 mA, DALI dimmable (digital)

Article no. 17658010



Light. For Generations.



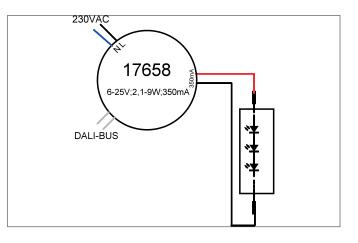



Tender

LED round converter 350 mA, DALI dimmable (digital), white, Round. This converter is equipped with safety devices which protect it against overvoltage, short-circuit as well as thermal and electric overloads. Material: Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Current: 350 mA, Voltage: 230V AC 50Hz, Power: 9 W, Dimmable: Yes, Control: DALI-2 .

Article data	
Article no.	17658010
GTIN	4251433949015
Short description	LED round converter 350 mA, DALI dimmable (digital)
Material	Plastic
Colour	White
Shape	Round
Outer diameter	56 mm
Hight	25 mm
Weight	0.070 kg
Length of the connection line	100 mm
Conformance	CE

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 25.10.2024 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/

LED round converter 350 mA, DALI dimmable (digital)

Article no. 17658010

Light. For Generations.

BRUMBERG

Operating technology of driver	
AC nominal voltage min	200 V
AC nominal voltage max	240 V
Frequency min	50 Hz
Frequency max	60 Hz
Protection class	П
Degree of protection	IP20
Power min	2.1 W
Power	9 W
Starting current	2 A
Suitable for emergency lighting	No
measure point (tc)	85 °C
Version	without
Power factor	0.9
Output voltage max	25.00 V
Output voltage min.	6.00 V
Control	DALI-2, PUSH-Dimm
Number of poles	2
Enviroment temprature (ta)	-20 °C up to +45 °C
Measure point (tc)	max. +85 °C
Output current	350 mA
Length of the connection line	100 mm

Packing data	
Gross weight	0.09 kg
Length of packaging	70 mm
Packaging width	47 mm
Packaging hight	81 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.
	By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.