




LED converter 700mA, Casambi dimmable
Article no. 17772020

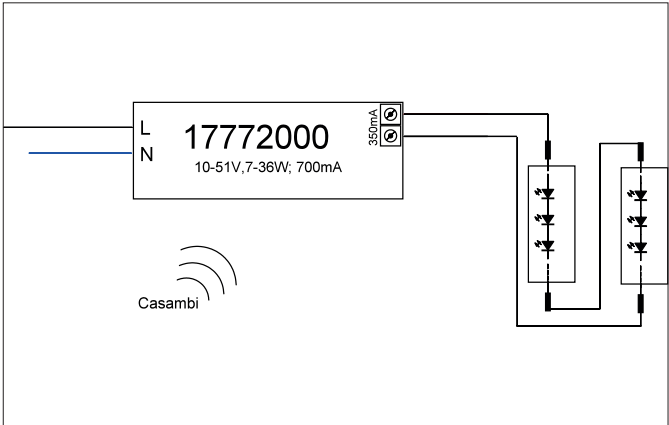

Tender
LED converter 700mA, Casambi dimmable, white, rectangular. This control gear meets the requirements for safety lighting systems in accordance with DIN EN 50172 VDE 0108-100:2005-01. This converter is protected against overvoltage and short circuits as well as thermal and electrical overload by fuses. The input and output terminals are suitable for cables with a cross-section of up to 1.5 mm². Material: Plastic, Protection class on room side: according to DIN EN 60529: IP20, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 36 W, Dimmable: Yes, Type of dimming: Casambi-Push.

Article data	
Article no.	17772020
GTIN	4251433926733
Short description	LED converter 700mA, Casambi dimmable
Material	Plastic
Colour	white
Shape	Rectangular
Length	146.5 mm
Width	44 mm
Hight	30 mm
Scope of delivery	Plug&Play-Ausgangsleitung, Länge 110 mm mit Anschlussbox
Weight	0.198 kg
stamp	ENEC 05, EL
Conformance	CE


LED converter 700mA, Casambi dimmable

Article no. 17772020

Operating technology of driver	
AC nominal voltage min	198 V
AC nominal voltage max	264 V
Frequency min	50 Hz
Frequency max	60 Hz
DC nominal voltage min	176 V
DC nominal voltage max	275 V
Protection class	II
Degree of protection	IP20
Power min	7 W
Power max.	36 W
Output_ripple_current	3
Starting current	5 A, 50 µs
Suitable for emergency lighting	No
measure point (tc)	85 °C
Version	Plug&Play + connection box
Power factor	0.95
max. no. lights on B16 A	50
Output voltage max	51.00 V
Output voltage min.	10.00 V
Flicker value Pst LM	1.00
Control	Casambi-Push
Number of poles	2
Environment temperature (ta)	-25 °C bis +45 °C
Measure point (tc)	max. +80 °C
Average nominal lifespan	40000 h
Output current	700 mA

Packing data	
Gross weight	0.265 kg
Length of packaging	90 mm
Packaging width	55 mm
Packaging height	109 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>