


**LED converter 350 mA, trailing-edge phase dimmable**  
Article no. 17663020

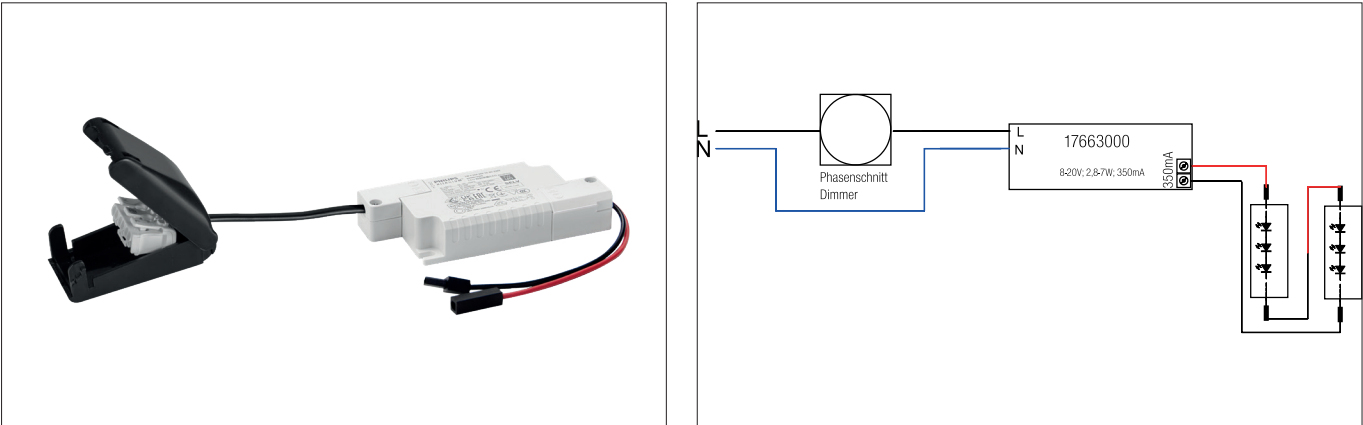

**Tender**

LED converter 350 mA, trailing edge dimmable, white, rectangular. This converter is protected by fuses against overvoltage and short circuits as well as thermal and electrical overload. The input and output terminals are suitable for cables with a cross-section of up to 1.5 mm². Material: Plastic, Protection class on room side: according to DIN EN 60529: IP20, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 7 W, Dimmable: Yes, Type of dimming: Phase cut-off.

Article data	
Article no.	17663020
GTIN	4251433918448
Short description	LED converter 350 mA, trailing-edge phase dimmable
Material	Plastic
Colour	White
Shape	Rectangular
Length	110 mm
Width	50 mm
Hight	19 mm
Scope of delivery	Plug&Play-Ausgangsleitung, Länge 110 mm und Anschlussbox
Weight	0.090 kg
stamp	ENEC 05
Conformance	CE

**LED converter 350 mA, trailing-edge phase dimmable**

Article no. 17663020

Operating technology of driver	
AC nominal voltage min	198 V
AC nominal voltage max	264 V
Frequency min	50 Hz
Frequency max	60 Hz
Protection class	II
Degree of protection	IP20
Power min	2.8 W
Power	7 W
Output_ripple_current	20
Starting current	1 A, 15,2 µs
Suitable for emergency lighting	No
measure point (tc)	70 °C
Version	Plug&Play + connection box
Power factor	0.9
max. no. lights on B16 A	250
Output voltage max	20.00 V
Output voltage min.	8.00 V
Flicker value Pst LM	1.00
Control	Trailing-edge phase
Number of poles	2
Flicker-free	Yes
Environment temperature (ta)	0°C up to 40°C
Measure point (tc)	max. +80 °C
Average nominal lifespan	50000 h
Output current	350 mA
Efficiency	0.78

Packing data	
Gross weight	0.13 kg
Length of packaging	95 mm
Packaging width	75 mm
Packaging height	95 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>