



DMX/DALI INTERFACE FOR TVRGBDMX RECEIVER

Product code:
TVSMX000A01 slave interface DMX DALI

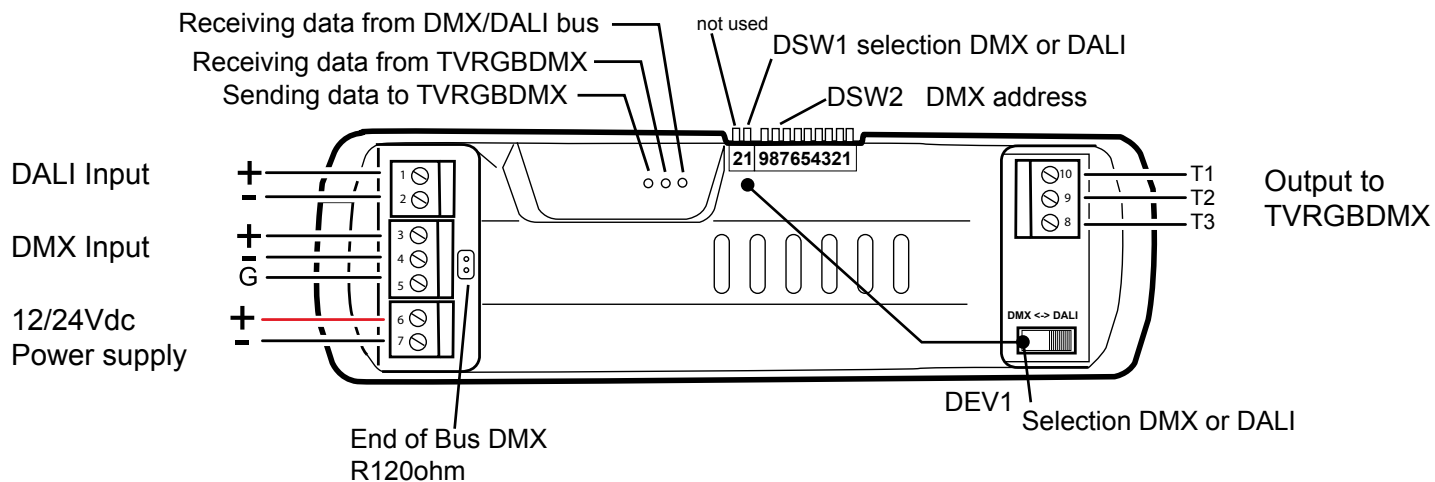

1 - Functioning principle

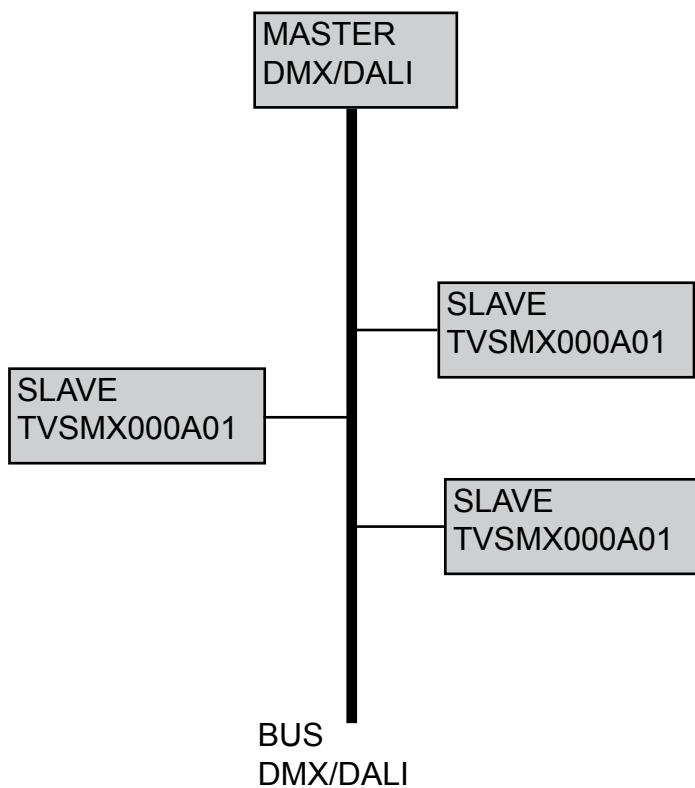


Code Number:	Series		Model number	
TVDMX000A01			T461.01	24/05/2011


2 - DMX or DALI selection

For the proper functioning of the receiver it is necessary to select the type of input used (DMX or DALI) in both the dip switch DSW1 and in the selector DEV1.

Selection of DMX input

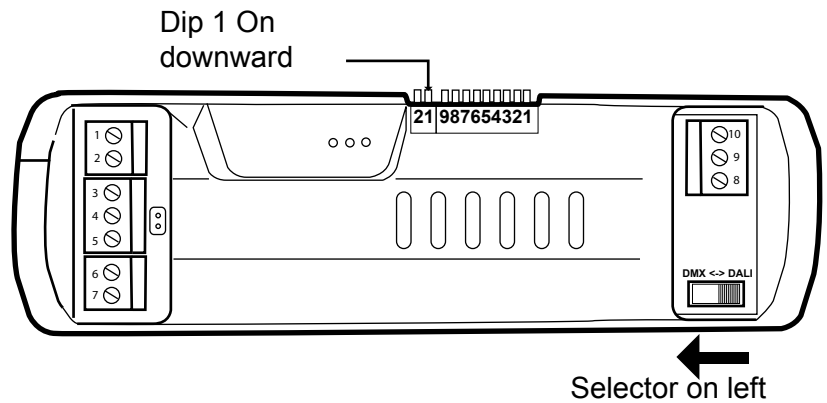

Selection of DALI input

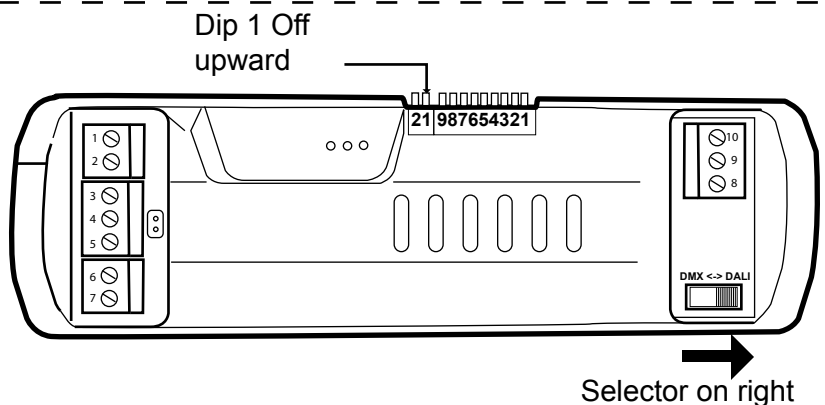

3 - Selection of DMX address


Using the DMX bus type it is necessary to select the address of the slave receiver. The address is selected by the 9 dip switches DSW2; the address value is determined by the sum of the values selected by dip switch +1.

To operate the receiver uses 4 consecutive addresses; the selected one and 3 thereafter. For example, lowering the dip switches DIP1 and DIP6 the selected address will be 33 +1. For instance the receiver will use the addresses 34-35-36-37.

	DIP 1	DIP2	DIP3	DIP4	DIP5	DIP6	DIP7	DIP8	DIP9
Value:	1	2	4	8	16	32	64	128	256

DIP Off (upward) = 0

DIP On (downward) = Value

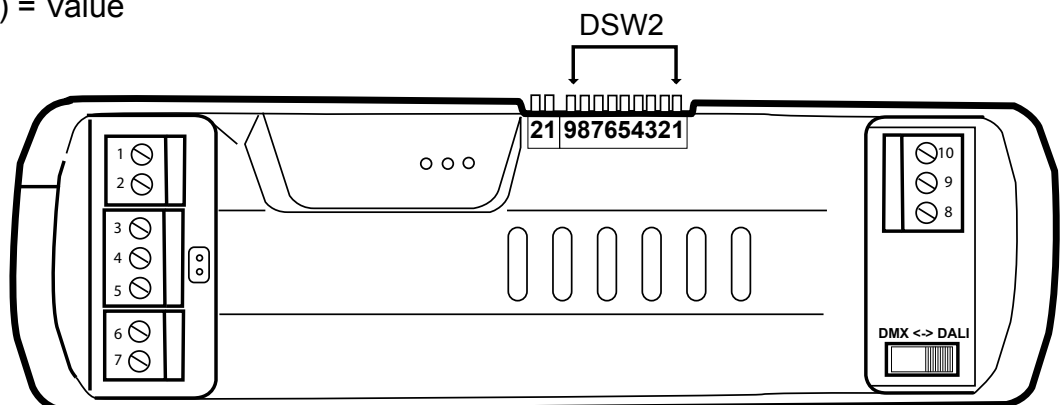

Warning




The general power supply of the device has to be by a power supplier which can supply the power and tension needed. The product must not be enclosed or placed with insulating material such as glass wool, polystyrene or similar materials. Let the housing to be well-ventilated. In the view of a constant development of their products, the manufacturer reserves the right for changing technical data and features without prior notice.

TECHNICAL SPECIFICATIONS


-Power supply	12/24 Vdc
-Operating temperature range	-20° - +60°C

INTERFACCIA DMX/DALI PER RICEVITORI TVRGBDMX

Codice prodotto:
TVSMX000A01 interfaccia slave DMX DALI

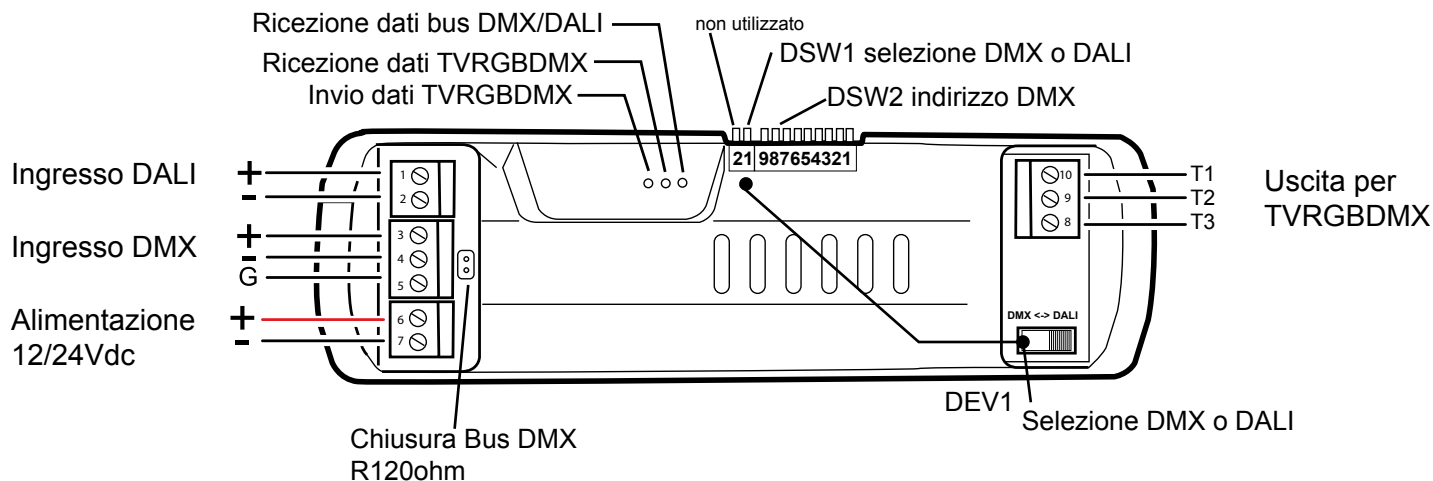

1 - Principio di funzionamento

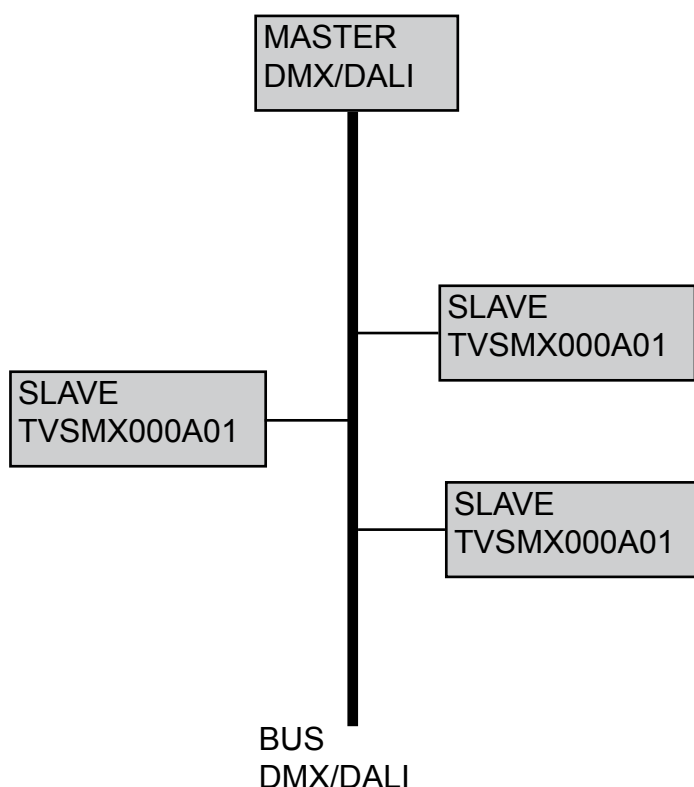


Code Number:	Series		Model number	
TVDMX000A01			T461.01	24/05/2011


2 - Selezione DMX o DALI

Per il corretto funzionamento del ricevitore è necessario selezionare il tipo di ingresso utilizzato (DMX o DALI) sia nel dip switch DSW1, sia nel deviatore DEV1.

Selezione ingresso DMX

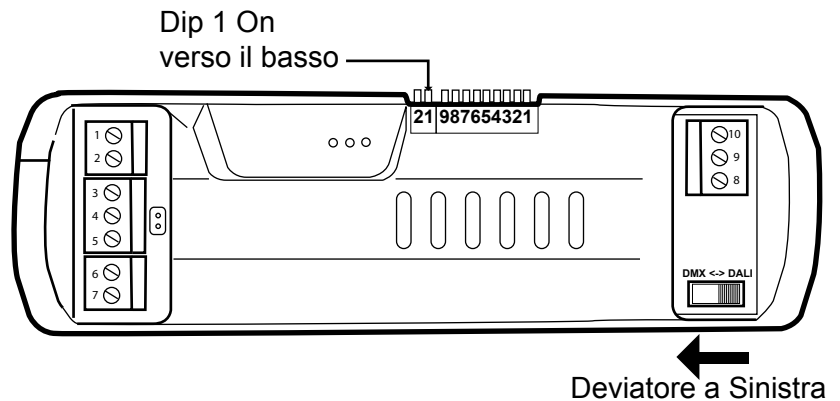

Selezione ingresso DALI

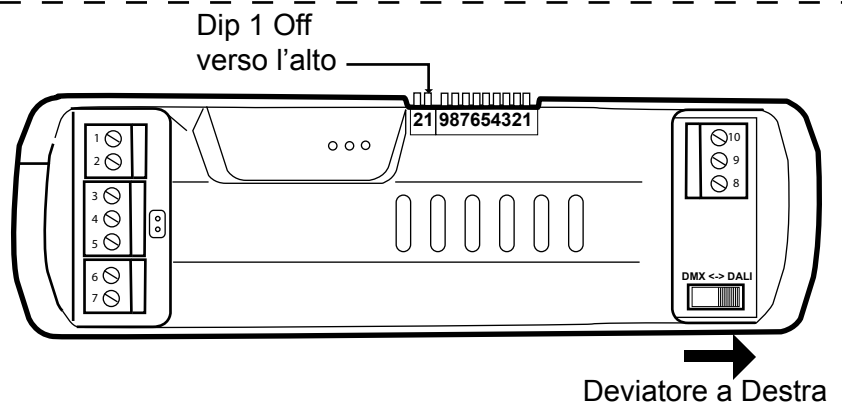

3 - Selezione indirizzo DMX

Utilizzando il bus tipo DMX è necessario selezionare l'indirizzo del ricevitore slave.


L'indirizzo è selezionabile tramite i 9 dip switch di DSW2; il valore dell'indirizzo è determinato dalla somma dei valori selezionati da dip switch +1.

Per il suo funzionamento il ricevitore utilizza 4 indirizzi consecutivi; quello selezionato e i 3 successivi. Ad esempio, abbassando i dip switch DIP1 e DIP6 l'indirizzo selezionato sarà 33+1 e quindi il ricevitore utilizzerà gli indirizzi 34-35-36-37.

	DIP 1	DIP2	DIP3	DIP4	DIP5	DIP6	DIP7	DIP8	DIP9
Valore:	1	2	4	8	16	32	64	128	256

DIP Off (verso l'alto)= 0

DIP On (verso il basso)= Valore

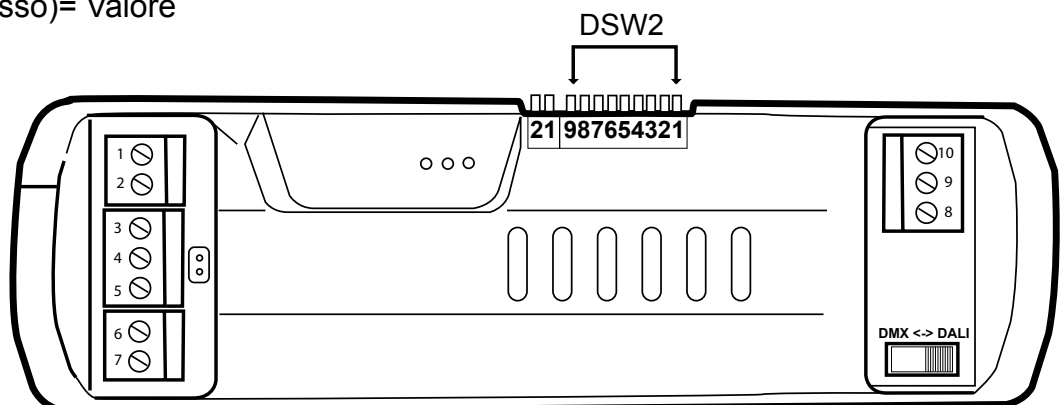

Avvertenze



L'alimentatore del dispositivo deve fornire la tensione e la corrente richiesta dal dispositivo. Il prodotto non deve essere inglobato o appoggiato in prodotti isolanti come lana di vetro o polistirolo o prodotti analoghi. Lasciare il contenitore il più arieggiato possibile. Nell'ottica di un continuo sviluppo dei propri prodotti, il produttore si riserva il diritto di apportare modifiche a dati tecnici e prestazioni senza preavviso.

SPECIFICHE TECNICHE

-Alimentazione	12/24 Vdc
-Temperatura di funzionamento	-20° - +60°C