
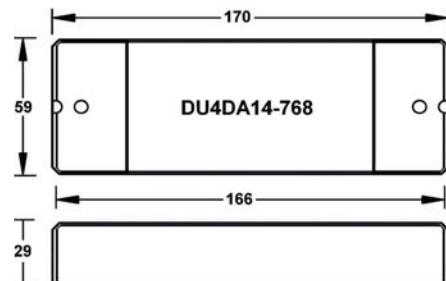


LED-Dimmer 4-kanalig für Konstantspannung bis 192 W / Kanal

LED dimmer 4 channel for constant voltage up to 192 W / channel

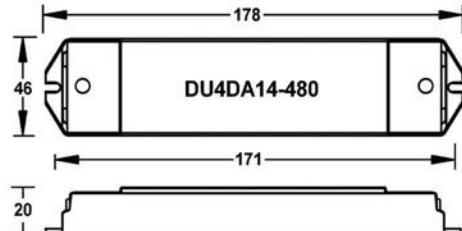

Artikelnummer	Part no.	max. 480 W	max. 768 W
		800650	800651
Typ	Type	DU4DA14-480	DU4DA14-768
Eingangsspannung	Input voltage	12..24 Vdc	
Ausgangsspannung	Output voltage	12..24 Vdc	
Max. Ausgangsleistung bei 12 Vdc	Max. output power at 12 Vdc	4 x 60 W	4 x 96 W
Max. Ausgangsleistung bei 24 Vdc	Max. output power at 24 Vdc	4 x 120 W	4 x 192 W
PWM-Frequenz	PWM frequency	500 Hz	
Steuerstrom max.	Control current max.	1,5 mA	
Max. Bemessungstemperatur (tc)	Rated max. temperature (tc)	75 °C	
Abmessungen	Dimensions	178 x 46 x 20 mm	170 x 59 x 29 mm

- 4-kanaliger LED-Dimmer für LEDs für konstante Spannung
- Ansteuerung nur durch DALI mit SELV-Potential
- 4 Kanäle mit aufeinanderfolgenden Adressen, einstellbar:
 - einen Knopf lange drücken bis Anzeige blinkt (Adresse des ersten Kanals)
 - rechts / links drücken zum Einstellen
 - lange drücken zum Speichern oder Adressierung durch DALI-Steuerung
- Geeignet zur Ansteuerung durch CASAMBI-Schnittstellen

- 4 channel LED dimmer for constant voltage
- To be controlled only by DALI with SELV potential
- 4 channels with successive addresses, adjustable:
 - press and hold any button until display flashes (address of first channel)
 - press right / left button to adjust
 - press and hold for saving or addressing by DALI controller
- Adapted to be controlled by CASAMBI interfaces