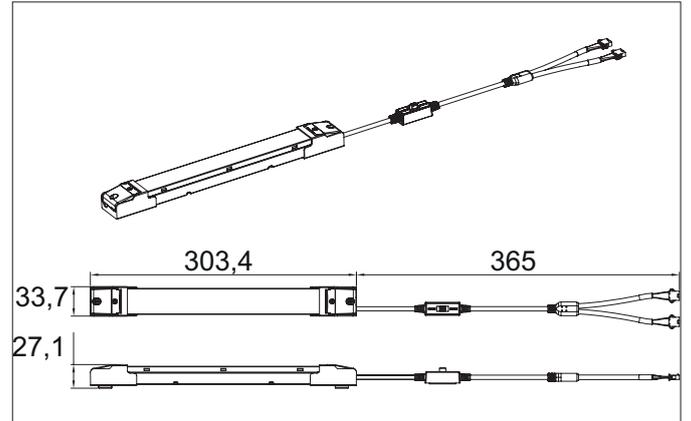



LINEO LED converter 700 mA, DALI dimmable, double execution
 Article no. 17823000

Tender

LED converter 700 mA, DALI dimmable, double execution, white, Rectangular. Material: Steel, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) I, Voltage: 230V AC 50Hz , Power: 42 W, Dimmable: Yes, Type of dimming: DALI-2/PUSH.

Article data	
Article no.	17823000
GTIN	4255752528326
Series name	LINEO
Short description	LED converter 700 mA, DALI dimmable, double execution
Material	Steel
Colour	white
Shape	Rectangular
Length	264 mm
Width	34 mm
Height	24 mm
Scope of delivery	Plug&Play-Anschlussleitung, zur Aufnahme von 2 Stück LINEO - T5/T8 Sanierungsleuchte, Länge: 400 mm, inkl. Schalter zur Farbtemperatureinstellung (3.000 K / 4.000 K), inkl. 4 Stück selbstklebende Zuleitungshalter, inkl. 1 Stück Kabelbrücke für eine einfache (1 Stück LINEO - T5/T8 Sanierungsleuchte) Verwendung.
Weight	0.25 kg
stamp	ENEC 25, EL
Conformance	CE


LINEO LED converter 700 mA, DALI dimmable, double execution

Article no. 17823000

Operating technology of driver	
AC nominal voltage min	198 V
AC nominal voltage max	264 V
Frequency min	47 Hz
Frequency max	63 Hz
DC nominal voltage min	176 V
DC nominal voltage max	276 V
Protection class	I
Degree of protection	IP20
Power	1 W
Power max.	42 W
Output_ripple_current	5
Starting current	24,3 A, 175 µs
Suitable for emergency lighting	Yes
measure point (tc)	80 °C
Version	Plug&Play
Power factor	0.9
max. no. lights on B16 A	39
Output voltage max	52.00 V
Output voltage min.	15.00 V
Flicker value Pst LM	1.00
Stroboscopic effect value SVM	.40
Control	DALI-2/PUSH
Number of poles	3
Environment temperature (ta)	-25 °C bis +40 °C
Measure point (tc)	max. +80 °C
Output current	700 mA
Safety devices against overvoltage	yes
Safety devices against thermal overload	yes

Packing data	
Gross weight	0.3 kg
Length of packaging	330 mm
Packaging width	50 mm
Packaging height	130 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>