


PERIA LED floor luminaire, microprismatic cover, with indirect light component

Article no. 77454694



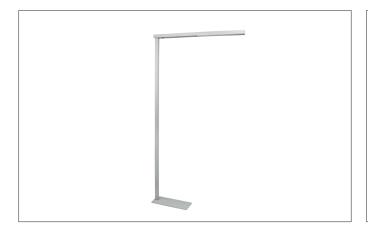







Tender

Square LED free-standing luminaire, microprismatic cover, with indirect component, height 1,933 mm, luminaire length 984 mm, luminaire width 65 mm, height 1,933 mm, weight 9 kg, with rotationally symmetrical narrow-wide beam light distribution. Opal plastic cover, rated luminous flux 4,498 lm, UGR < 19, rated wattage 50 W, neutral white light color, most similar color temperature (CCT) 4,000 K, general color rendering index CRI > 80, housing material: aluminum / steel / plastic, color: silver structure, permissible ambient temperature (ta): -20 °C - +25 °C, protection class (EN 61140): I, degree of protection (DIN EN 60529): IP20. With electronic control gear, switchable.

Article data	
Article no.	77454694
GTIN	4251433983002
Series name	PERIA
Short description	LED floor luminaire, microprismatic cover, with indirect light component
Material	Aluminium / Steel / Plastic
Colour	silver structure
Type of surface	Structure
Shape	Square
Length	984 mm
Width	65 mm
Hight	1,933 mm
Scope of delivery	inkl. Zuleitung 2.500 mm mit Schukowinkelstecker
Weight	9 kg
Conformance	CE

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 06.08.2025 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/

PERIA LED floor luminaire, microprismatic cover, with indirect light component Article no. 77454694



Lighting technology	
Colour temperature	4.000 K
Light colour	white
Light output	Direct/Indirect
Luminous flux	4,498 lm
System efficiency	90 lm/W
Colour rendering	CRI > 80
Glare evaluation	UGR < 19
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	50 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Lamp	LED exchangeable
Lamp holder	Without fitting
Protection class	
Degree of protection	IP20
Control	on/off
Bulb change possible	No
Energy efficiency class	nicht erforderlich

Mounting technology	
Mounting method	Surface mounting
Place of installation	Floor-mounted
Adjustability	Not adjustable
Material cover	Plastic, opal

Packing data	
Gross weight	11 kg
Length of packaging	1,970 mm
Packaging width	230 mm
Packaging hight	100 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you
	support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 06.08.2025 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/