


OREN LED-Panel 1.246 x 310 mm TunableWhite DALI-DT8  
Article no. 32649074

Light.  
For Generations.

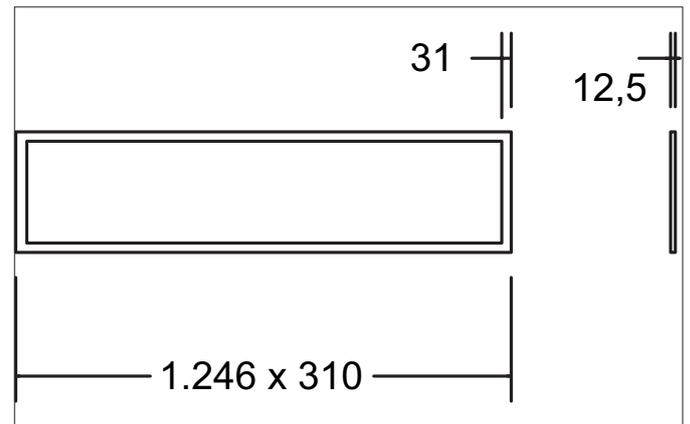

#### Tender

LED-Panel 1.246 x 310 mm TunableWhite DALI-DT8, white, Rectangular. In a compact design, for installation in tool-less rapid assembly systems. Set inkl. Konverter für 230V-Netzspannung, DALI-DT8, Maße Konverter: L 126 x B 81 x H 31mm Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Polystyrene, Degree of protection: according to DIN EN 60529 IP40, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 34W, Amount of light sources / fittings: 1.0 Qty, Colour temperature: from 2.700 K up to 6.000 K, Light colour : White, Beam angle: 115°, Adjustability: Not adjustable, With control gear: Yes, Dimmable: Yes, Control: DALI-DT8.

Article data	
Article no.	32649074
GTIN	4251433970903
Series name	OREN
Short description	LED-Panel 1.246 x 310 mm TunableWhite DALI-DT8
Material	Aluminium / Polystyrene
Colour	White
Shape	Rectangular
Built-in width	310 mm
Built-in length	1246 mm
Installation depth	12.5 mm
Length	1,246 mm
Width	310 mm
Hight	12.5 mm
Scope of delivery	inkl. DALI-DT8 TunableWhite dimmbares Betriebsgerät
Weight	2.500 kg

OREN LED–Panel 1.246 x 310 mm TunableWhite DALI-DT8  
Article no. 32649074

Light.  
For Generations.

Lighting technology	
Colour temperature	2700 - 6000 K
Light colour	White
Farbtemperatur 1	6,000 K
Farbtemperatur 2	2,700 K
Light output	Direct
Lichtstrom 1	2,040 lm
McAdam-Step	McAdam-Step 3
Colour rendering	CRI > 80
Reflector	Without
Beam angle	115°
Glare evaluation	UGR < 22
Light sharing	Symmetric
Adjustable color temperature	Infinite control

Operating technology of the luminaire	
System output	34 W
Voltage type	AC
AC nominal voltage min	220 V
AC nominal voltage max	240 V
Frequenz max.	60 Hz
Frequenz min.	50 Hz
Lamp	LED
Protection class	II
Degree of protection	IP40
Dimmable	Yes
Control	DALI-DT8
Bulb change possible	Yes
Rated life time L80/B20 at 25 °C	50.000 h

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Further references	No cover with thermal insulation material
Material cover	Plastic, opal

Packing data	
Gross weight	3.2 kg
Length of packaging	1,350 mm
Packaging width	345 mm
Packaging height	40 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.

Accessories	