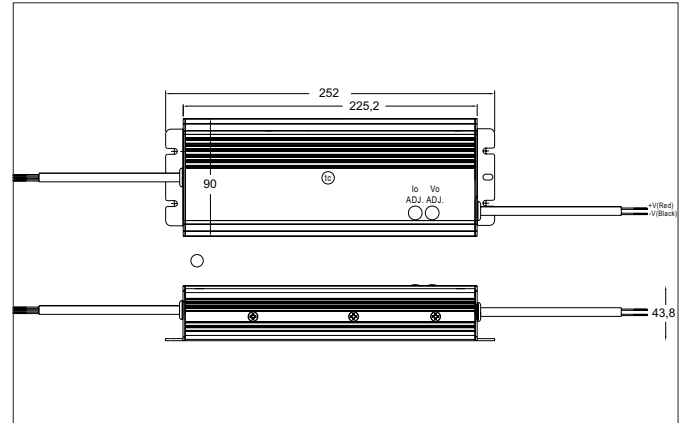


LED driver 24V DC, switchable

Article no. 17227000

Light.
For Generations.**Tender**

LED driver 24V DC, switchable, , Rectangular. Dieses Netzgerät ist durch Sicherungseinrichtungen gegen Überspannung und Kurzschluss sowie thermische und elektrische Überlastung geschützt. Material: Aluminium, Degree of protection: according to DIN EN 60529 IP65, Protection class: (EN 61140) I, Voltage: 24 V DC, Power: 320 W, Dimmable: No, Control: on/off.

Article data	
Article no.	17227000
GTIN	4251433954750
Short description	LED driver 24V DC, switchable
Material	Aluminium
Shape	Rectangular
Length	252 mm
Width	90 mm
Height	44 mm
Weight	1.786 kg
Length of the connection line	300 mm
stamp	MM

LED driver 24V DC, switchable

Article no. 17227000

Light.
For Generations.

Operating technology of driver	
AC nominal voltage min	90 V
AC nominal voltage max	305 V
Frequency min	47 Hz
Frequency max	63 Hz
DC nominal voltage min	127 V
DC nominal voltage max	431 V
Output current	13,34 A mA
Protection class	I
Degree of protection	IP65
max. no. lights on C16 A	2
max. no. lights on B16 A	1
Starting current	70 A (1010us)
Power min	1 W
Power	320 W
Output_ripple_current	150
Suitable for emergency lighting	No
Control	on/off
Environment temperature (ta)	0 °C bis +40 °C
Measure point (tc)	max. +90 °C
Average nominal lifespan	100000 h
Length of the connection line	300 mm
Power factor	0.95

Mounting technology	
Further references	Outdoor No cover with thermal insulation material Control gear suitable for installation in false ceiling
Application	Indoor
Suitable for through-wiring	No

Packing data	
Gross weight	1.892 kg
Length of packaging	335 mm
Packaging width	125 mm
Packaging height	56 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.