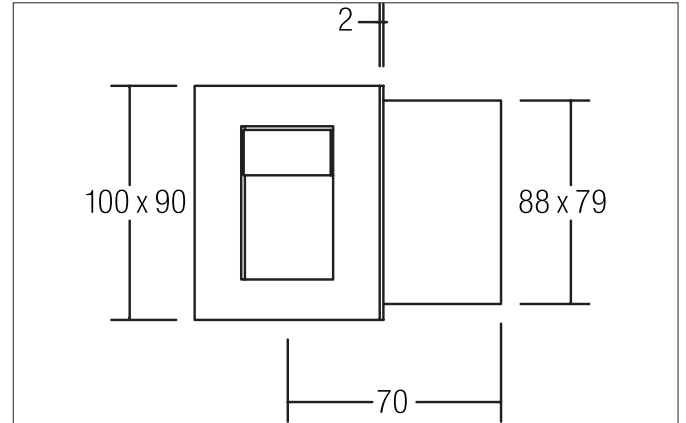
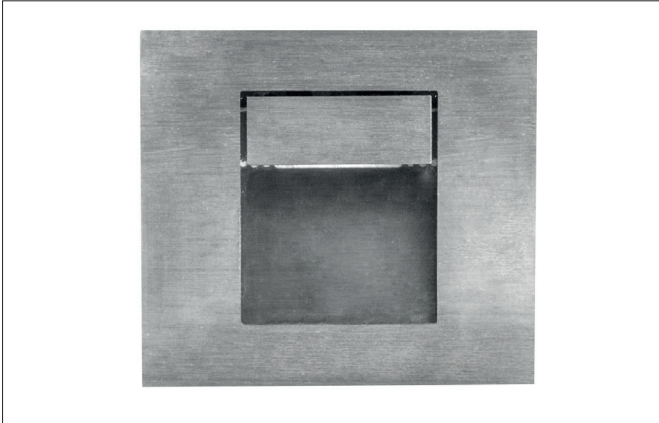


UGLOS LED wall recessed light

Article no. 10166223

Light.
For Generations.**Tender**

LED wall recessed light, Rectangular. Ceiling cut-out L x W 79 x 88 mm, Installation depth 70 mm, Length 90 mm, Width 100 mm, Weight 0,476 kg, with rotationssymmetrical, deep, wide distributed light intensity. optimal light distribution due to a glass transparent cover. Power 1 x 1 W, Light colour warm white, Correlated color temprature (CCT) 3.000 K, Colour rendering index CRI > 80, Housing material: Stainless steel / Steel / Glass, Colour: Stainless steel, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): III, Degree of protection (DIN EN 60529): IP20, .For connection to an external driver, which is not included in the scope of delivery of the luminaire. Other dimmable.

| Article data | |
|--------------------|---------------------------------|
| Article no. | 10166223 |
| GTIN | 4251433907299 |
| Series name | UGLOS |
| Short description | LED wall recessed light |
| Material | Stainless steel / Steel / Glass |
| Colour | Stainless steel |
| Type of surface | Matt |
| Shape | Rectangular |
| Built-in width | 88 mm |
| Built-in length | 79 mm |
| Installation depth | 70 mm |
| Length | 90 mm |
| Width | 100 mm |
| Hight | 90 mm |
| Weight | 0.476 kg |
| Conformance | CE, UKCA |

UGLOS LED wall recessed light

Article no. 10166223


Light.
For Generations.

| Lighting technology | |
|------------------------------|-----------|
| Colour temperature | 3.000 K |
| Light colour | White |
| System efficiency | 1 lm/W |
| Colour rendering | CRI > 80 |
| Reflector | Matt |
| Light sharing | Symmetric |
| Adjustable color temperature | No |

| Operating technology of the luminaire | |
|---------------------------------------|--|
| System output | 1 W |
| Voltage type | DC |
| Current | 350 mA |
| Lamp | LED |
| Lamp holder | Plug&Play |
| Protection class | III |
| Degree of protection | IP20 |
| Dimmable | Depending on type of control gear |
| Control | Other |
| Bulb change possible | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |

| Mounting technology | |
|-----------------------|-------------------|
| Mounting method | Recessed mounting |
| Place of installation | Wall-mounted |
| Adjustability | Not adjustable |
| Material cover | Glass transparent |

| Packing data | |
|-------------------------|---|
| Gross weight | 0.52 kg |
| Length of packaging | 105 mm |
| Packaging width | 95 mm |
| Packaging height | 85 mm |
| Disposal at end of life | This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment. |

| Accessories | |
|---|---|
|  | Article no.: 17666000 LED converter 350 mA, on/off switchable Power: 1 - 5 W Dimensions: 52 mm x 30 mm x 23 mm |