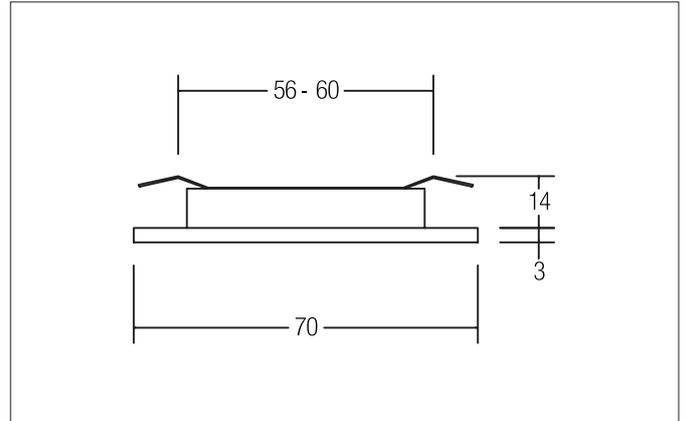


**UMPRO-SET LED recessed downlight set**

Article no. 12171153

Light.  
For Generations.**Tender**

LED recessed downlight set, Round. Toolless ceiling installation by leaf spring. Ceiling cut-out Ø 60 mm, Installation depth 14 mm, Outer diameter 70 mm, Weight 0,670 kg, with rotationssymmetrical, deep, wide distributed light intensity. optimal light distribution due to a plastic, opal cover. Luminous flux 525 lm, Power 3 x 2 W, System Efficiency 262 lm/W, Light colour warm white, Correlated color temperature (CCT) 3.200 K, Colour rendering index CRI 81, Housing material: Cast iron / Plastic, Colour: Alu, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): II, Degree of protection (DIN EN 60529): IP20. With electronic driver, on/off switchable.

Article data	
Article no.	12171153
GTIN	4250047773061
Series name	UMPRO-SET
Short description	LED recessed downlight set
Material	Cast iron / Plastic
Colour	Alu
Type of surface	Matt
Shape	Round
Outer diameter	70 mm
Built-in diameter	60 mm
Installation depth	14 mm
Hight	3 mm
Weight	0.670 kg

**UMPRO-SET LED recessed downlight set**

Article no. 12171153

Light.  
For Generations.

Lighting technology	
Colour temperature	3.200 K
Light colour	White
Light output	Direct
Luminous flux	525 lm
System efficiency	262 lm/W
Colour rendering	CRI 81
Reflector	Without
Beam angle	45°
Light sharing	Symmetric

Packing data	
Gross weight	0.78 kg
Length of packaging	200 mm
Packaging width	150 mm
Packaging height	150 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.