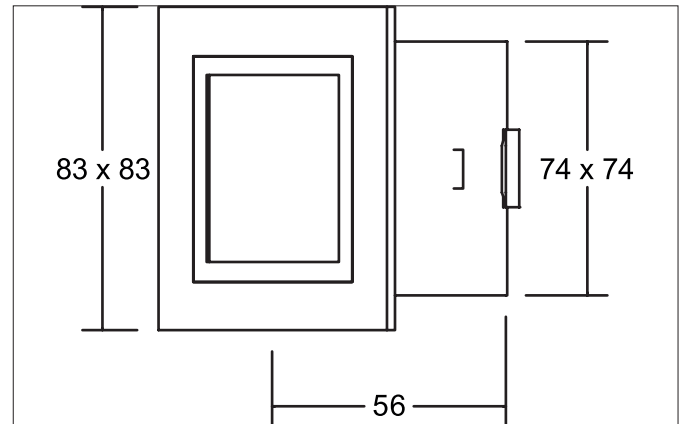
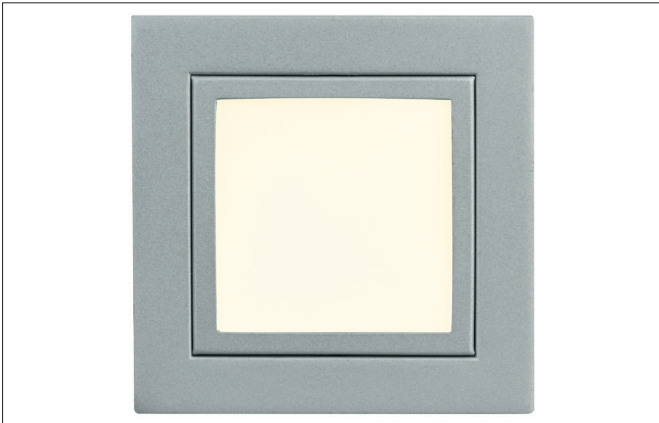


ELEU LED wall recessed light

Article no. P3730WW

Light.
For Generations.**Tender**

LED wall recessed light, Square. Ceiling cut-out L x W 74 x 72 mm, Installation depth 56 mm, Weight 0,222 kg, with rotationssymmetrical, deep, wide distributed light intensity. optimal light distribution due to a glass opal cover. Luminous flux 40 lm, Power 1 x 1,2 W, System Efficiency 33 lm/W, Light colour warm white, Correlated color temperature (CCT) 3.000 K, Colour rendering index CRI > 80, Housing material: Steel, Colour: Alu, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): III, Degree of protection (DIN EN 60529): IP20. For connection to an external driver, which is not included in the scope of delivery of the luminaire. Depending on driver dimmable.

| Article data | |
|--------------------|-------------------------|
| Article no. | P3730WW |
| GTIN | 4250047752356 |
| Series name | ELEU |
| Short description | LED wall recessed light |
| Material | Steel |
| Colour | Alu |
| Type of surface | Matt |
| Shape | Square |
| Built-in width | 72 mm |
| Built-in length | 74 mm |
| Installation depth | 56 mm |
| Width | 83 mm |
| Height | 83 mm |
| Weight | 0.222 kg |

ELEU LED wall recessed light

Article no. P3730WW

Light.
For Generations.

| Lighting technology | |
|---------------------|-----------|
| Colour temperature | 3.000 K |
| Light colour | White |
| Luminous flux | 40 lm/m |
| System efficiency | 33 lm/W |
| Colour rendering | CRI > 80 |
| Reflector | Without |
| Light sharing | Symmetric |

| Operating technology of the luminaire | |
|---------------------------------------|-----------------------------------|
| System output | 1.2 W |
| Voltage type | DC |
| Current | 350 mA |
| Lamp | LED |
| Lamp holder | Plug&Play |
| Protection class | III |
| Degree of protection | IP20 |
| Dimmable | Depending on type of control gear |
| Control | Depending on driver |
| Bulb change possible | Yes |

| Mounting technology | |
|-----------------------|-------------------------------------------|
| Mounting method | Recessed mounting |
| Place of installation | Wall-mounted |
| Adjustability | Not adjustable |
| Further references | No cover with thermal insulation material |
| Material cover | Glass opal |

| Packing data | |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gross weight | 0.272 kg |
| Length of packaging | 115 mm |
| Packaging width | 85 mm |
| Packaging height | 85 mm |
| Disposal at end of life | This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment. |

ELEU LED wall recessed light

Article no. P3730WW

Light.
For Generations.

| Accessories | |
|------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
|  | Article no.: 17666000 LED converter 350 mA, on/off switchable Power: 1 - 5 W Dimensions: 52 mm x 30 mm x 23 mm |
|  | Article no.: 17662020 LED converter 350 mA, on/off switchable Power: 1 - 7,2 W Dimensions: 68 mm x 35 mm x 21 mm |
|  | Article no.: 17613000 LED converter 350 mA, on/off switchable Power: 1 - 15 W Dimensions: 115 mm x 34 mm x 19 mm |
|  | Article no.: 17621020 LED converter 350 mA, on/off switchable Power: 1 - 21 W Dimensions: 128 mm x 50 mm x 13 mm |
|  | Article no.: 17648020 LED converter 350 mA, trailing-edge phase dimmable Power: 0,7 - 17 W Dimensions: 166 mm x 46 mm x 34 mm |