
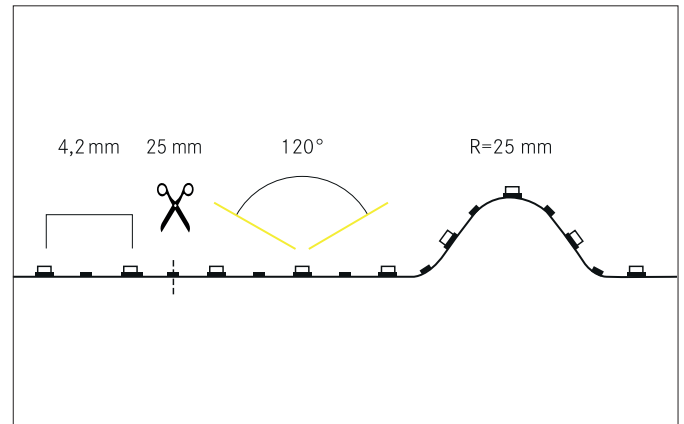


QUALITYFLEX Select LED flex lighting, 25 mm, CRI > 90, 19,2 W / m, IP00
Article no. 75205027

Light.
For Generations.

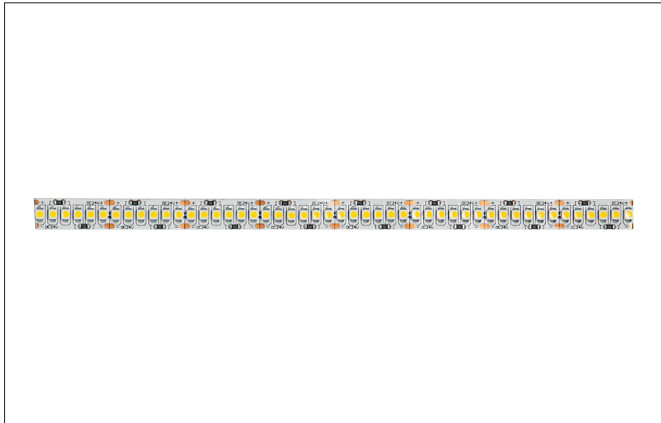

Tender

LED flex lighting, 25 mm, CRI > 90, 19,2 W / m, IP00, white, 2.700K, CRI > 90. LED flex lighting decorative, technical as well as efficient lighting of light covers, linear applications and backlighting, basic or general lighting of rooms, architectural applications and for areas where high illumination is required, such as indirect or direct lighting, luminous ceilings, gastronomy lighting and much more. Length: 25.0 mm
Lamp power per meter: 19.2 W/m, Degree of protection: IP00, Protection class: III, Voltage: 24V DC, Beam angle: 120.0 °, 240 LEDs per meter, Chip distance (Short Pitch) : 4,2mm. For individual application, the LED flex board can be used all 25 mm be cut back. The maximum system length of 5.000mm must not be exceeded with one feed-in.

Product Benefits

- Suitable for indoor use.
- Suitable for general lighting thanks to dense LED placement.
- Length 5000 mm with a pitch of 25 mm for special flexibility.
- Double-sided feed of 350 mm.
- Available in 2700 K, 3000 K, 4000 K and 6000 K.
- Dimmable with appropriate accessories.

QUALITYFLEX Select LED flex lighting, 25 mm, CRI > 90, 19,2 W / m, IP00

Article no. 75205027

Light.
For Generations.

| Article data | |
|-------------------------------|--|
| Article no. | 75205027 |
| GTIN | 4250047798866 |
| Series name | QUALITYFLEX Select |
| Short description | LED flex lighting, 25 mm, CRI > 90, 19,2 W / m, IP00 |
| Colour | White |
| Length | 25 mm |
| Width | 10 mm |
| Hight | 2.4 mm |
| Scope of delivery | Including 1 x mounting instruction |
| Weight | 0.001 kg |
| Length of the connection line | 350 mm |
| stamp | UKCA |

| Lighting technology | |
|---------------------|---------------|
| Colour temperature | 2.700 K |
| Light colour | White |
| System efficiency | 19 lm/W |
| McAdam-Step | McAdam-Step 5 |
| Colour rendering | CRI > 90 |
| Beam angle | 120° |

| Operating technology of the luminaire | |
|---------------------------------------|---------------------|
| Lamp power per meter | 19.2 W/m |
| Voltage type | DC |
| DC nominal voltage max | 24 V |
| Lamp | LED |
| Protection class | III |
| Degree of protection | IP00 |
| Ambient temperature | -10 °C up to +40 °C |
| Dimmable | Yes |
| Wire number | 2 |
| Control | Depending on driver |
| Length of the connection line | 350 mm |
| Design of the connecting cable | one-sided |
| Bulb change possible | No |

| Operating technology of QualityFlex | |
|-------------------------------------|---------------------|
| Short Pitch | 4.2 mm |
| Number of lamps per meter | 240 Qty |
| Length of individual sections | 25 mm |
| Smallest bend radius | 25 mm |
| Length | 25 mm |
| Maximum module length | 5,000 mm |
| Circuit type | Parallel conduction |
| LED Type | 2835 LED |

| Packing data | |
|-------------------------|---|
| Gross weight | 0.005 kg |
| Length of packaging | 70 mm |
| Packaging width | 45 mm |
| Packaging hight | 80 mm |
| Disposal at end of life | This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment. |

QUALITYFLEX Select LED flex lighting, 25 mm, CRI > 90, 19,2 W / m, IP00

Article no. 75205027

Light.
For Generations.

| Compatible Driver | | | | | | |
|-------------------|-----------|-------|---------------------|--------|-------|-------|
| Article no. | Power min | Power | Control | Length | Width | Hight |
| 17206000 | 1 W | 20 W | 1-10 V | 146 mm | 55 mm | 19 mm |
| 17207000 | 1 W | 30 W | on/off | 160 mm | 50 mm | 22 mm |
| 17214000 | 1 W | 7.2 W | on/off | 68 mm | 35 mm | 21 mm |
| 17223000 | 1 W | 75 W | on/off | 185 mm | 60 mm | 31 mm |
| 17224000 | 1 W | 100 W | on/off | 199 mm | 63 mm | 36 mm |
| 17225000 | 1 W | 150 W | on/off | 219 mm | 63 mm | 36 mm |
| 17226000 | 1 W | 240 W | on/off | 244 mm | 71 mm | 38 mm |
| 17230000 | | | Trailing-edge phase | | | |
| 17240000 | | | on/off | | | |

| Compatible Conroller | | | | | | |
|----------------------|-----------|-------|-----------------------------|--------|---------|-------|
| Article no. | Power min | Power | Control | Length | Width | Hight |
| 18151000 | 1 W | 240 W | KNX | 170 mm | 59 mm | 30 mm |
| 18152000 | 1 W | 240 W | DALI-DT6 | 170 mm | 59 mm | 30 mm |
| 18153000 | 1 W | 240 W | DMX | 170 mm | 59 mm | 30 mm |
| 18154000 | 1 W | 240 W | 1-10 V | 170 mm | 59 mm | 30 mm |
| 18161000 | 1 W | 240 W | KNX | 72 mm | 90 mm | 70 mm |
| 18162000 | 1 W | 240 W | DALI-DT6 | 54 mm | 110 mm | 66 mm |
| 18164000 | 1 W | 240 W | 1-10 V | 54 mm | 110 mm | 66 mm |
| 17528000 | 1 W | 240 W | Wireless technology control | | | |
| 17502000 | 0 W | 120 W | DALI | 183 mm | 33 mm | 23 mm |
| 18157000 | 48 W | 240 W | ZigBee | 145 mm | 46.5 mm | 16 mm |
| 18207000 | | | | 137 mm | 45 mm | 13 mm |
| 18192000 | 120 W | 240 W | Wireless technology control | 160 mm | 45 mm | 18 mm |
| 18195000 | 120 W | 240 W | Wireless technology control | 160 mm | 45 mm | 18 mm |
| 18199000 | | | | | | |
| 18202000 | | | | | | |

QUALITYFLEX Select LED flex lighting, 25 mm, CRI > 90, 19,2 W / m, IP00

Article no. 75205027

Light.
For Generations.

| Compatible Profiles | | | | |
|--|-------------|----------|---------|---------|
| Short description | Series name | Length | Width | Hight |
| Surface-mounted profile 53605260 | P02-10 | 2,000 mm | 17.5 mm | 25 mm |
| Surface-mounted profile 53600070 | P01-10 | 2,000 mm | 20 mm | 8 mm |
| Surface-mounted profile 53601080 | P03-12 | 2,000 mm | 17.8 mm | 10.8 mm |
| Surface-mounted profile 53602070 | P04-14 | 2,000 mm | 24 mm | 9 mm |
| Surface-mounted profile 53603070 | P06-20 | 2,000 mm | 23 mm | 25.1 mm |
| LED surface-mounted profile 53606070 | P30-30 | 2,000 mm | 33.4 mm | 29.6 mm |
| Wall recessed profile 53650260 | P32-12 | 2,000 mm | 19.1 mm | 81 mm |
| Floor recessed profile 53652260 | P33-12 | 2,000 mm | 15.8 mm | 13.7 mm |
| Recessed profile 53654070 | P36-20 | 2,000 mm | 30 mm | 20.4 mm |
| LED recessed profile 53759070 | P40-30 | 2,000 mm | 44.4 mm | 24 mm |
| Plaster profile 53655070 | P37-30 | 2,000 mm | 63.4 mm | 15.9 mm |
| Plaster profile 53656070 | P38-30 | 2,000 mm | 63.4 mm | 24 mm |
| Surface-mounted corner profile 53700070 | P60-10 | 2,000 mm | 20 mm | 16 mm |
| Surface-mounted corner profile 53702070 | P62-14 | 2,000 mm | 24 mm | 19.4 mm |
| Step profile for indoor use 53752260 | P71-10 | 2,000 mm | 51.5 mm | 20.6 mm |
| Wall surface-mounted profile 53751260 | P74-14 | 2,000 mm | 18.5 mm | 55 mm |
| Ceiling recessed profile with wall mounting 53755260 | P75-14 | 2,000 mm | 28 mm | 28 mm |
| Glass edge profile 53757260 | P77-10 | 2,000 mm | 15.6 mm | 22.5 mm |
| Surface-mounted corner profile 53385261 | ONE | | 24 mm | 19.4 mm |
| Surface-mounted profile, high 53381302 | ONE | | 17.6 mm | 15.9 mm |
| Surface-mounted profile 53607080 | P16-16 | 2,000 mm | 18.8 mm | 18.6 mm |
| Flexible profile 53753070 | P72-12 | 2,000 mm | 20 mm | 3.3 mm |
| Wall surface-mounted profile 53754070 | P73-12 | 2,000 mm | 17.8 mm | 46.1 mm |