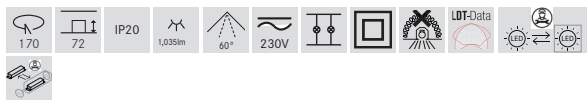
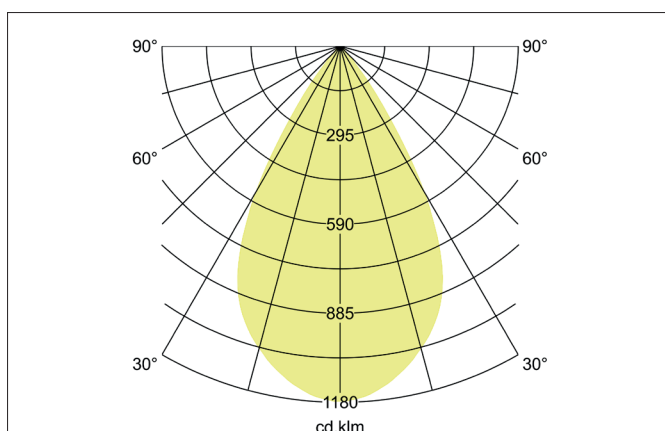
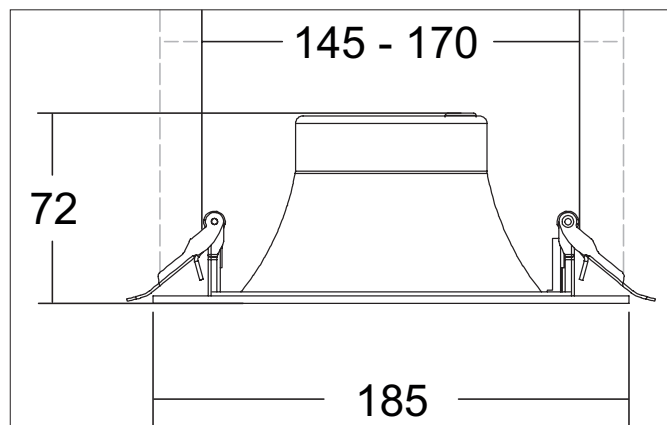


**DIOS MICRO LED recessed downlight, switchable**

Article no. 40670163

**Tender**

Round LED recessed downlight, multi-lumen, switchable, matt reflector, tool-free ceiling installation using installation springs. Ceiling cut-out Ø 170 mm, installation depth 72 mm, outer diameter 185 mm, weight 0.3 kg, with rotationally symmetrical deep-wide beam light distribution. Transparent plastic cover, rated luminous flux 1,035 lm, UGR < 16, rated wattage 1 x 7.9 W, light color warm white, most similar color temperature (CCT) 3,000 K, general color rendering index CRI > 90, service life L80/B10 at 25 °C: 50.000 h, Service life L80/B50 at 25 °C: 50,000 h, Housing material: aluminum / glass / plastic, Colour: silver structure, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): II, degree of protection (DIN EN 60529): IP20. With electronic control gear, switchable.

Product Benefits

- Vertiefter Lichtaustritt mit Blendungsbewertung UGR<16.
- Breiter Leuchtenrand für ein Einbaumaß von 145 - 170 mm (vermeidet u. U. den Bedarf eines Reduzierringes).
- Homogene Farbgebung durch gleichfarbige Ausführung von Reflektor und Außenring (strukturweiß, strukturschwarz, struktursilber).
- Konverter mit großem Anschlußraum zur einfachen, schnellen und komfortablen Inbetriebnahme.
- Schaltbare Version - in gleichen Abmessungen auch dimmbar lieferbar (DALI-2, Push Dim).
- Lieferbar in 3.000 K oder 4.000 K.
- Multilumen-Ausführung (werkseitig eingestellter Konstantstrom 150 mA).
- Weitere Stromeinstellung bauseits möglich: 100 mA.
- BEG-förderfähig (Systemeffizienz > 120 lm / W).

**DIOS MICRO LED recessed downlight, switchable**

Article no. 40670163

Article data	
Article no.	40670163
GTIN	4251433995470
Series name	DIOS MICRO
Short description	LED recessed downlight, switchable
Material	Aluminium / Glass / Plastic
Colour	silver structure
Type of surface	Structure
Shape	Round
Outer diameter	185 mm
Built-in diameter min.	145 mm
Built-in diameter max.	170 mm
Installation depth	72 mm
Weight	0.3 kg
Conformance	CE, UKCA

Lighting technology	
Colour temperature	3.000 K
Light colour	white
Light output	Direct
Luminous flux	1,035 lm
System efficiency	131 lm/W
Colour rendering	CRI > 90
Reflector	Matt
Reflector colour	silver
Beam angle	60°
Glare evaluation	UGR < 16
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	7.9 W
Voltage type	AC/DC
AC nominal voltage max	230 V
DC nominal voltage min	176 V
DC nominal voltage max	276 V
Frequency max	50 Hz
Lamp	LED
Lamp holder	Without fitting
Protection class	II
Degree of protection	IP20
Dimmable	No
Control	on/off
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Rated life time L80/B10 at 25 °C	50.000 h
Rated life time L80/B50 at 25 °C	50.000 h
Energy efficiency class	nicht erforderlich


DIOS MICRO LED recessed downlight, switchable

Article no. 40670163

Operating technology of driver	
AC nominal voltage max	230 V
Frequency max	50 Hz
DC nominal voltage min	176 V
DC nominal voltage max	276 V
Protection class	II
Degree of protection	IP20
Power	7.9 W
Suitable for emergency lighting	Yes
Control	on/off

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Max. ceiling thickness	25 mm
Further references	No cover with thermal insulation material
Material cover	Plastic, transparent
Suitable for through-wiring	Yes

Packing data	
Gross weight	0.8 kg
Length of packaging	205 mm
Packaging width	205 mm
Packaging height	100 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>