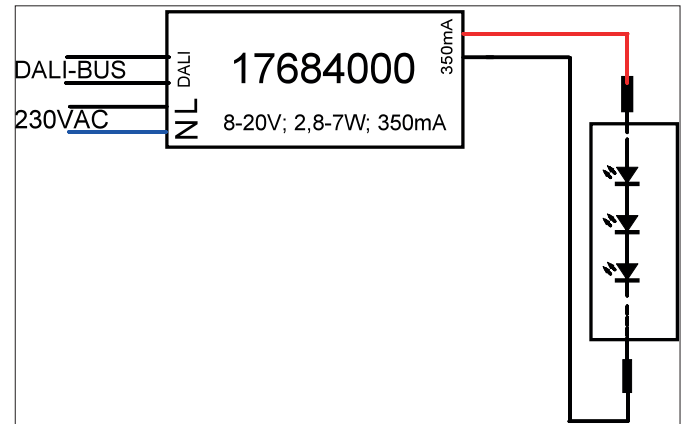


LED converter 350 mA, DALI dimmable (digital)

Article no. 17684000

Light.
For Generations.**Tender**

LED converter 350 mA, DALI dimmable (digital) , Rectangular. This converter is equipped with safety devices which protect it against over-voltage, short-circuit as well as thermal and electric overloads. The input and output terminals are suitable for cables with a cross-section of up to 0.75-1.5 mm². Material: Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Current: 350 mA, Voltage: 230V AC 50Hz , Power: 7 W, Dimmable: Yes, Control: DALI-2 .

Product Benefits

We guarantee: No afterglow of the LEDs. A weak afterglow of the LED lights in the switched-off state is an undesirable, unacceptable effect. With our new LED converter, this is eliminated. This reduces troubleshooting as well as installation efforts and offers optimal operational reliability. The converter is available in three versions and additionally already integrated in the BB sets.

Article data	
Article no.	17684000
GTIN	4251433951186
Short description	LED converter 350 mA, DALI dimmable (digital)
Material	Plastic
Shape	Rectangular
Length	130 mm
Width	42 mm
Height	22 mm
Scope of delivery	Plug&Play version with 110 mm P&P output cable
Weight	0.086 kg
stamp	ENEC 05, EL
Conformance	CE

LED converter 350 mA, DALI dimmable (digital)

Article no. 17684000

Light.
For Generations.

Operating technology of driver	
AC nominal voltage min	220 V
AC nominal voltage max	240 V
Frequency min	50 Hz
Frequency max	60 Hz
DC nominal voltage min	186 V
DC nominal voltage max	250 V
Output current	350 mA
Protection class	II
Degree of protection	IP20
max. no. lights on C16 A	425
max. no. lights on B16 A	250
Starting current	1 A, 15,2 us
Power min	2.8 W
Power	7 W
Output_ripple_current	4
Suitable for emergency lighting	No
Control	DALI-2
Flicker-free	Yes
Environment temperature (ta)	-20 °C up to +50 °C
Measure point (tc)	max. +70 °C
Average nominal lifespan	50000 h
Version	Plug&Play
Power factor	0.97

Packing data	
Gross weight	0.105 kg
Length of packaging	60 mm
Packaging width	27 mm
Packaging height	150 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.