


**LED power supply 12 V DC, on/off switchable**  
Article no. 17121000

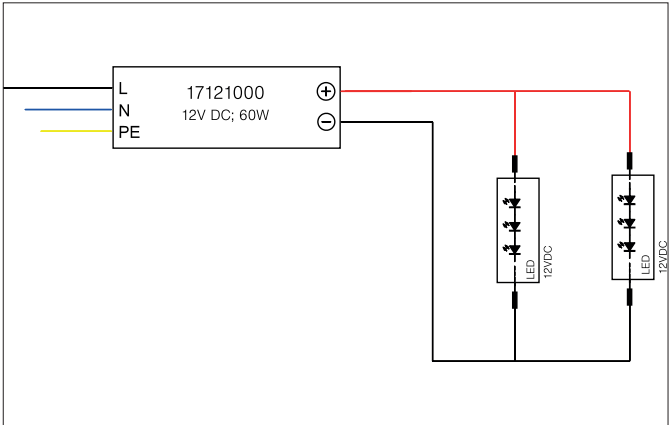

**Tender**  
LED power supply unit 12 V DC, switchable, white, rectangular. This power supply unit is protected by fuses against overvoltage and short circuits as well as thermal and electrical overload. Material: aluminum, Protection class on room side: according to DIN EN 60529: IP65, Protection class: (EN 61140) I, Voltage: 12 V DC, Power: 60 W, Dimmable: No, Type of dimming: Switchable.

| Article data                  |   |
|-------------------------------|---|
| Article no.                   | 17121000                                    |
| GTIN                          | 4251433922087                               |
| Short description             | LED power supply 12 V DC, on/off switchable |
| Material                      | Aluminium                                   |
| Colour                        | White                                       |
| Shape                         | Rectangular                                 |
| Length                        | 180 mm                                      |
| Width                         | 63 mm                                       |
| Hight                         | 36 mm                                       |
| Weight                        | 0.676 kg                                    |
| Length of the connection line | 300 mm                                      |
| stamp                         | ENEC, MM                                    |
| Conformance                   | CE  |

**LED power supply 12 V DC, on/off switchable**

Article no. 17121000

| Operating technology of driver  |                     |
|---------------------------------|---------------------|
| AC nominal voltage min          | 200 V               |
| AC nominal voltage max          | 230 V               |
| Frequency min                   | 47 Hz               |
| Frequency max                   | 63 Hz               |
| DC nominal voltage min          | 142 V               |
| DC nominal voltage max          | 431 V               |
| Protection class                | I                   |
| Degree of protection            | IP65                |
| Power min                       | 1 W                 |
| Power                           | 60 W                |
| Output_ripple_current           | 150                 |
| Starting current                | 50 A, 350 µs        |
| Suitable for emergency lighting | No                  |
| measure point (tc)              | 85 °C               |
| Power factor                    | 0.95                |
| max. no. lights on B16 A        | 5                   |
| max. no. lights on C16 A        | 8                   |
| Output voltage max              | 13.20 V             |
| Output voltage min.             | 10.80 V             |
| Control                         | on/off              |
| Connection type-primary         | Cable               |
| Connection type-secondary       | Open ends           |
| Number of poles                 | 3                   |
| Environment temperature (ta)    | -40 °C up to +80 °C |
| Measure point (tc)              | max. +85 °C         |
| Average nominal lifespan        | 50000 h             |
| Output current                  | 5 A mA              |
| Length of the connection line   | 300 mm              |

| Packing data            |  |
|-------------------------|--|
| Gross weight            | 0.72 kg  |
| Length of packaging     | 240 mm   |
| Packaging width         | 85 mm  |
| Packaging height        | 45 mm  |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |