


LED power supply 12 V DC, on/off switchable

Article no. 17122000

Light.
For Generations.

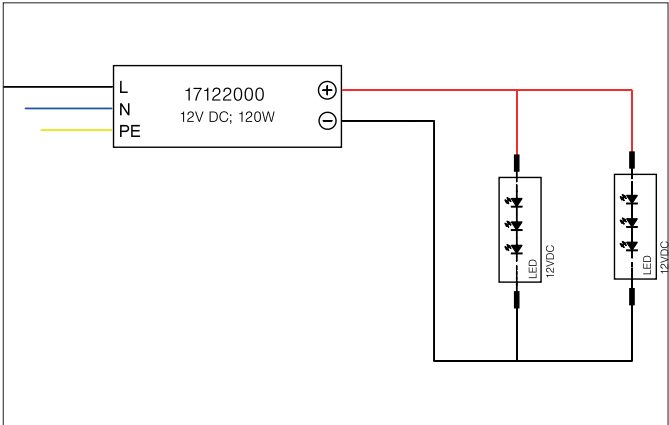

Tender
LED power supply 12 V DC, on/off switchable, white, Rectangular.This power supply unit is equipped with safety devices which protect it against overvoltage, short-circuit as well as thermal and electric overloads. Material: Aluminium, Degree of protection: according to DIN EN 60529 IP65, Protection class: (EN 61140) I, Voltage: 12 V DC, Power: 120 W, Dimmable: No, Control: on/off.

| Article data | |
|-------------------|---|
| Article no. | 17122000 |
| GTIN | 4251433922094 |
| Short description | LED power supply 12 V DC, on/off switchable |
| Material | Aluminium |
| Colour | White |
| Shape | Rectangular |
| Length | 219 mm |
| Width | 63 mm |
| Hight | 36 mm |
| Weight | 0.851 kg |
| stamp | ENEC, MM |
| Conformance | CE |

LED power supply 12 V DC, on/off switchable

Article no. 17122000

Light.
For Generations.

| Operating technology of driver | |
|---------------------------------|---------------------|
| AC nominal voltage min | 200 V |
| AC nominal voltage max | 305 V |
| Frequency min | 47 Hz |
| Frequency max | 63 Hz |
| DC nominal voltage min | 142 V |
| DC nominal voltage max | 431 V |
| Protection class | I |
| Degree of protection | IP65 |
| Power min | 1 W |
| Power max. | 120 W |
| Output_ripple_current | 150 |
| Starting current | |
| Suitable for emergency lighting | No |
| measure point (tc) | 90 °C |
| Power factor | 0.95 |
| max. no. lights on B16 A | 3 |
| max. no. lights on C16 A | 6 |
| Output voltage max | 13.20 V |
| Output voltage min. | 10.80 V |
| Control | on/off |
| Connection type-primary | Cable |
| Connection type-secondary | Open ends |
| Number of poles | 3 |
| Environment temperature (ta) | -40 °C up to +80 °C |
| Measure point (tc) | max. +90 °C |
| Average nominal lifespan | 50000 h |
| Output current | 10 mA |

| Packing data | |
|-------------------------|--|
| Gross weight | 0.901 kg |
| Length of packaging | 275 mm |
| Packaging width | 85 mm |
| Packaging height | 45 mm |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |