



## LED reflector insert MR16, 8 W, 24 V DC

Article no. 12823003



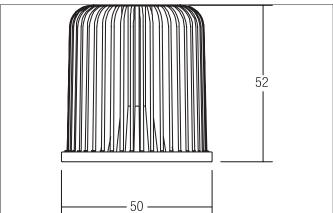

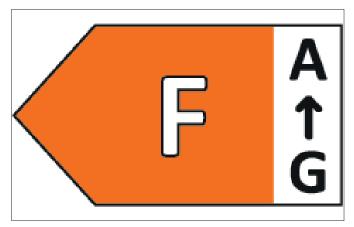











## Tende

LED reflector insert MR16, 8 W, CRI>90, 24 V DC, round. Material: aluminum / glass, degree of protection on room side: to DIN EN 60529: IP20, protection class: (EN 61140) III, voltage: 24V, wattage: 8 W, number of bulbs / sockets: 1 piece, luminous flux: 900 lm, color temperature: 2,850 K, light color: white, beam angle: 60°, type of dimming: dependent on control gear.

Article data	
Article no.	12823003
GTIN	4251433921660
Short description	LED reflector insert MR16, 8 W, 24 V DC
Material	Aluminium / Glass
Shape	Round
Outer diameter	50 mm
Hight	50 mm
Weight	0.073 kg
Conformance	CE, UKCA

Lighting technology	
Colour temperature	2.850 K
Light colour	White
Luminous flux	900 lm
Colour rendering	CRI > 90
Reflector	High-gloss
Beam angle	60°
Light sharing	Symmetric



## LED reflector insert MR16, 8 W, 24 V DC

Article no. 12823003

Packing data	
Gross weight	0.085 kg
Length of packaging	54 mm
Packaging width	54 mm
Packaging hight	68 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.
	By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that
	harmful substances get into the environment.

Required accessories

Article no.: 17206000

LED power supply 24 V DC, 1-10 V dimmable (analog)

Power: 1 - 20 W

Dimensions: 145 mm x 55 mm x 19 mm

https://www.brumberg.com/fileadmin/products/Datenblatt\_17206000\_2021\_DE.pdf

Article no.: 17207000

LED power supply 24 V DC, on/off switchable

Power: 1 - 30 W

Dimensions: 160 mm x 50 mm x 22 mm

https://www.brumberg.com/fileadmin/products/Datenblatt\_17207000\_2021\_DE.pdf

Article no.: 17223000

LED power supply 24 V DC, on/off switchable

Power: 1 - 75 W

Dimensions: 185 mm x 60 mm x 31 mm

https://www.brumberg.com/fileadmin/products/Datenblatt\_17223000\_2021\_DE.pdf