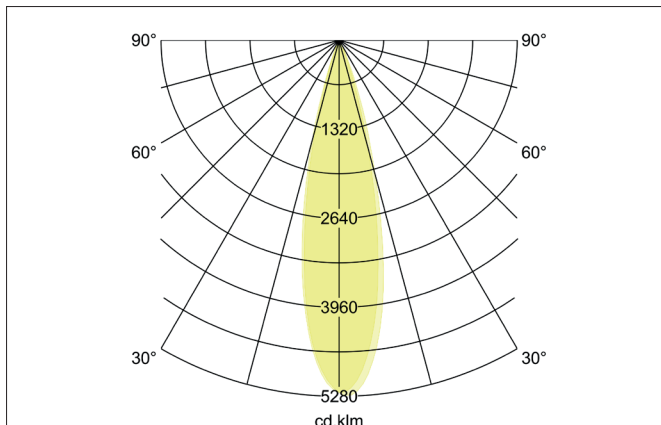
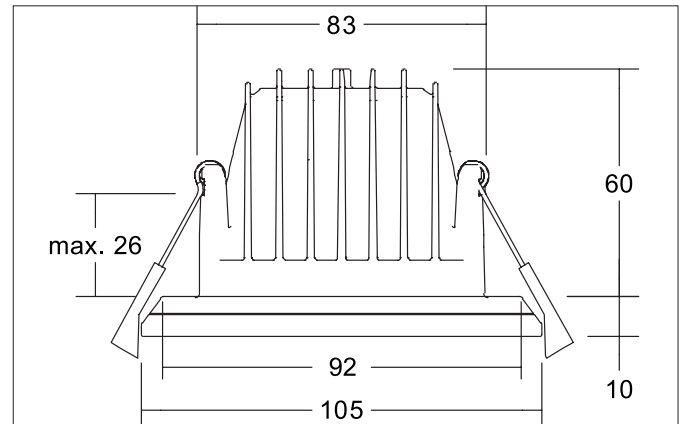


**ZONDRA LED recessed downlight set, direct / indirect, trailing edge
phase dimmable**

Article no. 39339183

**Tender**

Round LED recessed downlight, direct/indirect, dimmable trailing edge, tool-free ceiling installation using installation springs. Ceiling cut-out Ø 83 mm, installation depth 60 mm, outer diameter 105 mm, weight 0.330 kg, silver reflector with rotationally symmetrical deep-wide beam light distribution. Textured plastic cover, with max: 13 W, supplied without light source. Housing material: aluminum / plastic, color: textured black, permissible ambient temperature (ta): -20 °C - +25 °C, protection class (EN 61140): II, degree of protection (DIN EN 60529): IP20. With electronic control gear, trailing edge dimmable with integrated strain relief.

Product Benefits

- Recessed downlight in round design made of solid aluminum.
- Ceiling cut-out 83 mm, outer diameter 92/105 mm, installation depth 60 mm, height 10 mm, maximum ceiling thickness 26 mm, Luminous flux 950 lm, direct/indirect light emission, IP20.
- Also available as a smaller version (diameter 78/90 mm) and as a pure direct version with UGR<16 available in two sizes.
- Supplied including dimmable phase cut-off converter.

ZONDRA LED recessed downlight set, direct / indirect, trailing edge phase dimmable

Article no. 39339183

Article data	
Article no.	39339183
GTIN	4251433981541
Series name	ZONDRA
Short description	LED recessed downlight set, direct / indirect, trailing edge phase dimmable
Material	Aluminium / Plastic
Colour	Black
Type of surface	Structure
Shape	Round
Outer diameter	105 mm
Built-in diameter	83 mm
Installation depth	60 mm
Hight	10 mm
Weight	0.330 kg
Conformance	CE, UKCA

Lighting technology	
Colour temperature	3.000 K
Light colour	White
Light output	Direct/Indirect
Luminous flux	950 lm
System efficiency	73 lm/W
Colour rendering	CRI > 80
Reflector	Matt
Reflector colour	silver
Beam angle	24°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	13 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Lamp	LED
Protection class	II
Degree of protection	IP20
Dimmable	Yes
Control	Trailing-edge phase
Bulb change possible	Yes
Rated life time L70/B50 at 25 °C	50,000 h
Energy efficiency class	nicht erforderlich

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Max. ceiling thickness	26 mm
Further references	No cover with thermal insulation material
Material cover	Plastic, structured
Circlip	Without circlip
Suitable for through-wiring	Yes, with optional accessories

**ZONDRA LED recessed downlight set, direct / indirect, trailing edge
phase dimmable**
Article no. 39339183

Packing data	
Gross weight	0.386 kg
Length of packaging	140 mm
Packaging width	125 mm
Packaging height	85 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>

Optional accessories	
Article no.: 83330000 Connection box 230 V AC, 3-pole	
Dimensions: 80 mm x 41 mm x 34 mm https://www.brumberg.com/fileadmin/products/Datenblatt_83330000_2021_DE.pdf	