



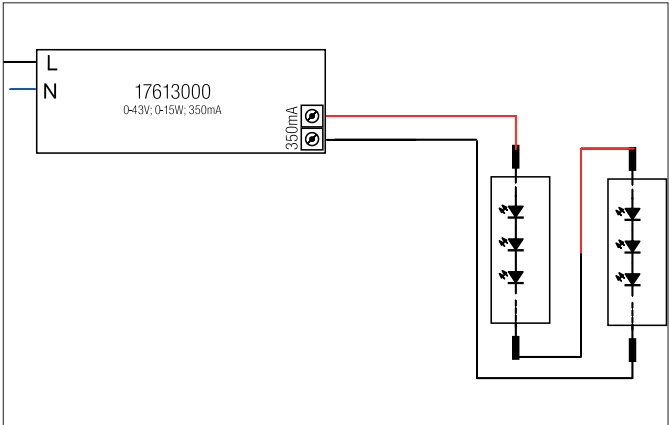

LED-Konverter 350 mA, schaltbar
Article no. 17613010

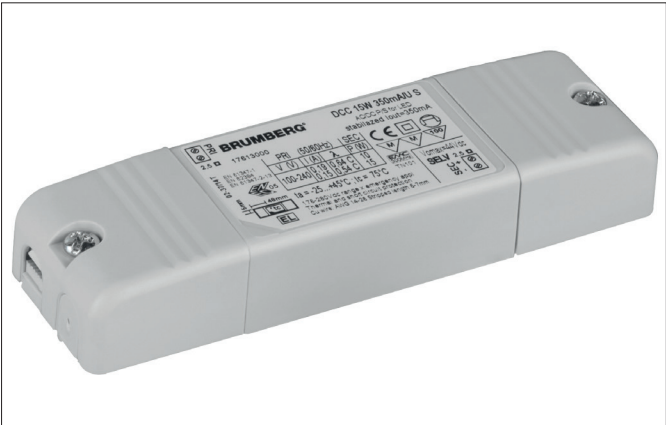

Tender
LED converter 350 mA, switchable, white, rectangular. This operating device meets the requirements for safety lighting systems in accordance with DIN EN 50172 VDE 0108-100:2005-01. This converter is protected against overvoltage and short circuits as well as thermal and electrical overloads by fuses. The input and output terminals are suitable for cables with a cross-section of up to 2.5 mm². Material: Plastic, Protection class on room side: according to DIN EN 60529: IP20, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 15 W, Dimmable: No, Type of dimming: switchable.

| Article data | |
|-------------------|---------------------------------|
| Article no. | 17613010 |
| GTIN | 4251433918523 |
| Short description | LED-Konverter 350 mA, schaltbar |
| Material | Plastic |
| Colour | White |
| Shape | Rectangular |
| Length | 115 mm |
| Width | 34 mm |
| Hight | 19 mm |
| Weight | 0.065 kg |
| stamp | ENEC 05, EL |
| Conformance | CE, UKCA |


LED-Konverter 350 mA, schaltbar

Article no. 17613010

| Operating technology of driver | |
|---------------------------------|-------------------|
| AC nominal voltage min | 90 V |
| AC nominal voltage max | 264 V |
| Frequency min | 50 Hz |
| Frequency max | 60 Hz |
| DC nominal voltage min | 176 V |
| DC nominal voltage max | 275 V |
| Protection class | II |
| Degree of protection | IP20 |
| Power min | 1 W |
| Power max. | 15 W |
| Starting current | 27 A, 250 µs |
| Suitable for emergency lighting | Yes |
| measure point (tc) | 75 °C |
| Version | without |
| max. no. lights on B16 A | 27 |
| Output voltage max | 43.00 V |
| Output voltage min. | 2.00 V |
| Flicker value Pst LM | 1.00 |
| Control | on/off |
| Number of poles | 2 |
| Environment temperature (ta) | -25 °C bis +45 °C |
| Measure point (tc) | max. +75 °C |
| Output current | 350 mA |

| Packing data | |
|-------------------------|--|
| Gross weight | 0.084 kg |
| Length of packaging | 60 mm |
| Packaging width | 27 mm |
| Packaging height | 150 mm |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |