
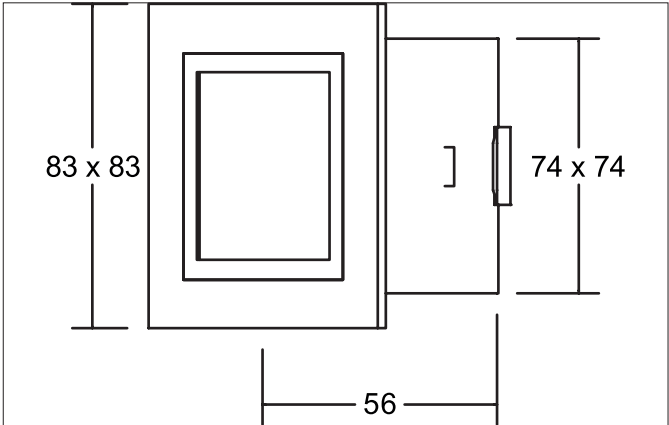


ELEU LED wall recessed light
Article no. P3730B

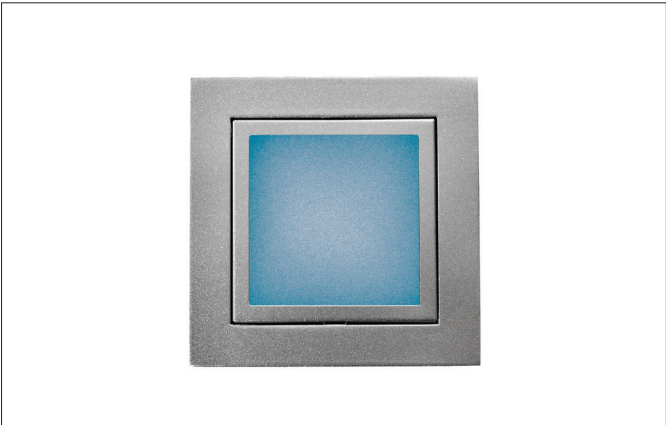

Tender
Square LED recessed wall light, ceiling cut-out L x W 74 x 74 mm installation depth 56 mm, weight 0.222 kg, with rotationally symmetrical narrow-wide beam light distribution. Cover glass opal, rated luminous flux 20 lm, rated power 1 x 1.2 W, general color rendering index CRI > 80, housing material: steel, color: aluminum, permissible ambient temperature (ta): -20 °C - +25 °C, protection class (EN 61140): III, degree of protection (DIN EN 60529): IP20. For connection to an external control gear, which is not included with the luminaire. Dimmable depending on the control gear.

| Article data | |
|--------------------|-------------------------|
| Article no. | P3730B |
| GTIN | 4250047729921 |
| Series name | ELEU |
| Short description | LED wall recessed light |
| Material | Steel |
| Colour | Alu |
| Type of surface | Matt |
| Shape | Square |
| Width | 83 mm |
| Built-in length | 74 mm |
| Built-in width | 74 mm |
| Installation depth | 56 mm |
| Hight | 3 mm |
| Weight | 0.222 kg |
| Conformance | CE, UKCA |

ELEU LED wall recessed light

Article no. P3730B

| Lighting technology | |
|------------------------------|-----------|
| Colour temperature | blau |
| Luminous flux | 20 lm |
| System efficiency | 17 lm/W |
| Colour rendering | CRI > 80 |
| Reflector | Without |
| Light sharing | Symmetric |
| Adjustable color temperature | No |

| Operating technology of the luminaire | |
|---------------------------------------|--|
| System output | 1.2 W |
| Voltage type | DC |
| Current | 350 mA |
| Lamp | LED |
| Lamp holder | Plug&Play |
| Protection class | III |
| Degree of protection | IP20 |
| Dimmable | Depending on type of control gear |
| Control | Depending on driver |
| Bulb change possible | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |
| Energy efficiency class | nicht erforderlich |

| Mounting technology | |
|-----------------------|---|
| Mounting method | Recessed mounting |
| Place of installation | Wall-mounted |
| Adjustability | Not adjustable |
| Further references | No cover with thermal insulation material |
| Material cover | Glass opal |

| Packing data | |
|-------------------------|--|
| Gross weight | 0.272 kg |
| Length of packaging | 115 mm |
| Packaging width | 85 mm |
| Packaging height | 85 mm |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |

ELEU LED wall recessed light

Article no. P3730B

Required accessories

Article no.: 17666000

LED converter 350 mA, on/off switchable

Power: 1 - 5 W, Plug&Play

Dimensions: 52 mm x 30 mm x 23 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17666000_2021_DE.pdf

Article no.: 17662020

LED converter 350 mA, on/off switchable

Power: 1 - 7,2 W, Plug&Play + Anschlussbox

Dimensions: 68 mm x 35 mm x 21 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf

Article no.: 17613000

LED converter 350 mA, on/off switchable

Power: 1 - 15 W, Plug&Play

Dimensions: 115 mm x 34 mm x 19 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf

Article no.: 17621020

LED converter 350 mA, on/off switchable

Power: 1 - 21 W, Plug&Play + Anschlussbox

Dimensions: 128 mm x 50 mm x 13 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf

Article no.: 17648020

LED converter 350 mA, trailing-edge phase dimmable

Power: 0,7 - 17 W, Plug&Play + Anschlussbox

Dimensions: 166 mm x 46 mm x 34 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17648020_2021_DE.pdf