


PRENTISS Ceiling recessed speaker, DA 68 mm
Article no. 3093.15

Light.
For Generations.

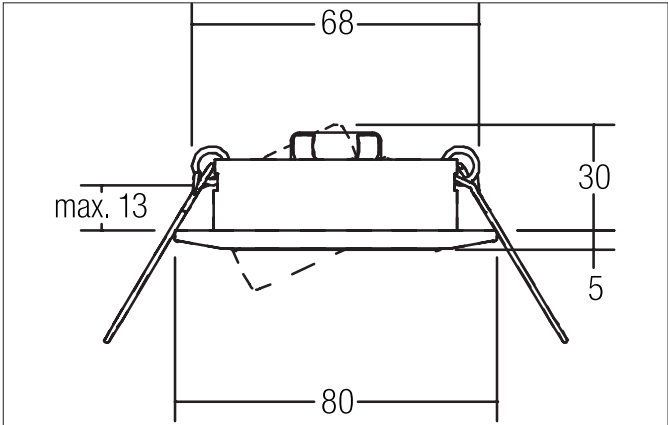

IP20

Tender	
Ceiling recessed speaker, DA 68 mm, nickel satin, Round.In a compact design, for installation in tool-less rapid assembly systems.Nominal / music load capacity: 3 / 4 W, impedance: 20 Ohm Up to 5 speakers can be connected in parallel to a channel of a Hifiampifier. Sound pressure level: 1 W / 1 m: 82 dB (at nominal output of 87 dB), Transmission range (-3 db): 200 - 16,000 Hz, Transmission range (-10 db): 150 - 20,000 Hz, Model: Front ring (steel) and perforated plate cover in white (.07) or chrome-metal-plated (.02 / .15), Net weight: 0.14 kg. Installation with built-in springs. Connection using 2-core cable with connecting terminals. Material: Steel Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Steel / Plastic, Degree of protection: according to DIN EN 60529 IP20, Adjustability: Pivoted.	

Article data	
Article no.	3093.15
GTIN	4250047728146
Series name	PRENTISS
Short description	Ceiling recessed speaker, DA 68 mm
Material	Steel
Colour	Nickel
Type of surface	Matt
Shape	Round
Outer diameter	80 mm
Built-in diameter	68 mm
Installation depth	30 mm
Width	80 mm
Hight	5 mm
Weight	0.121 kg
Conformance	CE, UKCA

PRENTISS Ceiling recessed speaker, DA 68 mm
Article no. 3093.15

Light.
For Generations.

Packing data	
Gross weight	0.157 kg
Length of packaging	85 mm
Packaging width	43 mm
Packaging hight	84 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>