


LED power supply 24 V DC, on/off switchable

Article no. 17243000

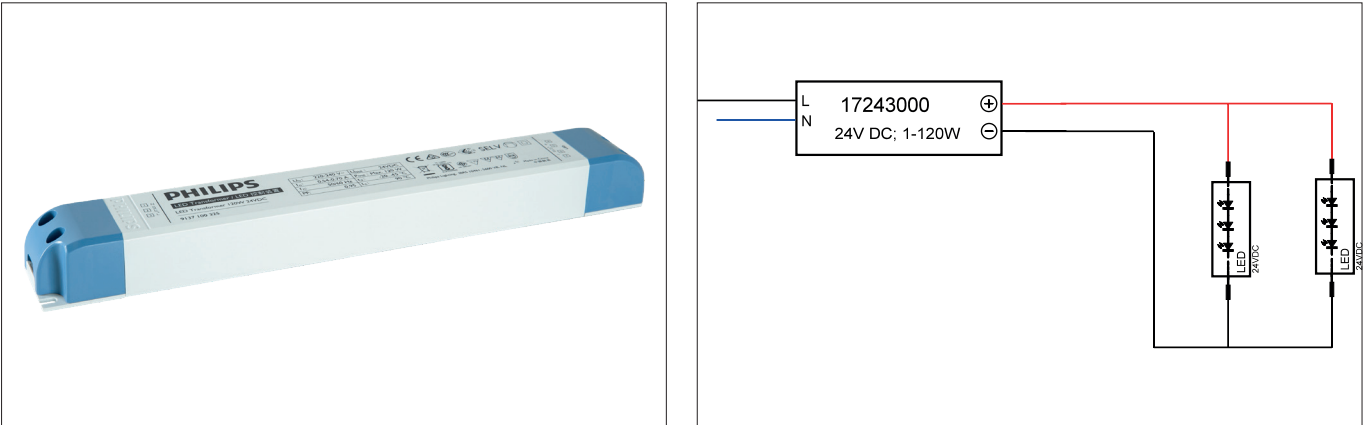

**Tender**  
LED power supply unit 24 V DC, switchable, white, rectangular. Material: Plastic, Protection rating on room side: to DIN EN 60529: IP20, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 120 W, Dimmable: No, Type of dimming: switchable.

| Article data      |                                             |
|-------------------|---------------------------------------------|
| Article no.       | 17243000                                    |
| GTIN              | 4251433939078                               |
| Short description | LED power supply 24 V DC, on/off switchable |
| Material          | Plastic                                     |
| Colour            | White                                       |
| Shape             | Rectangular                                 |
| Length            | 300 mm                                      |
| Width             | 40 mm                                       |
| Hight             | 30 mm                                       |
| Weight            | 0.431 kg                                    |
| stamp             | ENEC, MM                                    |
| Conformance       | CE                                          |

**LED power supply 24 V DC, on/off switchable**

Article no. 17243000

| Operating technology of driver  |                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| AC nominal voltage min          | 220 V                                                                                                                                                                                                                                                                                                                                                                          |
| AC nominal voltage max          | 240 V                                                                                                                                                                                                                                                                                                                                                                          |
| Frequency min                   | 50 Hz                                                                                                                                                                                                                                                                                                                                                                          |
| Frequency max                   | 60 Hz                                                                                                                                                                                                                                                                                                                                                                          |
| Protection class                | II                                                                                                                                                                                                                                                                                                                                                                             |
| Degree of protection            | IP20                                                                                                                                                                                                                                                                                                                                                                           |
| Power min                       | 1 W                                                                                                                                                                                                                                                                                                                                                                            |
| Power max.                      | 120 W                                                                                                                                                                                                                                                                                                                                                                          |
| Output_ripple_current           | 3                                                                                                                                                                                                                                                                                                                                                                              |
| Starting current                | 35 A, 320 µs                                                                                                                                                                                                                                                                                                                                                                   |
| Suitable for emergency lighting | No                                                                                                                                                                                                                                                                                                                                                                             |
| measure point (tc)              | 90 °C                                                                                                                                                                                                                                                                                                                                                                          |
| Power factor                    | 0.98                                                                                                                                                                                                                                                                                                                                                                           |
| max. no. lights on B10 A        | 7                                                                                                                                                                                                                                                                                                                                                                              |
| max. no. lights on B16 A        | 12                                                                                                                                                                                                                                                                                                                                                                             |
| max. no. lights on C16 A        | 20                                                                                                                                                                                                                                                                                                                                                                             |
| max. no. lights on C10 A        | 12                                                                                                                                                                                                                                                                                                                                                                             |
| Output voltage max              | 25.20 V                                                                                                                                                                                                                                                                                                                                                                        |
| Output voltage min.             | 22.80 V                                                                                                                                                                                                                                                                                                                                                                        |
| Control                         | on/off                                                                                                                                                                                                                                                                                                                                                                         |
| Connection type-primary         | Screw-in connection                                                                                                                                                                                                                                                                                                                                                            |
| Connection type-secondary       | Screwed terminal                                                                                                                                                                                                                                                                                                                                                               |
| Number of poles                 | 2                                                                                                                                                                                                                                                                                                                                                                              |
| Environment temperature (ta)    | -20°C up to +45°C                                                                                                                                                                                                                                                                                                                                                              |
| Measure point (tc)              | max. +90°C                                                                                                                                                                                                                                                                                                                                                                     |
| Average nominal lifespan        | 50000 h                                                                                                                                                                                                                                                                                                                                                                        |
| Packing data                    |                                                                                                                                                                                                                                                                                                                                                                                |
| Gross weight                    | 0.47 kg                                                                                                                                                                                                                                                                                                                                                                        |
| Length of packaging             | 45 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Packaging width                 | 35 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Packaging height                | 330 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Disposal at end of life         | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |