
BREENA-R Recessed spot, GU10

Article no. 36141080





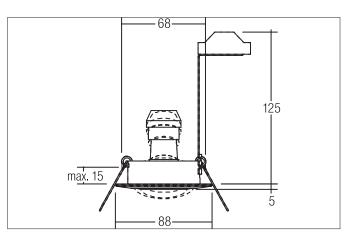

Tender

Recessed spotlight, GU10, matt black, round. Designed in a compact form for quick, tool-free installation in the ceiling. Incl. bracket with GU10 socket for standard-compliant strain relief. Version: GU10, Mounting type: recessed mounting, Mounting location: ceiling mounting, Material: cast zinc / cast aluminum, Protection rating on room side: to DIN EN 60529: IP20, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 10 W, Number of bulbs / sockets: 1 piece, Adjustability: swivel, without control gear, Type of dimming: other.

Product Benefits

- Recessed spotlight in round design made of solid cast zinc and cast aluminum for LED retrofit lamps with GU10 base (incl. bracket for standardized strain relief). strain relief).
- Ceiling cut-out 68 mm, diameter 88 mm, installation depth 125 mm, IP20.
- Pivoting range 25°.
- Wide range of colors. Without visible snap ring.
- Classic, slightly curved design.
- Also available in the same look as a GX5.3 version, as a switchable and dimmable set (trailing edge).



BREENA-R Recessed spot, GU10

Article no. 36141080

| Article data | |
|--------------------|---------------------|
| Article no. | 36141080 |
| GTIN | 4251433953814 |
| Series name | BREENA-R |
| Short description | Recessed spot, GU10 |
| Material | Cast iron |
| Colour | Black |
| Type of surface | Matt |
| Shape | Round |
| Outer diameter | 88 mm |
| Built-in diameter | 68 mm |
| Installation depth | 125 mm |
| Hight | 5 mm |
| Weight | 0.125 kg |
| Conformance | CE, UKCA |

| Operating technology of the luminaire | |
|---------------------------------------|------------------------|
| System output | 10 W |
| Voltage type | AC |
| AC nominal voltage max | 230 V |
| Frequency max | 50 Hz |
| Lamp | For LED-retrofill lamp |
| Lamp holder | GU10 |
| Protection class | |
| Degree of protection | IP20 |
| Control | Other |
| Bulb change possible | Yes |
| Energy efficiency class | nicht erforderlich |

| Mounting technology | |
|------------------------|---|
| Mounting method | Recessed mounting |
| Place of installation | Ceiling-mounted |
| Adjustability | Pivoted |
| Swivel angle | 25° |
| Max. ceiling thickness | 15 mm |
| Further references | No mounting box No cover with thermal insulation material |
| Material cover | Without cover |
| Circlip | Without circlip |

| Packing data | |
|-------------------------|--|
| Gross weight | 0.185 kg |
| Length of packaging | 140 mm |
| Packaging width | 110 mm |
| Packaging hight | 120 mm |
| Disposal at end of life | This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. |
| | By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment. |

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 24.04.2025 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/



BREENA-R Recessed spot, GU10

Article no. 36141080

| Optional accessories | |
|---|--|
| Article no.: 81204080 | |
| Reducing ring D 110 mm, for luminaire cut-out size 68 mm | |
| | |
| https://www.brumberg.com/fileadmin/products/Datenblatt_81204080_2021_DE.pdf | |
| Article no.: 81205080 | |
| Reducing ring D 130 mm, for luminaire cut-out size 68 mm | |
| | |
| https://www.brumberg.com/fileadmin/products/Datenblatt_81205080_2021_DE.pdf | |
| Article no.: 81206080 | |
| Reducing ring D 145 mm, for luminaire cut-out size 68 mm | |
| | |

https://www.brumberg.com/fileadmin/products/Datenblatt_81206080_2021_DE.pdf