
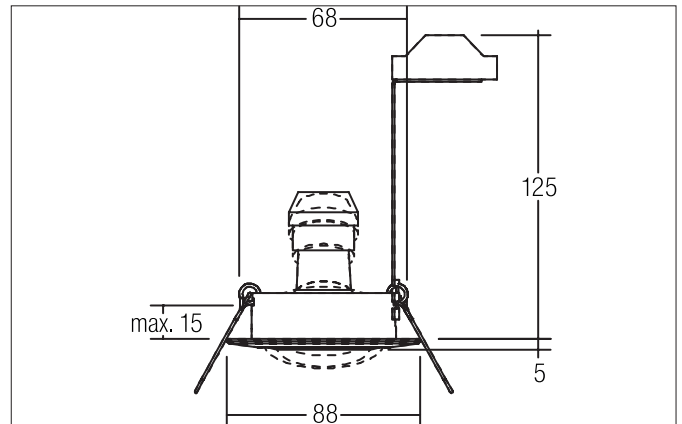


BREENA-R Recessed spot, GU10

Article no. 36141150


Tender

Recessed spotlight, GU10, matt nickel, round. Designed in a compact design for tool-free quick installation in the ceiling. Incl. bracket with GU10 socket for standard-compliant strain relief. Version: GU10, Mounting type: recessed mounting, Mounting location: ceiling mounting, Material: cast zinc / cast aluminum, Protection rating on room side: to DIN EN 60529: IP20, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 10 W, Number of bulbs / sockets: 1 piece, Adjustability: swivel, without control gear, Type of dimming: other.

Product Benefits

- Recessed spotlight in round design made of solid cast zinc and cast aluminum for LED retrofit lamps with GU10 base (incl. bracket for standardized strain relief). strain relief).
- Ceiling cut-out 68 mm, diameter 88 mm, installation depth 125 mm, IP20.
- Pivoting range 25°.
- Wide range of colors. Without visible snap ring.
- Classic, slightly curved design.
- Also available in the same look as a GX5.3 version, as a switchable and dimmable set (trailing edge).

BREENA-R Recessed spot, GU10

Article no. 36141150

| Article data | |
|--------------------|---------------------|
| Article no. | 36141150 |
| GTIN | 4250047780403 |
| Series name | BREENA-R |
| Short description | Recessed spot, GU10 |
| Material | Cast iron |
| Colour | Nickel |
| Type of surface | Matt |
| Shape | Round |
| Outer diameter | 88 mm |
| Built-in diameter | 68 mm |
| Installation depth | 125 mm |
| Hight | 5 mm |
| Weight | 0.138 kg |
| Conformance | CE, UKCA |

| Operating technology of the luminaire | |
|---------------------------------------|------------------------|
| System output | 10 W |
| Voltage type | AC |
| AC nominal voltage max | 230 V |
| Frequency max | 50 Hz |
| Lamp | For LED-retrofill lamp |
| Lamp holder | GU10 |
| Protection class | II |
| Degree of protection | IP20 |
| Control | Other |
| Bulb change possible | Yes |
| Energy efficiency class | nicht erforderlich |

| Mounting technology | |
|------------------------|---|
| Mounting method | Recessed mounting |
| Place of installation | Ceiling-mounted |
| Adjustability | Pivoted |
| Swivel angle | 25° |
| Max. ceiling thickness | 15 mm |
| Further references | No mounting box No cover with thermal insulation material |
| Material cover | Without cover |
| Circlip | Without circlip |

| Packing data | |
|-------------------------|--|
| Gross weight | 0.28 kg |
| Length of packaging | 140 mm |
| Packaging width | 110 mm |
| Packaging height | 120 mm |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |

BREENA-R Recessed spot, GU 10

Article no. 36141150

Optional accessories

Article no.: 81204150

Reducing ring D 110 mm, for luminaire cut-out size 68 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_81204150_2021_DE.pdf

Article no.: 81205150

Reducing ring D 130 mm, for luminaire cut-out size 68 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_81205150_2021_DE.pdf

Article no.: 81206150

Reducing ring D 145 mm, for luminaire cut-out size 68 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_81206150_2021_DE.pdf