



ILIA LED bollard luminaire, IP54

Article no. 65222103





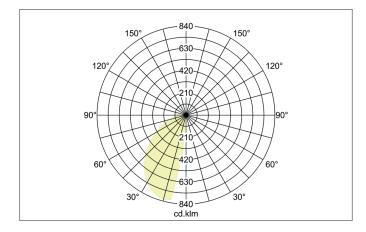



Tender

LED bollard luminaire, IP54, Rectangular.Luminaire length 40.0 mm, Luminaire width 120.0 mm, Hight 650.0 mm Weight 1.784 kg, with rotattionssymmetrical, deep, wide distributed light intensity.. Luminous flux 243 lm, Power 1 x 7 W, Light colour warm white to warm white, Correlated color temprature (CCT) 3.000 - 3.000 K, Colour rendering index CRI > 80, Housing material: Aluminium / Glass / Plastic, Colour: Graphite structure, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP54. With electronic driver, on/off switchable.

| Article data | |
|-------------------|---|
| Article no. | 65222103 |
| GTIN | 4251433982487 |
| Series name | ILIA |
| Short description | LED bollard luminaire, IP54 |
| Material | Aluminium / Glass / Plastic |
| Colour | Graphite |
| Type of surface | Structure |
| Shape | Rectangular |
| Length | 40 mm |
| Width | 120 mm |
| Hight | 650 mm |
| Scope of delivery | incl. converter for connection to 230 V mains voltage, switchable |
| Weight | 1.784 kg |
| Conformance | CE, UKCA |



ILIA LED bollard luminaire, IP54

Article no. 65222103

| Lighting technology | |
|------------------------------|---------------|
| Colour temperature | 3.000 K |
| Light colour | White |
| Light output | Direct |
| Luminous flux | 243 lm |
| System efficiency | 35 lm/W |
| McAdam-Step | McAdam-Step 6 |
| Colour rendering | CRI > 80 |
| Light sharing | Symmetric |
| Adjustable color temperature | No |

| Operating technology of the luminaire | |
|---------------------------------------|--|
| System output | 7 W |
| Voltage type | AC |
| AC nominal voltage max | 230 V |
| Frequency max | 50 Hz |
| Frequency min | 50 Hz |
| Lamp | LED |
| Lamp holder | Without fitting |
| Protection class | |
| Degree of protection | IP54 |
| Control | on/off |
| Bulb change possible | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |

| Mounting technology | |
|-----------------------|------------------|
| Mounting method | Surface mounting |
| Place of installation | Floor-mounted |
| Adjustability | Not adjustable |
| Further references | Outdoor |

| Packing data | |
|-------------------------|--|
| Gross weight | 2.388 kg |
| Length of packaging | 720 mm |
| Packaging width | 170 mm |
| Packaging hight | 130 mm |
| | This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. |
| Disposal at end of life | By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment. |