
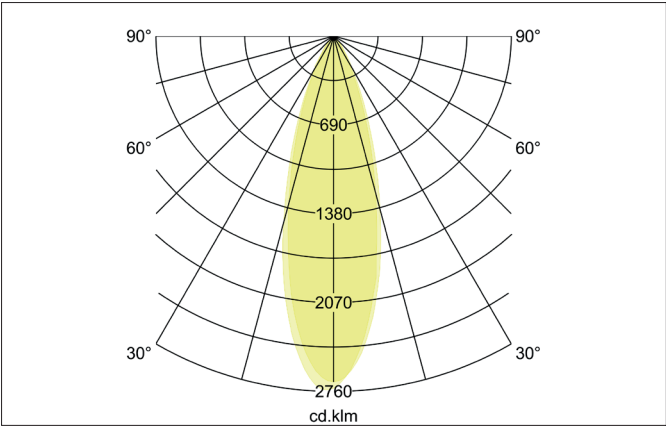
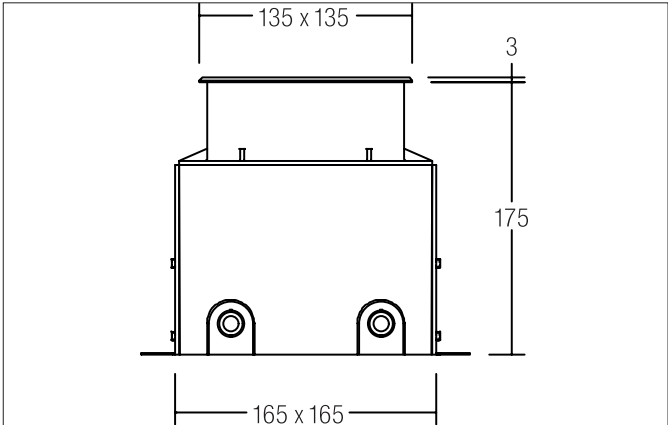


HYBRIDE LED-floor recessed spot, V4A, IP67
Article no. 14678223

Light.
For Generations.

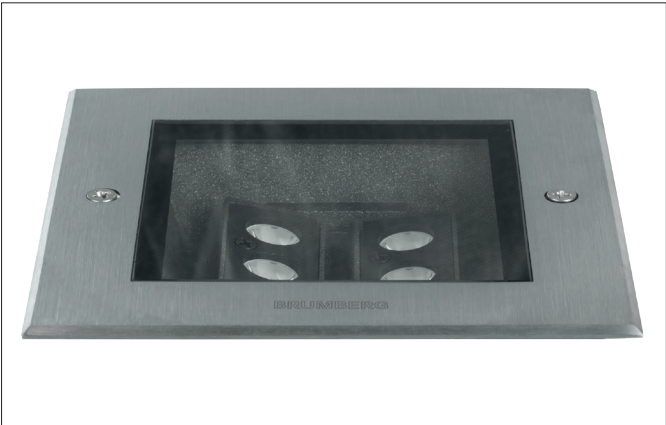

Tender	
LED-floor recessed spot, V4A, IP67, Square. Ceiling cut-out L x W 165 x 165 mm, Installation depth 175 mm, Length 135 mm, Width 135 mm, Weight 3,292 kg, with rotationssymmetrical, deep, wide distributed light intensity. optimal light distribution due to a glass transparent cover.Luminous flux 670 lm, Power 2 x 5,4 W, System Efficiency 124 lm/W, Light colour warm white, Correlated color temprature (CCT) 3.000 K, Colour rendering index CRI > 80, Housing material: Stainless steel / Aluminium / Glass, Colour: Stainless steel, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP67, shock resistance according to IEC62262: IK09 .With electronic driver, on/off switchable.	

Article data	
Article no.	14678223
GTIN	4251433917267
Series name	HYBRIDE
Short description	LED-floor recessed spot, V4A, IP67
Material	Stainless steel / Aluminium / Glass
Colour	Stainless steel
Shape	Square
Built-in width	165 mm
Built-in length	165 mm
Installation depth	175 mm
Length	135 mm
Width	135 mm
Scope of delivery	Incl. converter for connection to the 230-V mains voltage, on/off, 5,000 mm connecting cable, floor installation pot and adjustment tool
Weight	3.292 kg

HYBRIDE LED-floor recessed spot, V4A, IP67

Article no. 14678223

Light.
For Generations.

Lighting technology	
Colour temperature	3.000 K
Light colour	White
Luminous flux	670 lm
System efficiency	124 lm/W
Colour rendering	CRI > 80
Reflector	Without
Beam angle	30°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	5.4 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Lamp	LED
Lamp holder	Without fitting
Protection class	I
Degree of protection	IP67
Control	on/off
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Floor-mounted
Adjustability	Pivoted
Max. load	1,000 kg
Over rollable	No
Impact resistance	IK09
stamp	UKCA
Further references	V4A
Material cover	Glass transparent
Suitable for through-wiring	Yes

Packing data	
Gross weight	3.702 kg
Length of packaging	300 mm
Packaging width	300 mm
Packaging height	180 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.