




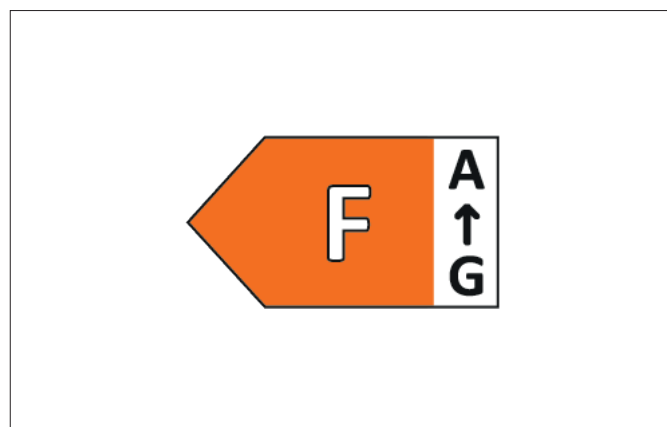

QUALITYFLEX ONE LED-Flexplatine 5 m, CRI > 80, 14,4 W / m, IP00

Article no. 38203027

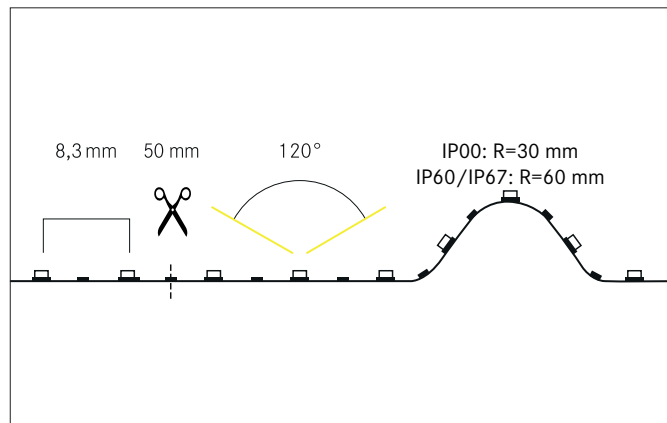

Tender

Flex lighting 5 m, CRI > 80, 14,4 W / m, IP00, 2.700K, CRI > 80. LED flex lighting Length: 5000.0 mm Lamp power per meter: 14.4 W/m, Luminous flux per meter: 1271.0 lm/m, Degree of protection: IP00, Protection class: III, Voltage: 24V DC, Beam angle: 120.0 °, 120 LEDs per meter, Chip distance (Short Pitch) : 8,3mm. For individual application, the LED flex board can be used all 50 mm be cut back. The maximum system length of 5.000mm must not be exceeded with one feed-in.

Product Benefits

- Geeignet für Anwendungen im Innenbereich (IP00).
- Direkte Beleuchtung von Arbeitsflächen (z.B.: in der Küche).
- Indirekte Beleuchtung in Wohnbereichen.
- Länge 5.000 mm mit einem Teilungsmaß von 50 mm.
- Farbkonsistenz SDCM < 3.
- Verfügbar in 2.700 K, 3.000 K und 4.000 K.
- Dimmbar mit entsprechendem Zubehör.


QUALITYFLEX ONE LED-Flexplatine 5 m, CRI > 80, 14,4 W / m, IP00

Article no. 38203027

| Article data | |
|-------------------------------|---|
| Article no. | 38203027 |
| GTIN | 4251433941873 |
| Series name | QUALITYFLEX ONE |
| Short description | LED-Flexplatine 5 m, CRI > 80, 14,4 W / m, IP00 |
| Colour | white |
| Length | 5,000 mm |
| Width | 8 mm |
| Hight | 1.2 mm |
| Scope of delivery | inkl. 1 x Montageanleitung, 5 x Kennzeichnungsetiketten |
| Weight | 0.108 kg |
| Length of the connection line | 300 mm |
| Conformance | CE, UKCA |

| Lighting technology | |
|------------------------------|---------------|
| Colour temperature | 2.700 K |
| Light colour | white |
| Luminous flux per meter | 1,271 lm/m |
| System efficiency | 88 lm/W |
| McAdam-Step | McAdam-Step 3 |
| Colour rendering | CRI > 80 |
| Beam angle | 120° |
| Adjustable color temperature | No |

| Operating technology of the luminaire | |
|---------------------------------------|--------------------------------|
| System output | 72 W |
| Lamp power per meter | 14.4 W/m |
| Voltage type | DC |
| DC nominal voltage max | 24 V |
| Lamp | LED |
| Protection class | III |
| Degree of protection | IP00 |
| Ambient temperature | -10 °C bis +40 °C |
| Dimmable | Yes |
| Wire number | 2 |
| Control | Depending on driver |
| Length of the connection line | 300 mm |
| Cable assignment | rot = + pol schwarz = - pol |
| Design of the connecting cable | beidseitig |
| Bulb change possible | No |
| Rated life time L70/B50 at 25 °C | 54,000 h |
| Rated life time L80/B10 at 25 °C | 50.000 h |
| Rated life time L80/B20 at 25 °C | 51.000 h |
| Energy efficiency class | F |

| Operating technology of QualityFlex | |
|-------------------------------------|---------------------|
| Power per meter | 14.4 W/m |
| Short Pitch | 8.3 mm |
| Number of lamps per meter | 120 Qty |
| Length of individual sections | 50 mm |
| Smallest bend radius | 30 mm |
| Length | 5,000 mm |
| Maximum module length | 5,000 mm |
| Circuit type | Parallel conduction |
| LED Type | 2835 LED |


QUALITYFLEX ONE LED-Flexplatine 5 m, CRI > 80, 14,4 W / m, IP00

Article no. 38203027

| Packing data | |
|-------------------------|--|
| Gross weight | 0.168 kg |
| Length of packaging | 260 mm |
| Packaging width | 215 mm |
| Packaging height | 10 mm |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |

| Compatible Driver | | | | | | |
|-------------------|-----------|-------|---------------------|--------|--------|--------|
| Article no. | Power min | Power | Control | Length | Width | Height |
| 17206000 | 1 W | 20 W | 1-10 V | 146 mm | 55 mm | 19 mm |
| 17207000 | 1 W | 30 W | on/off | 160 mm | 50 mm | 22 mm |
| 17214000 | 1 W | 7.2 W | on/off | 68 mm | 35 mm | 21 mm |
| 17223000 | 1 W | 75 W | on/off | 185 mm | 60 mm | 31 mm |
| 17224000 | 1 W | 100 W | on/off | 199 mm | 63 mm | 36 mm |
| 17225000 | 1 W | 150 W | on/off | 219 mm | 63 mm | 36 mm |
| 17226000 | 1 W | 240 W | on/off | 244 mm | 71 mm | 38 mm |
| 17227000 | 1 W | 320 W | on/off | 252 mm | 90 mm | 44 mm |
| 17228000 | 1 W | 480 W | on/off | 262 mm | 125 mm | 44 mm |
| 17230000 | 5 W | 30 W | Trailing-edge phase | 145 mm | 50 mm | 22 mm |
| 17231000 | 12 W | 75 W | Trailing-edge phase | 185 mm | 60 mm | 31 mm |
| 17232000 | 12 W | 120 W | Trailing-edge phase | 223 mm | 64 mm | 32 mm |
| 17240000 | 1 W | 20 W | on/off | 150 mm | 40 mm | 30 mm |
| 17241000 | 1 W | 40 W | on/off | 210 mm | 40 mm | 30 mm |
| 17242000 | 1 W | 60 W | on/off | 250 mm | 40 mm | 30 mm |
| 17243000 | 1 W | 120 W | on/off | 300 mm | 40 mm | 30 mm |
| 17244000 | 1 W | 150 W | on/off | 310 mm | 40 mm | 30 mm |
| 17250000 | 1 W | 45 W | DALI-2 | 187 mm | 45 mm | 31 mm |
| 17251000 | 1 W | 80 W | DALI-2 | 290 mm | 45 mm | 31 mm |
| 17252000 | 1 W | 150 W | DALI-2 | 290 mm | 45 mm | 31 mm |
| 17260000 | 1 W | 150 W | on/off | 105 mm | 90 mm | 59 mm |

| Compatible Controller | | | | | | |
|-----------------------|-----------|-------|-----------------------------|--------|---------|--------|
| Article no. | Power min | Power | Control | Length | Width | Height |
| 17502000 | 1 W | 120 W | DALI | 183 mm | 33 mm | 23 mm |
| 18151000 | 1 W | 240 W | KNX | 170 mm | 59 mm | 30 mm |
| 18152000 | 1 W | 240 W | DALI-DT6 | 170 mm | 59 mm | 30 mm |
| 18153000 | 1 W | 240 W | DMX | 170 mm | 59 mm | 30 mm |
| 18154000 | 1 W | 240 W | 1-10 V | 170 mm | 59 mm | 30 mm |
| 18161000 | 1 W | 240 W | KNX | 72 mm | 90 mm | 70 mm |
| 18162000 | 1 W | 240 W | DALI-DT6 | 54 mm | 110 mm | 66 mm |
| 18164000 | 1 W | 240 W | 1-10 V | 54 mm | 110 mm | 66 mm |
| 17528000 | 1 W | 240 W | Wireless technology control | | | |
| 17511000 | 120 W | 240 W | Wireless technology control | 145 mm | 46.5 mm | 16 mm |
| 18157000 | 1 W | 240 W | ZigBee | 145 mm | 46.5 mm | 16 mm |
| 18192000 | 1 W | 240 W | Wireless technology control | 160 mm | 45 mm | 18 mm |


QUALITYFLEX ONE LED-Flexplatine 5 m, CRI > 80, 14,4 W / m, IP00

Article no. 38203027

| Compatible Profiles | | | | |
|--|-------------|----------|---------|----------|
| Short description | Series name | Length | Width | Hight |
| Recessed profile 53654070 | P36-20 | 2,000 mm | 30 mm | 20.4 mm |
| LED recessed profile 53759070 | P40-30 | 2,000 mm | 44.4 mm | 24 mm |
| Wall recessed profile 53650260 | P32-12 | 2,000 mm | 19.1 mm | 81 mm |
| Plaster profile 53655070 | P37-30 | 2,000 mm | 63.4 mm | 15.9 mm |
| Plaster profile 53656070 | P38-30 | 2,000 mm | 63.4 mm | 24 mm |
| Surface-mounted profile 53600070 | P01-10 | 2,000 mm | 20 mm | 8 mm |
| Surface-mounted profile 53602070 | P04-14 | 2,000 mm | 24 mm | 9 mm |
| Surface-mounted profile 53603070 | P06-20 | 2,000 mm | 23 mm | 25.1 mm |
| LED surface-mounted profile 53606070 | P30-30 | 2,000 mm | 33.4 mm | 29.6 mm |
| Surface-mounted profile 53607080 | P16-16 | 2,000 mm | 18.8 mm | 18.6 mm |
| Surface-mounted profile, flat 53380261 | ONE | | 17.6 mm | 6 mm |
| Surface-mounted profile, high 53381302 | ONE | | 17.6 mm | 15.9 mm |
| Surface-mounted corner profile 53700070 | P60-10 | 2,000 mm | 20 mm | 16 mm |
| Surface-mounted corner profile 53702070 | P62-14 | 2,000 mm | 24 mm | 19.4 mm |
| Surface-mounted corner profile 53703260 | P63-14 | 2,000 mm | 17.5 mm | 17.5 mm |
| Surface-mounted corner profile 53385261 | ONE | | 24 mm | 19.4 mm |
| Flexible profile 53753260 | P72-12 | 2,000 mm | 20 mm | 3.3 mm |
| Wall surface-mounted profile 53754070 | P73-12 | 2,000 mm | 17.8 mm | 46.1 mm |
| Wall surface-mounted profile 53751260 | P74-14 | 2,000 mm | 18.5 mm | 55 mm |
| Flat profile P76-16 53756070 | P76-16 | 2,000 mm | 20.5 mm | 3.8 mm |
| Surface-mounted round profile 53760260 | P90-16 | 2,000 mm | 20 mm | 17.04 mm |