


**JAVA LED-floor recessed light, IP67**  
Article no. 14011223

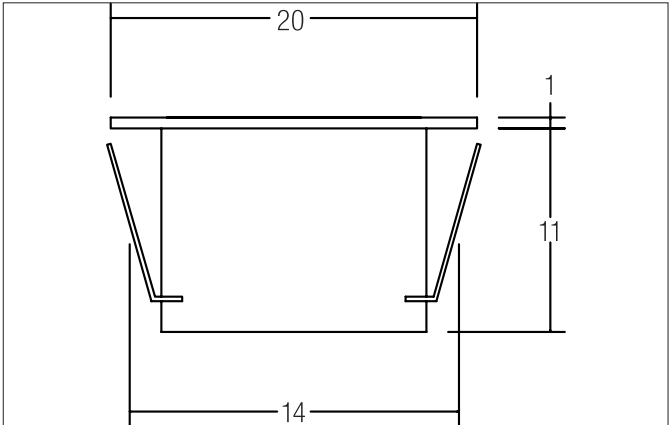

Tender	
Round LED recessed floor light, 12 V DC, IP67, ceiling cut-out Ø 14 mm, installation depth 11 mm, outer diameter 20 mm, weight 0.062 kg, with rotationally symmetrical narrow-wide beam light distribution. Opal plastic cover, rated wattage 1 x 0.15 W, warm white light color, most similar color temperature (CCT) 3,000 K, general color rendering index CRI > 80, housing material: stainless steel / aluminum / glass, color: stainless steel, permissible ambient temperature (ta): -20 °C - +25 °C, protection class (EN 61140): III, degree of protection (DIN EN 60529): IP67. For connection to an external control gear, which is not included with the luminaire. Dimmable depending on the control gear.	

Article data	
Article no.	14011223
GTIN	4250047768340
Series name	JAVA
Short description	LED-floor recessed light, IP67
Material	Stainless steel / Aluminium / Glass
Colour	Stainless steel
Shape	Round
Outer diameter	20 mm
Built-in diameter	14 mm
Installation depth	11 mm
Scope of delivery	Incl. 5,000 mm connecting cable
Weight	0.062 kg
Conformance	CE, UKCA

**JAVA LED-floor recessed light, IP67**

Article no. 14011223

Lighting technology	
Colour temperature	3.000 K
Light colour	White
System efficiency	0 lm/W
Colour rendering	CRI > 80
Reflector	Without
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
Voltage type	DC
Lamp	LED
Lamp holder	Without fitting
Protection class	III
Degree of protection	IP67
Control	Depending on driver
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Energy efficiency class	nicht erforderlich

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Floor-mounted
Adjustability	Not adjustable
Over rollable	No
Material cover	Plastic, opal
Suitable for through-wiring	No

Packing data	
Gross weight	0.078 kg
Length of packaging	85 mm
Packaging width	35 mm
Packaging height	85 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>

Required accessories	
Article no.: 3506 LED power supply 12 V DC, 1-10 V dimmable (analog) Power: 0 - 20 W Dimensions: 145 mm x 55 mm x 19 mm <a href="https://www.brumberg.com/fileadmin/products/Datenblatt_00003506_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_00003506_2021_DE.pdf</a>	
Article no.: 17121000 LED power supply 12 V DC, on/off switchable Power: 1 - 60 W Dimensions: 180 mm x 63 mm x 36 mm <a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17121000_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17121000_2021_DE.pdf</a>	
Article no.: 17122000 LED power supply 12 V DC, on/off switchable Power: 1 - 120 W Dimensions: 219 mm x 63 mm x 36 mm <a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17122000_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17122000_2021_DE.pdf</a>	