


**BIRO CIRCLE LED pendant ring luminaire, direct/indirect, dimmable**  
Article no. 13856174

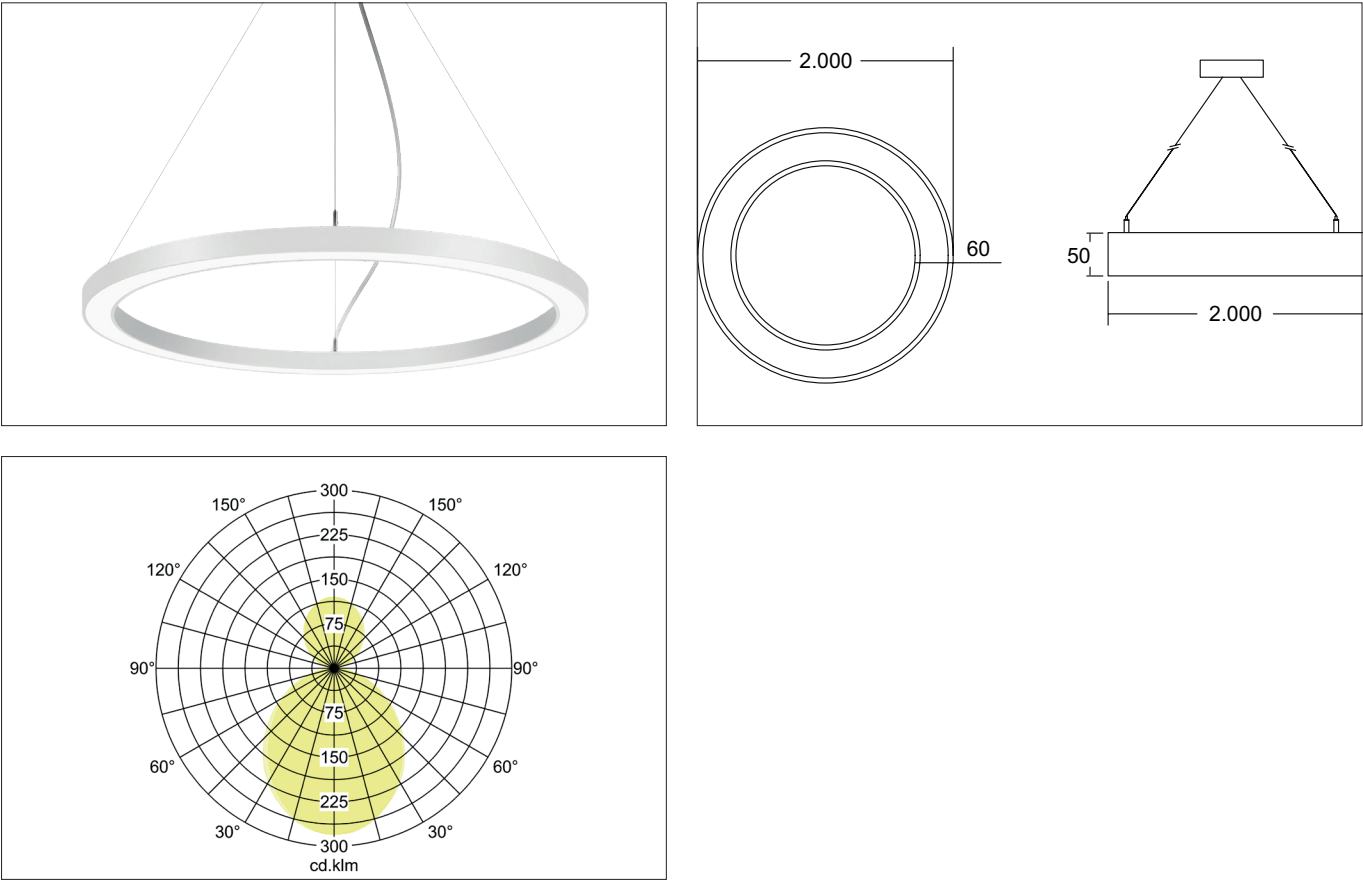

**Tender**  
LED pendant ring luminaire, direct/indirect, dimmable, Round.Luminaire diameter 2000.0 mm, Hight 50.0 mm, for pendulum mounting. Pendulum length max. 5000.0 mm Weight 15.0 kg, with rotationssymmetrical, deep, wide distributed light intensity. Cover plastic, opal. Luminous flux 24.484 lm, Power 1 x 201 W, Light colour neutral white, Correlated color temprature (CCT) 4.000 K, Colour rendering index CRI > 80, Rated life time L70/B50 at 25 °C: 276.000 h, Rated life time L80/B20 at 25 °C: 153.000 h, Housing material: Aluminium / Steel / Plastic, Colour: White structure, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP20. With electronic driver, DALI-DT6 dimmable.

| Article data      |   |
|-------------------|---|
| Article no.       | 13856174  |
| GTIN              | 4251433968931   |
| Series name       | BIRO CIRCLE   |
| Short description | LED pendant ring luminaire, direct/indirect, dimmable |
| Material          | Aluminium / Steel / Plastic                           |
| Colour            | White   |
| Type of surface   | Structure   |
| Shape             | Round   |
| Outer diameter    | 2000 mm   |
| Hight             | 50 mm   |
| Scope of delivery | incl. converter for connection to 230 V mains voltage |
| Weight            | 15.000 kg   |
| Conformance       | CE, UKCA  |

**BIRO CIRCLE LED pendant ring luminaire, direct/indirect, dimmable**

Article no. 13856174

| Lighting technology                         |                 |
|---|-----------------|
| Colour temperature                          | 4.000 K         |
| Light colour                                | White           |
| Light output                                | Direct/Indirect |
| Luminous flux                               | 24,484 lm       |
| Luminous flux component (direct / indirect) | 70/30 %         |
| System efficiency                           | 122 lm/W        |
| McAdam-Step                                 | McAdam-Step 3   |
| Colour rendering                            | CRI > 80        |
| Reflector                                   | Without         |
| Beam angle                                  | 110°            |
| Light sharing                               | Symmetric       |
| Adjustable color temperature                | No              |

| Operating technology of the luminaire |  |
|---------------------------------------|--|
| System output                         | 201 W  |
| Voltage type                          | AC   |
| AC nominal voltage max                | 230 V  |
| Frequency max                         | 50 Hz  |
| Lamp                                  | LED  |
| Lamp holder                           | Without fitting  |
| Protection class                      | I  |
| Degree of protection                  | IP20   |
| Control                               | DALI-DT6   |
| Bulb change possible                  | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |
| Rated life time L70/B50 at 25 °C      | 276,000 h  |
| Rated life time L80/B20 at 25 °C      | 153.000 h  |
| Rated life time L90/B10 at 25 °C      | 74.000 h   |

| Mounting technology              |                 |
|----------------------------------|-----------------|
| Mounting method                  | Suspended       |
| Place of installation            | Ceiling-mounted |
| Adjustability                    | Not adjustable  |
| Pendulum length max.             | 5,000 mm        |
| Pendant length single suspension | 500 - 5.000 mm  |
| Pendulum length centre canopy    | 1000 - 10000 mm |
| Number of cable suspensions      | 6               |
| Material cover                   | Plastic, opal   |

| Packing data            |  |
|-------------------------|--|
| Gross weight            | 17 kg  |
| Length of packaging     | 2,030 mm   |
| Packaging width         | 2,030 mm   |
| Packaging height        | 60 mm  |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |