
Article no. 12266073

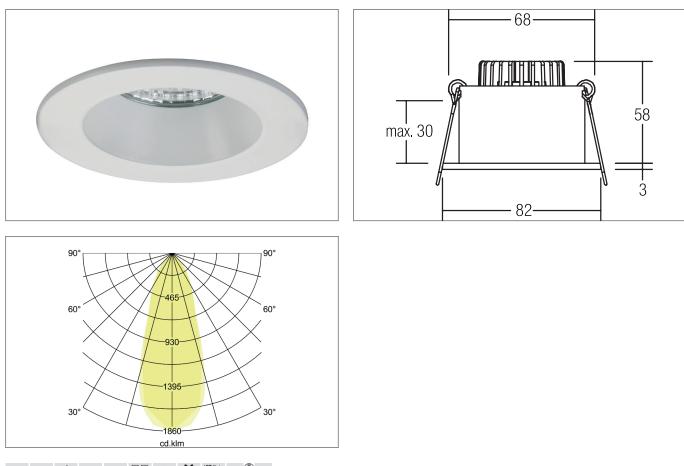

### Tender

LED recessed downlight, IP54, Round.Toolless ceiling installation by installation springs. Ceiling cut-out Ø 68 mm, Installation depth 58 mm, Outer diameter 82 mm, Weight 0,153 kg, Reflector silver with rotattionssymmetrical, deep, wide distributed light intensity. Cover glass transparent. Luminous flux 680 lm, Power 1 x 6 W, Light colour warm white, Correlated color temprature (CCT) 2.700 K, Colour rendering index CRI > 80, Housing material: Aluminium / Glass, Colour: White, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): III, Degree of protection (DIN EN 60529): IP54 when installing in closed ceilings. For connection to an external driver, which is not included in the scope of delivery of the luminaire. Depending on driver dimmable.

Article data	
Article no.	12266073
GTIN	4250047785040
Series name	ETMESA-R
Short description	LED recessed downlight, IP54
Material	Aluminium / Glass
Colour	White
Type of surface	Matt
Shape	Round
Outer diameter	82 mm
Built-in diameter	68 mm
Installation depth	58 mm
Hight	3 mm
Weight	0.153 kg
Conformance	CE, UKCA

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 24.02.2025 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/

Article no. 12266073

Lighting technology	
Colour temperature	2.700 К
Light colour	White
Light output	Direct
Luminous flux	680 lm
System efficiency	113 lm/W
Colour rendering	CRI > 80
Reflector	Faceted
Reflector colour	silver
Beam angle	38°
Light sharing	Symmetric
Adjustable color temperature	No

**BRUMBERG** 

Light. Since 1873.

Operating technology of the luminaire	
System output	6 W
Voltage type	DC
Current	350 mA
Lamp	LED
Lamp holder	Plug&Play
Protection class	
Degree of protection	IP54
Protection class on the ceiling side	IP20
Dimmable	Depending on type of control gear
Control	Depending on driver
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service
buin change hossinie	technician commissioned by him or a similarly qualified person.

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Max. ceiling thickness	30 mm
Further references	No cover with thermal insulation material
Material cover	Glass transparent
Circlip	Without circlip
Suitable for through-wiring	Yes, with optional accessories

Packing data	
Gross weight	0.205 kg
Length of packaging	110 mm
Packaging width	95 mm
Packaging hight	80 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 24.02.2025 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/

Article no. 12266073

Required accessories
Article no.: 17662000
LED converter 350 mA, on/off switchable
Power: 1 - 7,2 W, Plug&Play
Dimensions: 68 mm x 35 mm x 21 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17662000_2021_DE.pdf
Article no.: 17662020
LED converter 350 mA, on/off switchable
Power: 1 - 7,2 W, Plug&Play + Anschlussbox
Dimensions: 68 mm x 35 mm x 21 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf
Article no.: 17613000
LED converter 350 mA, on/off switchable
Power: 1 - 15 W, Plug&Play
Dimensions: 115 mm x 34 mm x 19 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf
Article no.: 17613020
LED converter 350 mA, on/off switchable
Power: 1 - 15 W, Plug&Play + Anschlussbox
Dimensions: 115 mm x 34 mm x 19 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf
Article no.: 17621000
LED converter 350 mA, on/off switchable
Power: 1 - 21 W, Plug&Play
Dimensions: 128 mm x 50 mm x 13 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf
Article no.: 17621020
LED converter 350 mA, on/off switchable
Power: 1 - 21 W, Plug&Play + Anschlussbox
Dimensions: 128 mm x 50 mm x 13 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf
Article no.: 17663000
LED converter 350 mA, trailing-edge phase dimmable
Power: 2,8 - 7 W, Plug&Play
Dimensions: 110 mm x 50 mm x 19 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17663000_2021_DE.pdf
Article no.: 17663020
LED converter 350 mA, trailing-edge phase dimmable
Power: 2,8 - 7 W, Plug&Play + Anschlussbox
Dimensions: 110 mm x 50 mm x 19 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf
Article no.: 17652000
LED-round converter 350 mA, trailing-edge phase dimmer
Power: 4,9 - 7 W, Plug&Play
Dimensions: 51 mm x 24 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf
Article no.: 17652020
LED-round converter 350 mA, trailing-edge phase dimmer
Power: 4,9 - 7 W, Plug&Play + Anschlussbox
Dimensions: 51 mm x 24 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17652020_2021_DE.pdf

Article no. 12266073

Required accessories   Article no.: 17640000   .ED converter 350 mA, trailing-edge phase dimmable   Power: 4,2 - 10 W, Plug&Play   Dimensions: 102 mm x 38 mm x 21 mm   https://www.brumberg.com/fileadmin/products/Datenblatt_17640000_2021_DE.pdf   Article no.: 17640020   .ED converter 350 mA, trailing-edge phase dimmable   Power: 4,2 - 10 W, Plug&Play + Anschlussbox   Dimensions: 102 mm x 38 mm x 21 mm   https://www.brumberg.com/fileadmin/products/Datenblatt_17640020_2021_DE.pdf
LED converter 350 mA, trailing-edge phase dimmable Power: 4,2 - 10 W, Plug&Play Dimensions: 102 mm x 38 mm x 21 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17640000_2021_DE.pdf Article no.: 17640020 LED converter 350 mA, trailing-edge phase dimmable Power: 4,2 - 10 W, Plug&Play + Anschlussbox Dimensions: 102 mm x 38 mm x 21 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17640020_2021_DE.pdf
Power: 4,2 - 10 W, Plug&Play Dimensions: 102 mm x 38 mm x 21 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17640000_2021_DE.pdf Article no.: 17640020 .ED converter 350 mA, trailing-edge phase dimmable Power: 4,2 - 10 W, Plug&Play + Anschlussbox Dimensions: 102 mm x 38 mm x 21 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17640020_2021_DE.pdf
Dimensions: 102 mm x 38 mm x 21 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17640000_2021_DE.pdf Article no.: 17640020 .ED converter 350 mA, trailing-edge phase dimmable Power: 4,2 - 10 W, Plug&Play + Anschlussbox Dimensions: 102 mm x 38 mm x 21 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17640020_2021_DE.pdf
https://www.brumberg.com/fileadmin/products/Datenblatt_17640000_2021_DE.pdf Article no.: 17640020 .ED converter 350 mA, trailing-edge phase dimmable Power: 4,2 - 10 W, Plug&Play + Anschlussbox Dimensions: 102 mm x 38 mm x 21 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17640020_2021_DE.pdf
Article no.: 17640020 .ED converter 350 mA, trailing-edge phase dimmable Power: 4,2 - 10 W, Plug&Play + Anschlussbox Dimensions: 102 mm x 38 mm x 21 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17640020_2021_DE.pdf
ED converter 350 mA, trailing-edge phase dimmable Power: 4,2 - 10 W, Plug&Play + Anschlussbox Dimensions: 102 mm x 38 mm x 21 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17640020_2021_DE.pdf
Power: 4,2 - 10 W, Plug&Play + Anschlussbox Dimensions: 102 mm x 38 mm x 21 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17640020_2021_DE.pdf
Dimensions: 102 mm x 38 mm x 21 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17640020_2021_DE.pdf
https://www.brumberg.com/fileadmin/products/Datenblatt_17640020_2021_DE.pdf
\rticle no : 17648000
ED converter 350 mA, trailing-edge phase dimmable
Power: 0,7 - 17 W, Plug&Play
Dimensions: 166 mm x 46 mm x 34 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17648000_2021_DE.pdf
Article no.: 17648020
ED converter 350 mA, trailing-edge phase dimmable
Power: 0,7 - 17 W, Plug&Play + Anschlussbox
Dimensions: 166 mm x 46 mm x 34 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17648020_2021_DE.pdf
Article no.: 17657000
ED converter 350 mA, 1-10 V dimmable (analog)
Power: 5,2 - 18 W, Plug&Play
Dimensions: 110 mm x 52 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17657000_2021_DE.pdf
Article no.: 17684000
ED converter 350 mA, DALI dimmable (digital)
Power: 2,8 - 7 W, Plug&Play
Dimensions: 130 mm x 42 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17684000_2021_DE.pdf
Article no.: 17684020
ED converter 350 mA, DALI dimmable (digital)
Power: 2,8 - 7 W, Plug&Play + Anschlussbox
Dimensions: 130 mm x 42 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17684020_2021_DE.pdf
Article no.: 17658000
ED round converter 350 mA, DALI dimmable (digital)
Power: 2,1 - 9 W, Plug&Play
Dimensions: 56 mm x 25 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17658000_2021_DE.pdf
Article no.: 17658020
ED round converter 350 mA, DALI dimmable (digital)
Power: 2,1 - 9 W, Plug&Play + Anschlussbox
Dimensions: 56 mm x 25 mm
https://www.brumberg.com/fileadmin/products/Datenblatt 17658020 2021 DE.pdf
Article no.: 17683000
ED converter 350 mA, DALI dimmable (digital)
Power: 3,5 - 17 W, Plug&Play Dimensions: 110 mm x 52 mm x 22 mm
nttps://www.brumberg.com/fileadmin/products/Datenblatt_17683000_2021_DE.pdf

Article no. 12266073

Required accessories
Article no.: 17683020
LED converter 350 mA, DALI dimmable (digital)
Power: 3,5 - 17 W, Plug&Play + Anschlussbox
Dimensions: 110 mm x 52 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17683020_2021_DE.pdf
Article no.: 17671000
LED converter 350mA, ZigBee dimmable
Power: 3,5 - 18,5 W, Plug&Play
Dimensions: 146 mm x 44 mm x 30 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17671000_2021_DE.pdf
Article no.: 17671020
LED converter 350mA, ZigBee dimmable
Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox
Dimensions: 146 mm x 44 mm x 30 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf
Article no.: 17672000
LED converter 350mA, Casambi dimmable
Power: 3,5 - 18,5 W, Plug&Play
Dimensions: 146 mm x 44 mm x 30 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf
Article no.: 17672020
LED converter 350mA, Casambi dimmable
Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox
Dimensions: 146 mm x 44 mm x 30 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17672020_2021_DE.pdf
Optional accessories
Article no.: 3835
Plug & Play extension lead 350 mA
Dimensions: 500 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_00003835_2021_DE.pdf
Article no.: 3836
Plug & Play extension lead 350 mA
Dimensions: 1,000 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_00003836_2021_DE.pdf
Article no.: 3837
Plug & Play extension lead 350 mA
Dimensions: 2,000 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_00003837_2021_DE.pdf