



LED insert panel 620 x 620 mm

Article no. 12088003





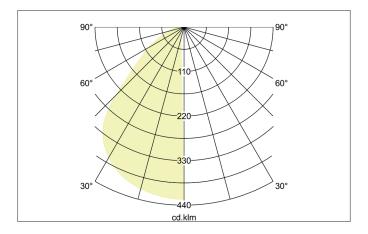



Tende

Square LED insert panel 620 x 620 mm, ceiling cut-out installation depth 12 mm, weight 3.426 kg, rated luminous flux 4,380 lm, UGR < 19, rated wattage 1 x 42 W, light color warm white, most similar color temperature (CCT) 3,000 K, general color rendering index CRI > 80, housing material: aluminum / polycarbonate, color: white, permissible ambient temperature (ta): -20 °C - +25 °C, protection class (EN 61140): II, degree of protection (DIN EN 60529): IP20. For connection to an external control gear, which is not included with the luminaire. switchable.

| Article data | |
|--------------------|-------------------------------|
| Article no. | 12088003 |
| GTIN | 4251433920366 |
| Short description | LED insert panel 620 x 620 mm |
| Material | Aluminium / Polycarbonate |
| Colour | White |
| Shape | Square |
| Installation depth | 12 mm |
| Scope of delivery | Incl. microprismatic cover |
| Weight | 3.426 kg |
| Conformance | CE, UKCA |



LED insert panel 620 x 620 mm

Article no. 12088003

| Lighting technology | |
|------------------------------|----------|
| Colour temperature | 3.000 K |
| Light colour | White |
| Luminous flux | 4,380 lm |
| System efficiency | 104 lm/W |
| Colour rendering | CRI > 80 |
| Beam angle | 120° |
| Glare evaluation | UGR < 19 |
| Adjustable color temperature | No |

| Operating technology of the luminaire | |
|---------------------------------------|--|
| AC nominal voltage max | 230 V |
| Frequency max | 50 Hz |
| Lamp | LED |
| Lamp holder | Without fitting |
| Protection class | |
| Degree of protection | IP20 |
| Control | on/off |
| Rulh shanga nassible | The light source of this luminaire may only be replaced by the manufacturer or a service |
| Bulb change possible | technician commissioned by him or a similarly qualified person. |
| Energy efficiency class | nicht erforderlich |

| Mounting technology | |
|-----------------------|---|
| Mounting method | Recessed mounting |
| Place of installation | Ceiling-mounted |
| Adjustability | Not adjustable |
| Further references | No cover with thermal insulation material |

| Packing data | |
|-------------------------|--|
| Gross weight | 4.005 kg |
| Length of packaging | 705 mm |
| Packaging width | 673 mm |
| Packaging hight | 45 mm |
| | This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. |
| Disposal at end of life | By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment. |

Optional accessories

Article no.: 81088000 Pendant set for Panel 12088 ..

https://www.brumberg.com/fileadmin/products/Datenblatt_81088000_2021_DE.pdf