


LED dimmer 24 V DC, DALI-, 1-10 V-, PUSH-dimmable

Article no. 17502000

Light.
For Generations.

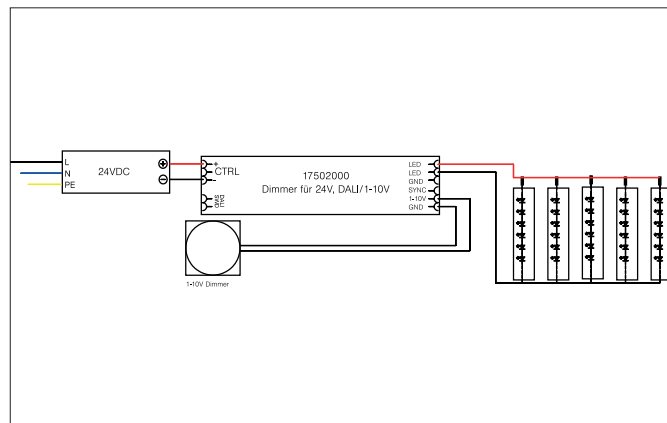

Tender
LED dimmer 24 V DC, DALI-, 1-10 V-, PUSH-dimmable. Single-channel (one-color) LED dimmer for constant voltage operation (24 V DC). Wiring is carried out using plug terminals. Cable cross section: 0.5 - 2.5 mm². An external power supply is required for operation. Output signal (dimming): PWM (pulse width modulation). With protection against overload, short-circuit, overtemperature and idle run, maximum output current: 5 A. The device can be controlled using DALI or a push-button (Push-dim) or 1-10 V. In order to increase the power, multiple devices can be operated as master / slave. Material: Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Voltage: 24V DC, Power: 120 W, Control: DALI.

Article data	
Article no.	17502000
GTIN	4250047782070
Short description	LED dimmer 24 V DC, DALI-, 1-10 V-, PUSH-dimmable
Material	Plastic
Length	183 mm
Width	33 mm
Height	23 mm
Weight	0.081 kg

LED dimmer 24 V DC, DALI-, 1-10 V-, PUSH-dimmable
Article no. 17502000

Light.
For Generations.

Operating technology of driver	
Protection class	II
Degree of protection	IP20
Power min	0 W
Power max.	120 W
Control	DALI, 1-10 V, PUSH-Dimm
Environment temperature (ta)	0°C up to 40°C
Measure point (tc)	max. +55 °C

Packing data	
Gross weight	0.105 kg
Length of packaging	45 mm
Packaging width	35 mm
Packaging height	190 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>