




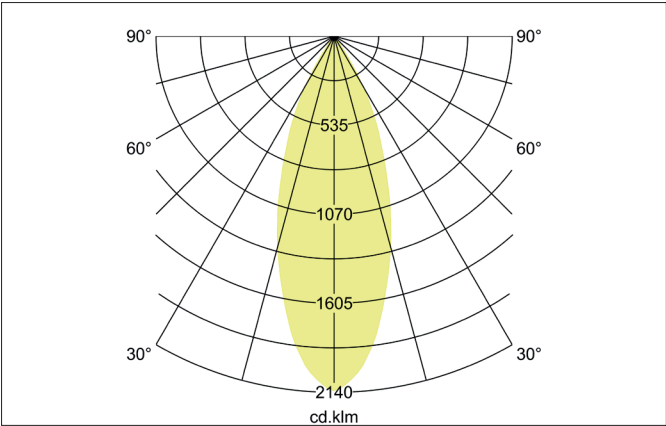

**TRAXX MINI LED semi-recessed spotlight, on/off switchable**  
Article no. 88784163

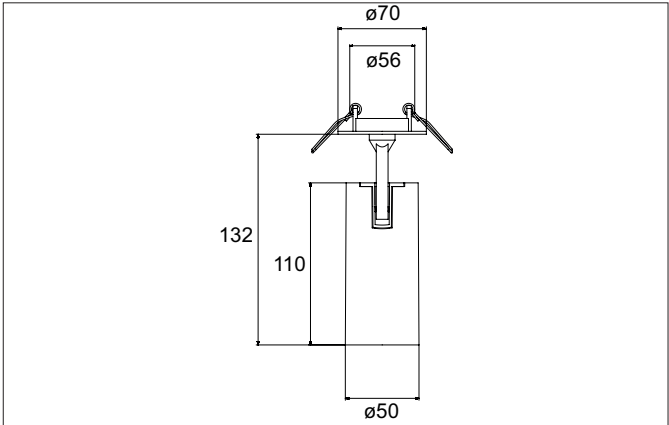

**Tender**  
Round LED semi-recessed spotlight, rotatable and tiltable, switchable, ceiling cut-out Ø 56 mm, installation depth 50 mm, weight 0.300 kg, with rotationally symmetrical narrow-wide beam light distribution. Transparent glass cover, rated luminous flux 1,740 lm, rated wattage 1 x 14.5 W, warm white light color, most similar color temperature (CCT) 3,000 K, general color rendering index CRI > 90, service life L80/B50 at 25 °C: 50,000 h, housing material: aluminum, color: textured silver, permissible ambient temperature (ta): -20 °C - +25 °C, protection class (EN 61140): II, degree of protection (DIN EN 60529): IP20. With electronic control gear, switchable.

| Article data       |                                                |
|--------------------|------------------------------------------------|
| Article no.        | 88784163                                       |
| GTIN               | 4251433972310                                  |
| Series name        | TRAXX MINI                                     |
| Short description  | LED semi-recessed spotlight, on/off switchable |
| Material           | Aluminium                                      |
| Colour             | Silver                                         |
| Type of surface    | Structure                                      |
| Shape              | Round                                          |
| Built-in diameter  | 56 mm                                          |
| Installation depth | 50 mm                                          |
| Weight             | 0.300 kg                                       |
| Conformance        | CE, UKCA                                       |


**TRAXX MINI LED semi-recessed spotlight, on/off switchable**

Article no. 88784163

| Lighting technology          |            |
|------------------------------|------------|
| Colour temperature           | 3.000 K    |
| Light colour                 | White      |
| Light output                 | Direct     |
| Luminous flux                | 1,740 lm   |
| System efficiency            | 120 lm/W   |
| Colour rendering             | CRI > 90   |
| Reflector                    | High-gloss |
| Beam angle                   | 40°        |
| Light sharing                | Symmetric  |
| Adjustable color temperature | No         |

| Operating technology of the luminaire |                                                                                                                                                          |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| System output                         | 14.5 W                                                                                                                                                   |
| Voltage type                          | AC                                                                                                                                                       |
| AC nominal voltage max                | 230 V                                                                                                                                                    |
| Frequency max                         | 50 Hz                                                                                                                                                    |
| Lamp                                  | LED                                                                                                                                                      |
| Protection class                      | II                                                                                                                                                       |
| Degree of protection                  | IP20                                                                                                                                                     |
| Control                               | on/off                                                                                                                                                   |
| Bulb change possible                  | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |
| Rated life time L80/B50 at 25 °C      | 50.000 h                                                                                                                                                 |
| Energy efficiency class               | nicht erforderlich                                                                                                                                       |

| Mounting technology         |                                           |
|-----------------------------|-------------------------------------------|
| Mounting method             | Recessed mounting                         |
| Place of installation       | Ceiling-mounted                           |
| Adjustability               | Rotable and pivoted                       |
| Swivel angle                | 90°                                       |
| Rotation angle              | 350°                                      |
| Head adjustable angle       | 90°                                       |
| Further references          | No cover with thermal insulation material |
| Material cover              | Glass transparent                         |
| Suitable for through-wiring | No                                        |

| Packing data            |                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gross weight            | 0.35 kg                                                                                                                                                                                                                                                                                                                                                                        |
| Length of packaging     | 50 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Packaging width         | 50 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Packaging height        | 171 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |