
BRUMBERG

ADAPTwall LED wall recessed light, for device socket Article no. 10371083

Light. For Generations.



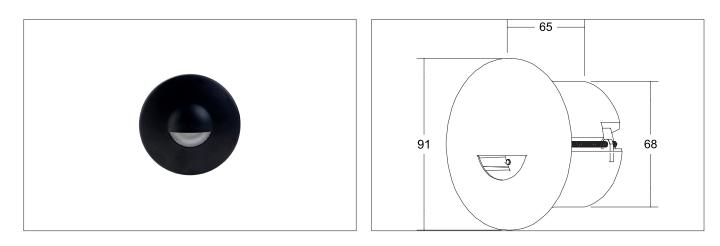

Tender

LED wall recessed light, for device socket, Round. Ceiling cut-out Ø 68 mm, Installation depth 65 mm, Outer diameter 91 mm, Weight 0,173 kg, asymmetric ,Luminous flux 180 lm, Power 1 x 2 W, Light colour warm white, Correlated color temprature (CCT) 3.000 K, Colour rendering index CRI > 80, Rated life time L70/B50 at 25 °C: 35.000 h, Housing material: Aluminium / Steel / Plastic, Colour: Black, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): II, Degree of protection (DIN EN 60529): IP20, .With electronic driver, on/off switchable.

Article data	
Article no.	10371083
GTIN	4251433953760
Series name	ADAPTwall
Short description	LED wall recessed light, for device socket
Material	Aluminium / Steel / Plastic
Colour	Black
Type of surface	Matt
Shape	Round
Outer diameter	91 mm
Built-in diameter	68 mm
Installation depth	65 mm
Hight	12 mm
Weight	0.173 kg
Conformance	UKCA

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 19.05.2024 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/

ADAPTwall LED wall recessed light, for device socket Article no. 10371083

Light. For Generations.

BRUMBERG

Lighting technology	
Colour temperature	3.000 К
Light colour	White
Luminous flux	180 lm
System efficiency	90 lm/W
Colour rendering	CRI > 80
Reflector	Without
Light sharing	Asymmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	2 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Lamp	LED
Lamp holder	Without fitting
Protection class	
Degree of protection	IP20
Control	on/off
Pulh change possible	The light source of this luminaire may only be replaced by the manufacturer or a service
Bulb change possible	technician commissioned by him or a similarly qualified person.
Rated life time L70/B50 at 25 °C	35,000 h

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Wall-mounted
Adjustability	Not adjustable
Material cover	Without cover

Packing data	
Gross weight	0.204 kg
Length of packaging	105 mm
Packaging width	90 mm
Packaging hight	55 mm
	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.
Disposal at end of life	By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that
	harmful substances get into the environment.

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 19.05.2024 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/