
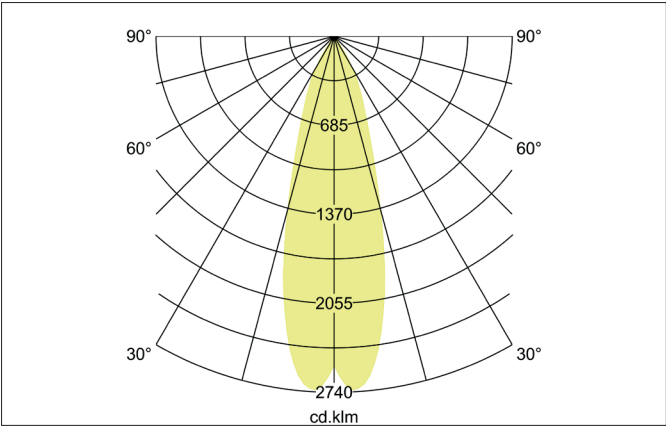


**TRAXX MICRO LED surface mounted spot, on/off switchable**  
Article no. 88813165

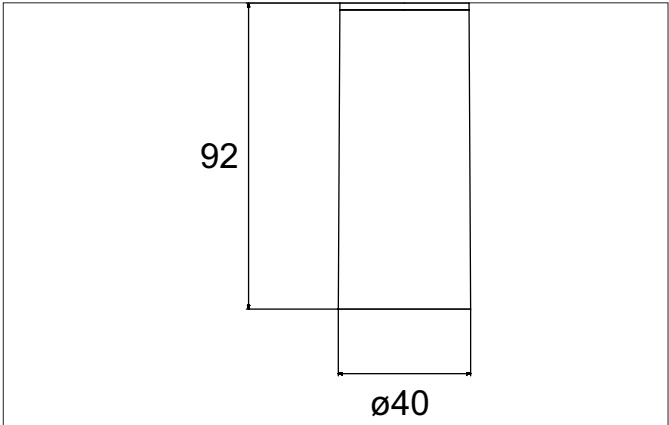

**Tender**  
LED surface mounted spot, on/off switchable, Round.Luminaire diameter 50.0 mm, Hight 113.0 mm Weight 0.197 kg,Reflector silver with rotationssymmetrical, deep, wide distributed light intensity. Cover glass transparent. Luminous flux 1.093 lm, Power 1 x 9 W, Light colour neutral white, Correlated color temprature (CCT) 3.500 K, Colour rendering index CRI > 90, Rated life time L80/B50 at 25 °C: 50.000 h, Housing material: Aluminium / Glass / Plastic, Colour: Silver structure, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP20. With electronic driver, on/off switchable.

| Article data      |   |
|-------------------|---|
| Article no.       | 88813165  |
| GTIN              | 4251433976318   |
| Series name       | TRAXX MICRO   |
| Short description | LED surface mounted spot, on/off switchable               |
| Material          | Aluminium / Glass / Plastic                               |
| Colour            | Silver  |
| Type of surface   | Structure   |
| Shape             | Round   |
| Outer diameter    | 50 mm   |
| Hight             | 113 mm  |
| Scope of delivery | Incl. converter for connection to the 230-V mains voltage |
| Weight            | 0.197 kg  |
| Conformance       | CE, UKCA  |

**TRAXX MICRO LED surface mounted spot, on/off switchable**

Article no. 88813165

| Lighting technology          |            |
|------------------------------|------------|
| Colour temperature           | 3.500 K    |
| Light colour                 | White      |
| Light output                 | Direct     |
| Luminous flux                | 1,093 lm   |
| System efficiency            | 121 lm/W   |
| Colour rendering             | CRI > 90   |
| Reflector                    | High-gloss |
| Reflector colour             | silver     |
| Beam angle                   | 30°        |
| Light sharing                | Symmetric  |
| Adjustable color temperature | No         |

| Operating technology of the luminaire |  |
|---------------------------------------|--|
| System output                         | 9 W  |
| Voltage type                          | AC   |
| AC nominal voltage max                | 230 V  |
| Frequency max                         | 50 Hz  |
| Lamp                                  | LED  |
| Lamp holder                           | Without fitting  |
| Protection class                      | I  |
| Degree of protection                  | IP20   |
| Dimmable                              | No   |
| Control                               | on/off   |
| Bulb change possible                  | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |
| Rated life time L80/B50 at 25 °C      | 50.000 h   |

| Mounting technology         |                   |
|-----------------------------|-------------------|
| Mounting method             | Surface mounting  |
| Place of installation       | Ceiling-mounted   |
| Adjustability               | Not adjustable    |
| Material cover              | Glass transparent |
| Suitable for through-wiring | No                |

| Packing data            |  |
|-------------------------|--|
| Gross weight            | 0.261 kg   |
| Length of packaging     | 170 mm   |
| Packaging width         | 170 mm   |
| Packaging height        | 110 mm   |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |